

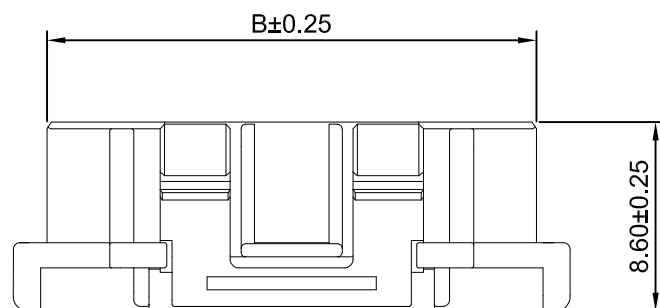
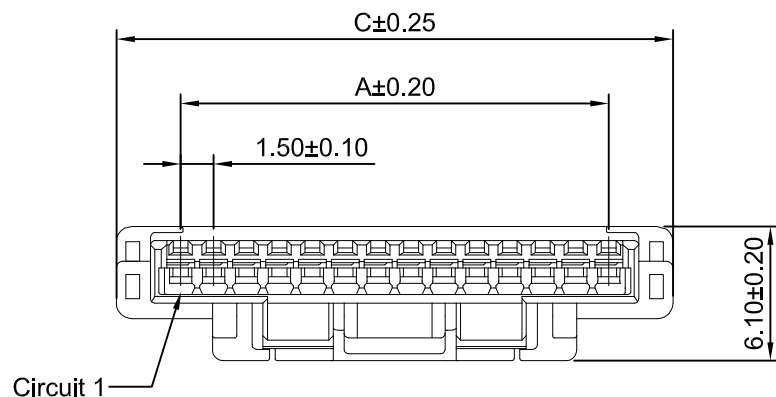


2P,3P



4P,5P



6P~15P

Ordering Information:

A1501HA-XP - ***


1 2

1.Part No.

2.Material:

(blank):PBT,UL94V-0

GWT:Nylon 66,UL94V-0(Beige),IEC 60335-1,5th
Edition Glow Wire Capable.

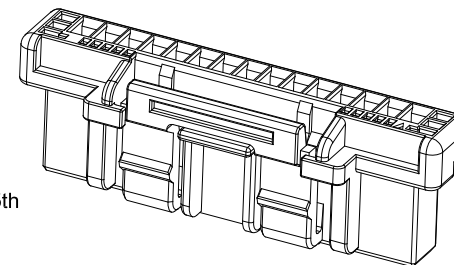

SPECIFICATIONS:

Current Rating: 2A AC,DC (AWG #24)

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: PBT,UL94V-0(Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.50	4.20	7.30	9P	12.00	14.70	17.80
3P	3.00	5.70	8.80	10P	13.50	16.20	19.30
4P	4.50	7.20	10.30	11P	15.00	17.70	20.80
5P	6.00	8.70	11.80	12P	16.50	19.20	22.30
6P	7.50	10.20	13.30	13P	18.00	20.70	23.80
7P	9.00	11.70	14.80	14P	19.50	22.20	25.30
8P	10.50	13.20	16.30	15P	21.00	23.70	26.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1
DRAWN	CHK'D	APPR
Wenmin Luo	Diankui Wan	Jack Yin

1.50mm PITCH
HOUSING

A2	CHANGE THE Current Rating	2021.08.27
A1	Change of drawings	2015.05.13
A0	NEW RELEASE	2013.04.17
REV	DESCRIPTION	DATE

General Tolerances	THIRD ANGLE PROJECTION
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°	

DRAWING NO.

A1501HA-XP

REV
A2