

CEP-12RS-J19A

工业平板电脑CEP系列

工业无风扇触摸一体机

采用12.1" 全平面五线电阻屏, Intel BayTrail J1900平台


Industrial fanless Panel PC, 12.1" 5-Wire Resistive Touch, Intel BayTrail J1900 platform



- | | |
|--|--|
| 板载Intel® Celeron® J1900高性能低功耗四核处理器, 主频最大可以达到2.0GHz | Onboard Intel® Celeron® J1900 quad core CPU, main frequency can reach to 2.0GHz |
| 12.1寸 450nits高亮LED背光显示屏, 前面框支持IP65防护等级 | 12.1 inches 450nits highlight LED panel, front panel can support IP65 |
| 铝合金的机身使其轻薄、坚固稳定、散热效果更好 | Aluminum alloy structure makes it light, firm and stable, and has better heat dissipation effect |
| 工业等级五线全平面电阻触摸屏 | Industrial-grade true-flat 5-wire resistive touch screen |
| 内置Mini-PCIe/M.2支持多种模块扩展 | Support Mini-PCIe/M.2 extension of multiple modules |
| 支持双千兆网口 | Support dual GbE LAN |
| 宽压9~36V DC-IN, 可锁附凤凰端子接口 | Wide voltage 9~36V DC-IN, lockable phoenix connector |
| 支持远程开关 | Support remote ON-OFF |
| 产品外壳接地保护 | Grounding protection for product shell |
| 支持标准VESA及嵌入式安装方式 | Support standard VESA and panel mount |



■ 尺寸 Dimension (Unit:mm)

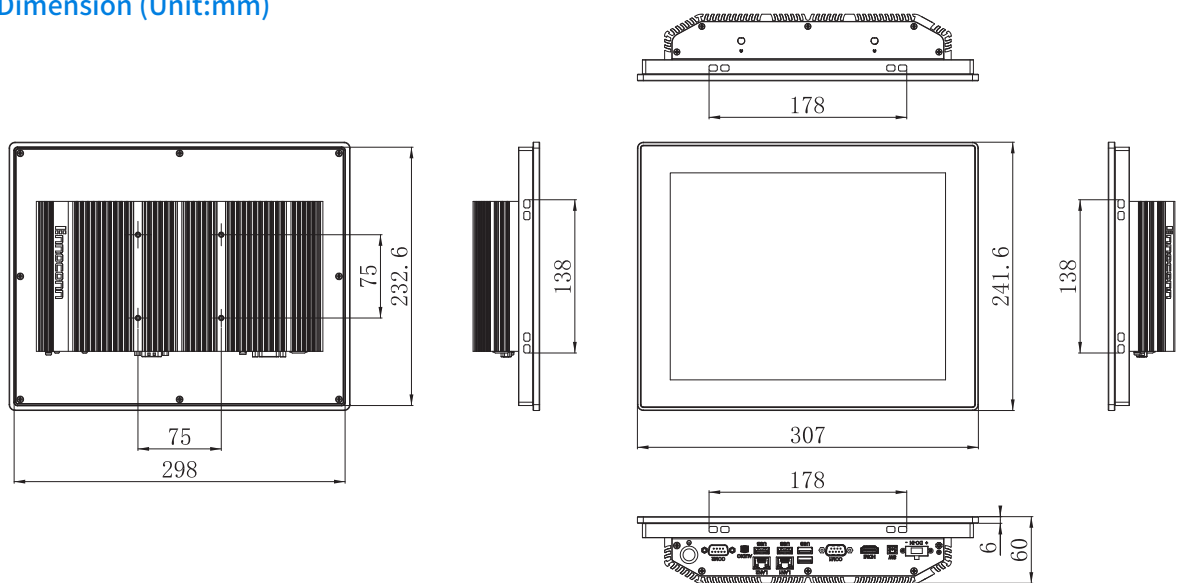

■ 规格 Specification

系统 System		触摸屏 Touchscreen	
处理器 Processor	Intel® Bay Trail Celeron® J1900 processor (2.00 GHz)	触摸屏 Touch Type	全平面五线电阻屏 5-Wire Resistive Touch
内存 Memory	1 x DDR3L 1333/1600 SO-DIMM slot, up to 8GB	触控 Touch	35,000,000 times
存储 Storage	1 x M.2 2242 SSD slot / 1 x mSATA	外部接口 External I/O	
图形 Graphics	Intel® HD Graphics for Intel® Atom® Processor Z3700 Series	串口 COM	2 x RS232/RS422/RS485 (COM1~2)
操作系统 OS	Windows 7/8.1/10, Linux	USB	3 x USB2.0, 1 x USB3.0
看门狗定时器 Watchdog Timer	Programmable 255 levels timer interval, from 1~255 sec/min	网口 Ethernet	2 x RJ45, Intel® I211AT GbE (10/100/1000 Mbps)
显示屏 Display		显示 Video	1 x HDMI (up to 1920 x 1200)
尺寸 Size	12.1 inches	音频 Audio	1 x Audio(Line-out&Mic-in 2 in 1), Realtek® ALC269 HD Audio codec
分辨率 Resolution	1024(H) x 768(V)	远程开关 Remote ON-OFF	1 x Remote ON-OFF
屏幕宽高比 Ratio	4:3	电源输入 Power Input	1 x Power Connector (2P Phoenix)
亮度 Brightness	450 nits	内部接口 Internal I/O	
可视角 Viewing Angle	80° (R)/80° (L) 80° (U)/80° (D)	扩展接口 Expansion	1 x Mini-PCIe slot (PCIe/SATA signal supported) 1 x M.2 2230 slot (WiFi supported) 1 x SIM socket
对比度 Contrast Ratio	700	环境 Environmental	
背光 Backlight	LED Backlight	操作温度 Operation Temp.	-10°C ~ 60°C (SSD)
背光寿命 Backlight Lifetime	50000Hrs	存储温度 Storage Temp.	-40°C ~ 70°C
机构 Mechanical		湿度 Relative Humidity	5% ~ 95%, 非凝结状态 Non-condensing
前框 Front Panel	铝 Aluminum	随机振动 Random Vibration	5~500Hz, 2Grms (SSD)operation
铝挤 Heat-Sink	铝 Aluminum	正弦振动 Sine Vibration	5~500Hz, 2G Non-operation
底板 Rear Cover	铁 SECC	机械冲击 Shock	10g 11ms operation, 30g 11ms Non-operation
安装方式 Mounting	Panel Mount, Wall and VESA-mount (75 x 75mm)	前面板防护 Ingress Protection	Front panel IP65
尺寸 Dimension	307(W) x 241.6(H) x 60(D)mm	认证 Certification	
建议开孔尺寸 Cut Out	299 x 233.6mm	安规认证 Safety Certification	CCC/CE/FCC
重量 Weight	2.9kg	电源 Power	
电源 Power		电源输入 Power Input	9~36V DC

■ 订购清单 Order List

	型号 Model	描述 Description		型号 Model	描述 Description
标配 Standard	34046QH00-GLA-G	1x2P DC in Phoenix conn(5.00), female	选配 Optional	CTO-060W-FSP0	CEA-060W-FSP0,FSP 60W adapter,150cm power cord
	35106A500-OR3-G	1x2P Remote conn(2.00), 300mm		CTO-060W-LT00	CEA-060W-LT00,LITEON 60W adapter,150cm power cord
	1A03DV400-88A-G	panel hook (4pcs in 1 package)			

注

此为样本, 仅供参考, 一切配置以合同或实物为准, 如有修改恕不另行通知;
版权为桦汉科技所有, 未经桦汉科技书面许可, 样本中的任何内容不得被复制或抄袭用于任何目的。

关注桦汉科技
了解更多资讯

