

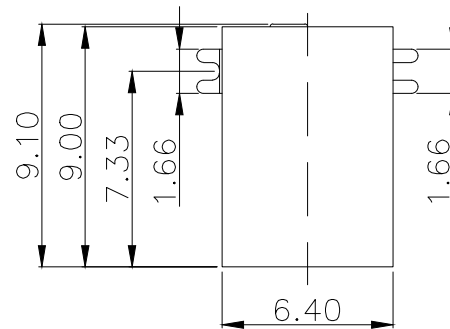
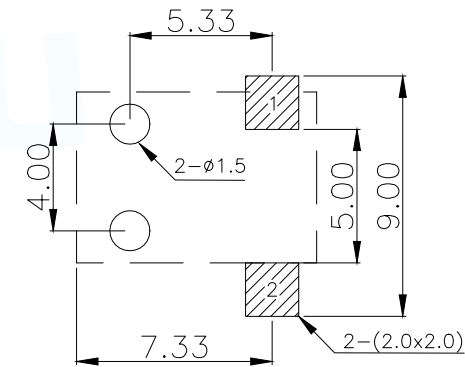



RECOMMEND PULG

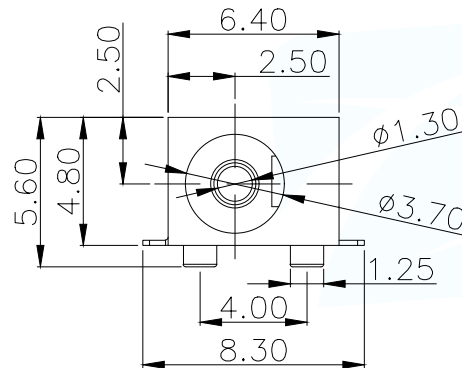

PCB.WELDING DRAWING (TOLERANCE:±0.05)

Main technical performance	
Rated electrical load	DC 12V 2A
Contact resistance	≤0.03Ω
Insulation resistance	≥100MΩ DC250V
Pressure resistance	AC 500V 1min
Insertion force	3-30N
Operating temperature range	-20℃~+70℃
service life	5000cycles



SCHEMATIC

2	TIP SPRING	1	PHOSPHOR BRONZE	MB:CuSn PLATED
1	CENTER PIN	1	BRASS	MB:CuSn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK
MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: DC SOCKET		
DECIMALS:		PAR		DC-047-B130
ANGLES:		DWN		
X.X±0.30		CHKD		
X.XX±0.25		APVD		
X.XXX±0.15		SCALE N/A		UNIT:MM
CUSTOMER COPY		SIZE:A4		SHEET:1F1
				REV:A