



SPECIFICATIONS

- 1. CASE:
18 GA. (.048) CRS, TIN PLATED
- 2. RATED CURRENT:
3 x 25A @ 400Hz
3 x 30A @ 50/60Hz
- 3. RATED VOLTAGE:
125/220V, 400Hz
250/440VAC, 50/60Hz
- 4. TEST VOLTAGE:
LINE TO NEUTRAL: 1.7KVDC
LINE TO GROUND: 2.2KVDC
- 5. LEAKAGE CURRENT:
3.6mA @ 250VAC, 50Hz

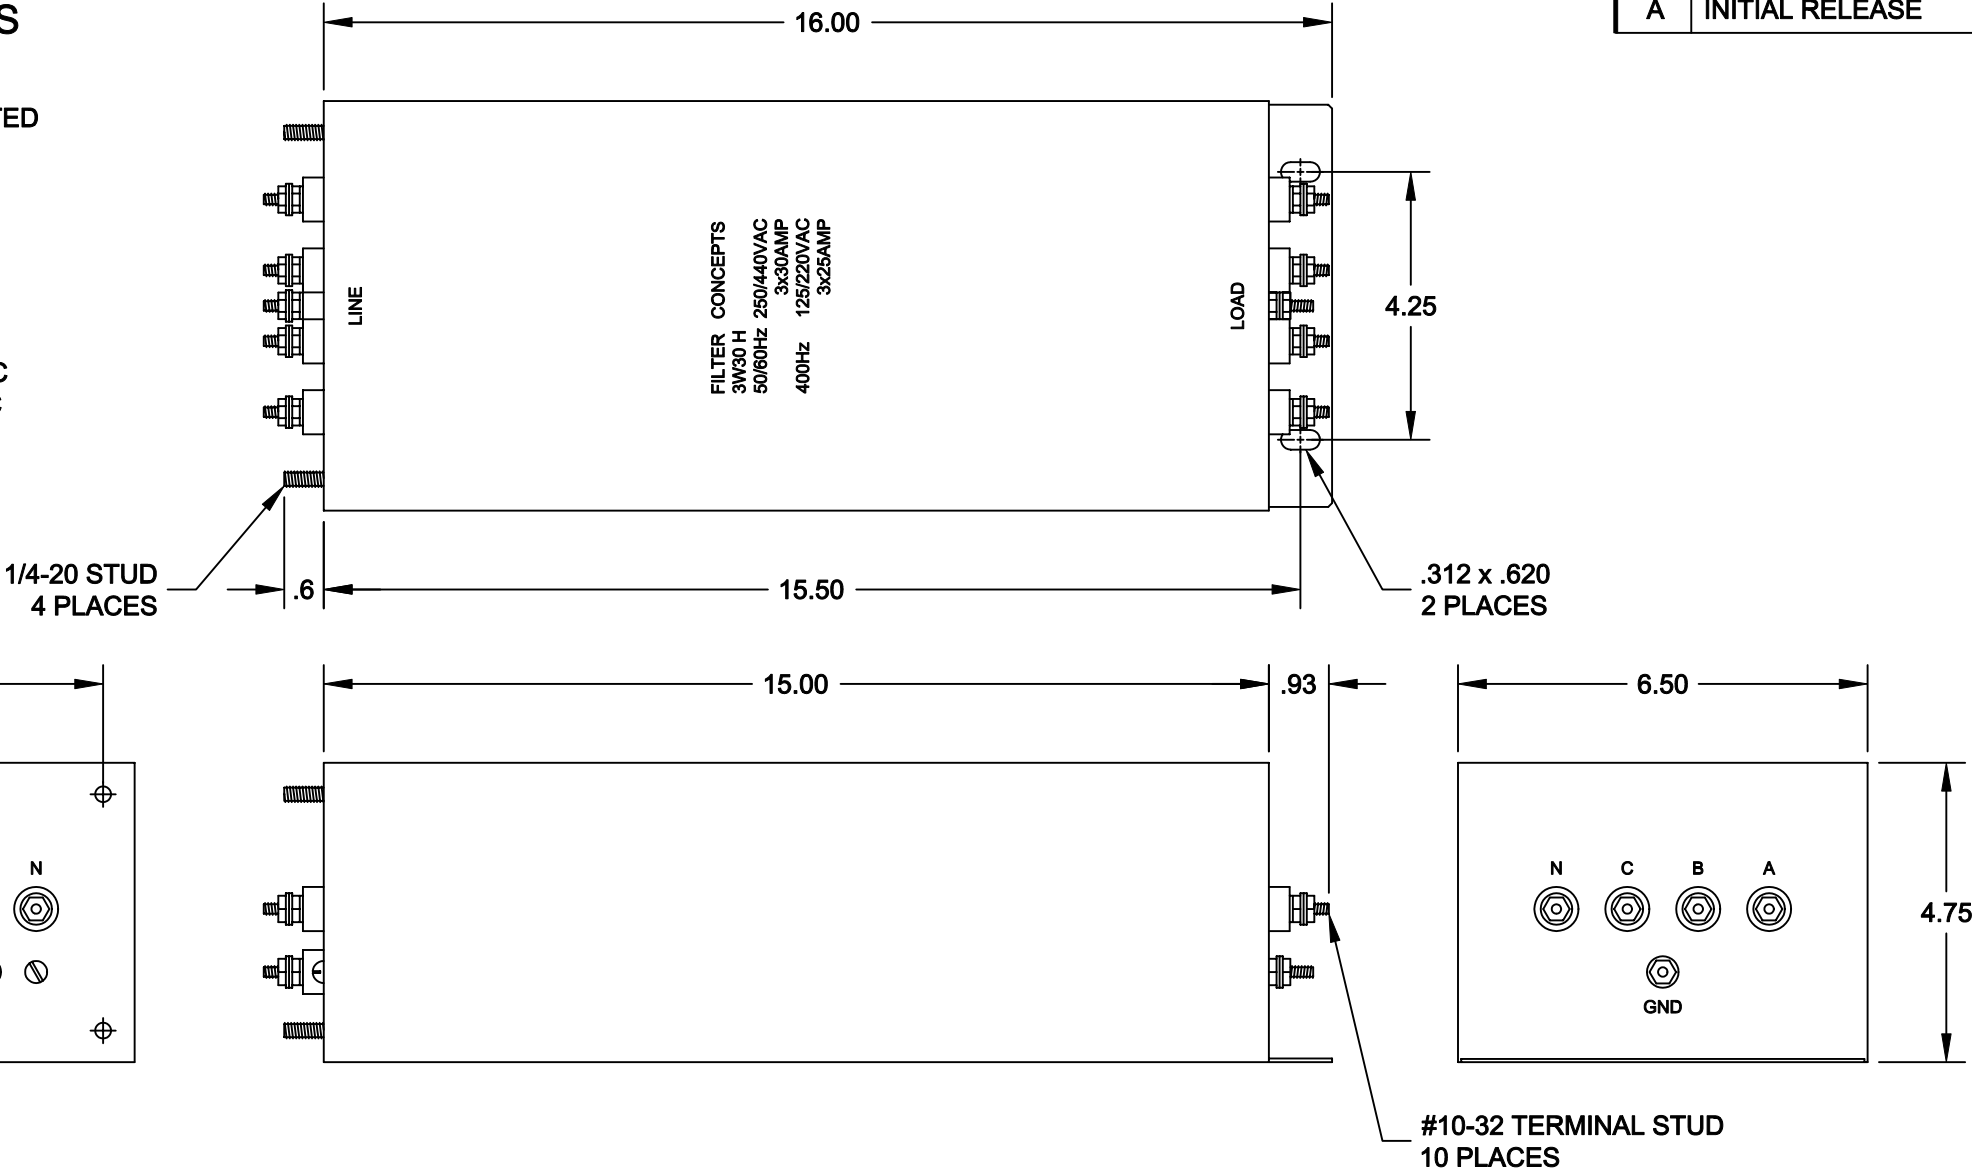

SCHEMATIC

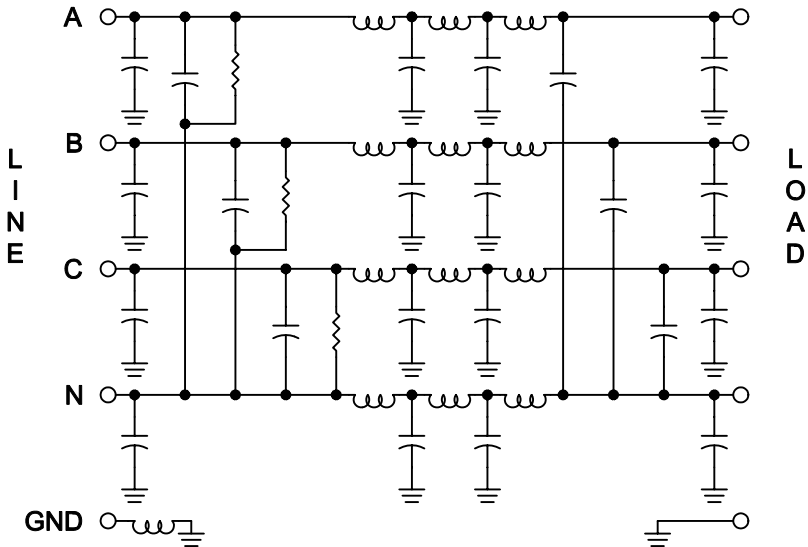

INSERTION LOSS (50Ω TYPICAL)

	.05 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	50 MHz
L/N	52 db	65 db	65 db	65 db	65 db	60 db
L/G	40 db	60 db	65 db	65 db	65 db	60 db

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Astrodyne TDI:](#)

[3W30 H](#)