#### **PLASTI-GRIP**

TE Internal #: 1-34243-1

Butt Splice, 22 – 16 AWG Wire Size, .3 – 1.42 mm<sup>2</sup> Wire Size,


Serrated, 509 – 3260 CMA Wire Size, Copper, Red, PLASTI-GRIP,

Splices

View on TE.com >



Terminals & Splices > Splices

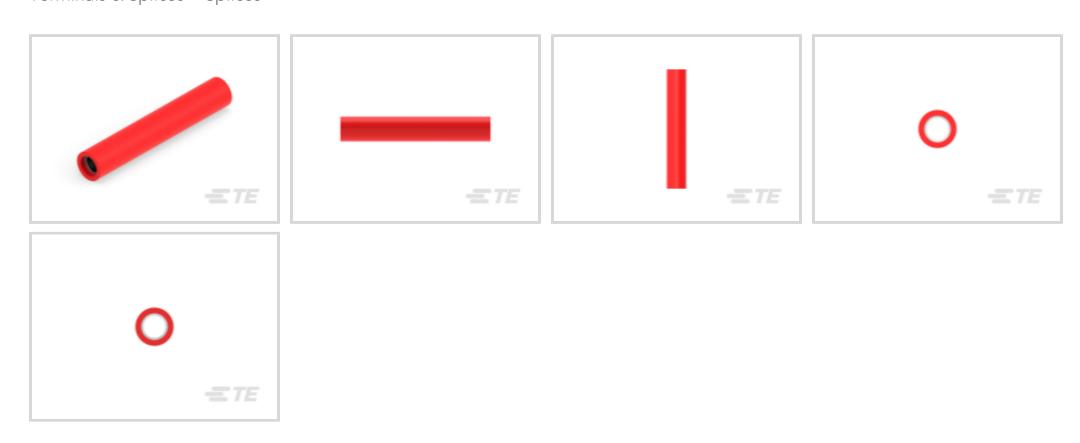

Splice Type: Butt Splice
Wire Size: .3 – 1.42 mm²

Sealable: No

Splice Features: Serrated

### **Features**

### Product Type Features

Splice Accessory Type	Splice
Splice Type	Butt Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Insulation Support

### **Configuration Features**

Compatible With Wire & Cable Type	Discrete Wire	
-----------------------------------	---------------	--

### **Body Features**

Insulation Material	Vinyl
Product Weight	1.232 g
Splice Features	Serrated
Primary Product Color	Red

#### **Contact Features**

Contact Base Material Copper	Copper
------------------------------	--------



Barrel Type	Closed
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	509 – 3260 CMA
Compatible Insulation Diameter Range	4.32 mm[.17 in]
Product Length	26.16 mm[1.03 in]
Usage Conditions	
Insulation Option	Fully Insulated
Operating Temperature Range	90 °C[221 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Splice	No
Packaging Features	
Packaging Quantity	2500

# **Product Compliance**

Packaging Method

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Tape Mounted

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Compatible Parts











# Also in the Series | PLASTI-GRIP








Crimp Wire Pins, Tabs & Ferrules(19)




Ring Terminals(300)







# Customers Also Bought















### **Documents**

### **Product Drawings**

PG BUTT SPLC 22-16COMM22-18MIL

English

#### **CAD Files**

**Customer View Model** 

ENG\_CVM\_CVM\_1-34243-1\_L.2d\_dxf.zip

English

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1-34243-1\_L.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-34243-1\_L.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### **Product Specifications**

**Application Specification** 

English

### Agency Approvals

**CSA Certificate** 

English

Butt Splice, 22 – 16 AWG Wire Size, .3 – 1.42 mm² Wire Size, Serrated, 509 – 3260 CMA Wire Size, Copper, Red, PLASTI-GRIP, Splices

