


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图纸修正，图面升级整理图面	2024.12.31	阿树

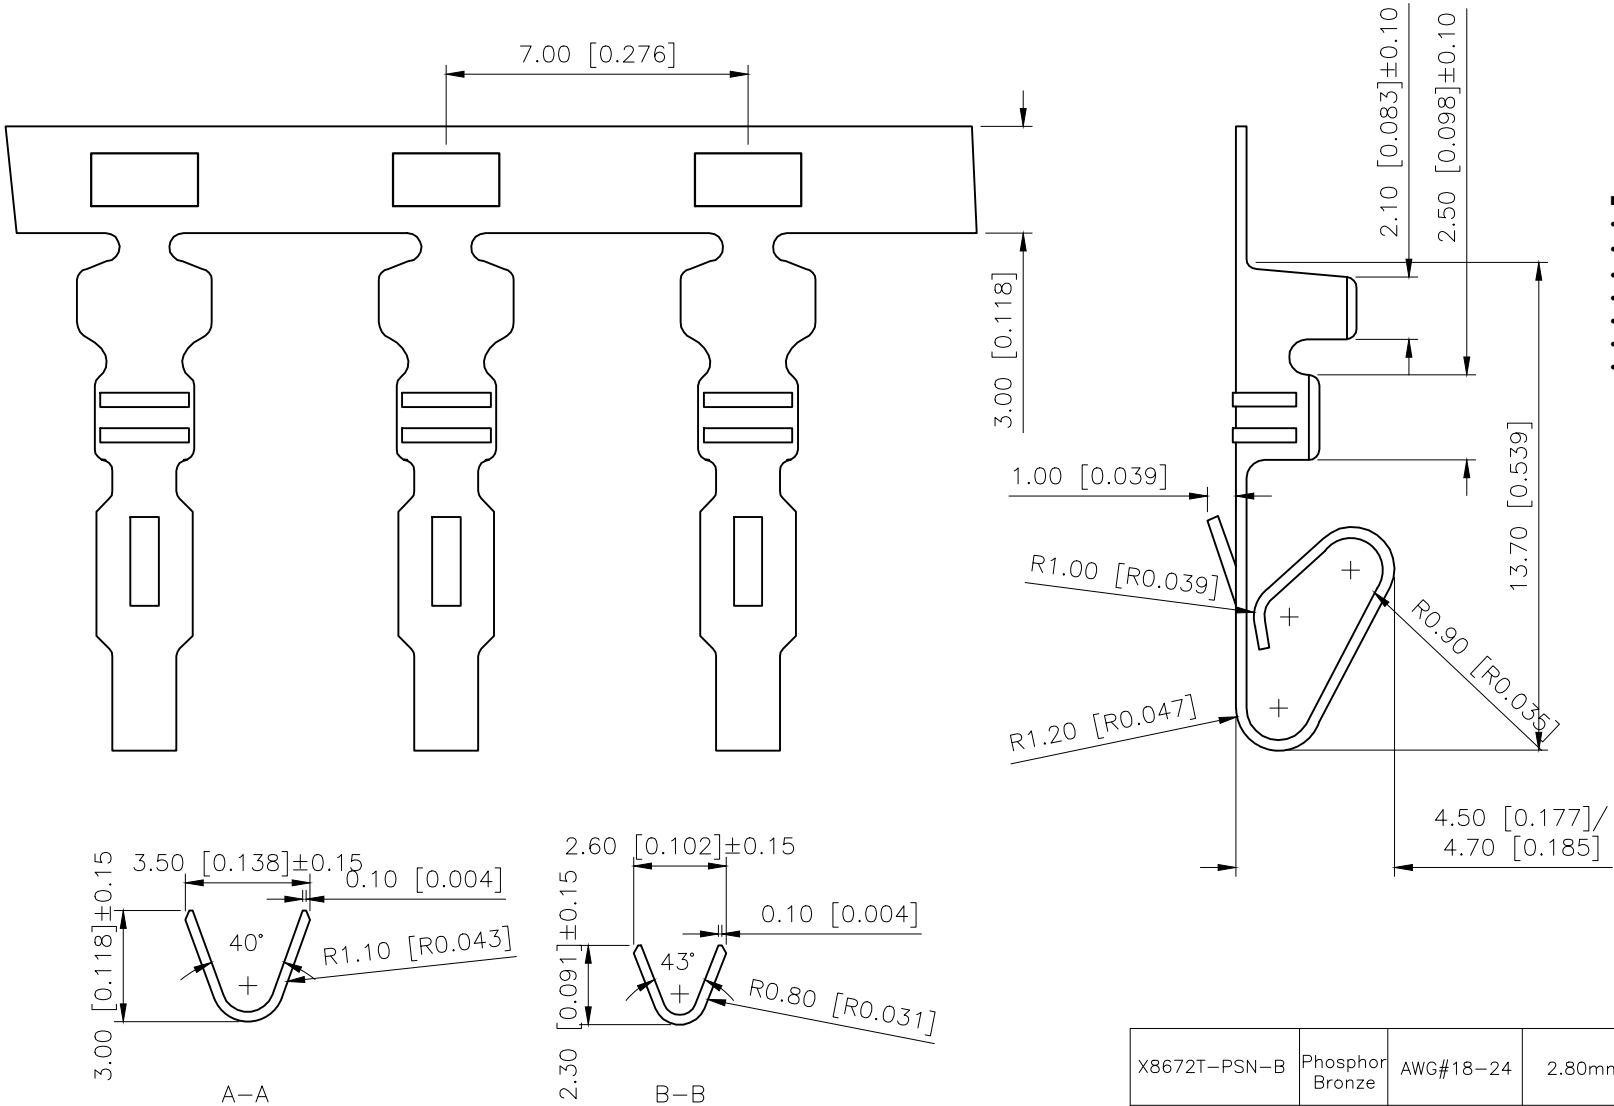

- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:7A AC/DC
 - Withstanding Voltage:1500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ
 - After environmental testing:≤20mΩ

PART NO.:

X8672 T-P SN-B
① ② ③ ④ ⑤

- ①Series No
②Category:T-Terminal
③Material:P-Phosphor bronze
④Plating Category:SN-Bright Tin Plating
⑤Special No:B-Match X8672H-XXB HSG

X8672T-PSN-B	Phosphor Bronze	AWG#18-24	2.80mm(Max)	Stamping Before Plating: 30u" MIN. Ni;70u" MIN. Sn	X8672H-B
PART NO	Material	Wire Range	Insulation O.D.	Suitable XKB Terminal	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	3.96mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X8672T-PSN-B
APPROVED		SIZE:	A4	DWG NO.:	