

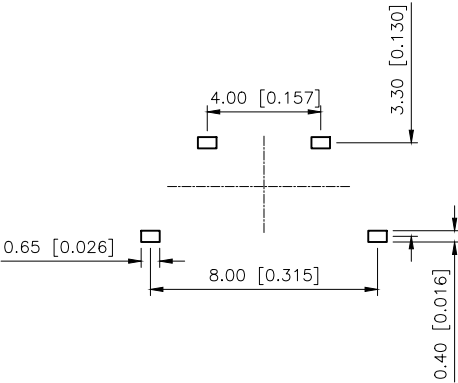
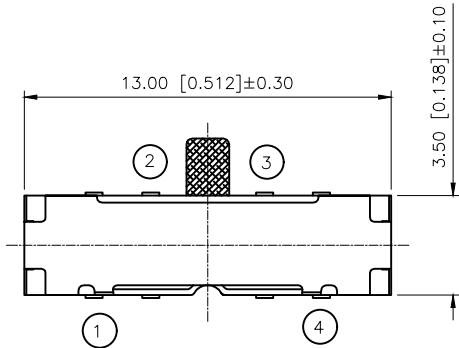
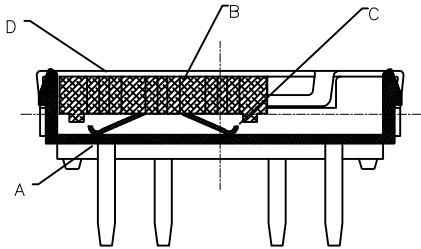
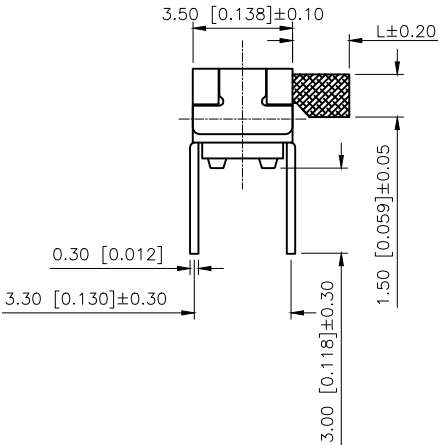


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		脚位序号修正，图面升级整理图面	2025.05.27	阿树

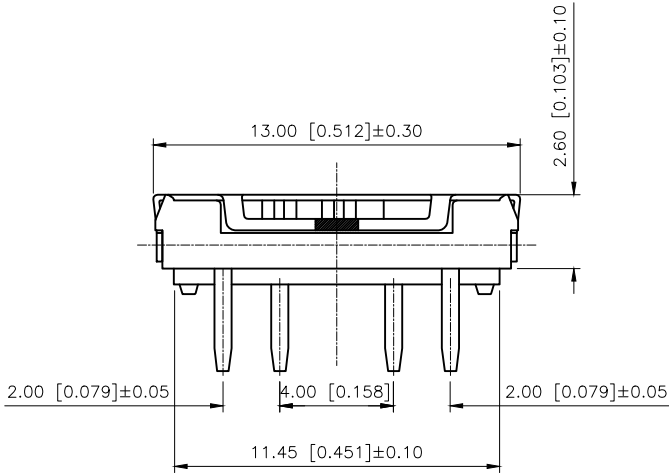

PAPT NO	L
SK-3346D-01-L1	2.0
SK-3346D-01-L2	3.0
SK-3346D-01-L3	4.0

额定电流、电压 Rate voltage current	50mA DC12V
绝缘电阻 Insulated resistance	100MQ min(DC100V)
耐压强度: Compressive strength	AC100V(50/60Hz foy 1minute)
寿命 life	10,000 cycles
操作力度: Operating force	250±100gf

4	Cover	1	Sus	silvery white
3	Terminal	2	Phosphor branze	Ag Plated
2	Keystake	1	Pa46	Black
1	Base	1	PPA+Brass	Black
ITEM	PAPT NAME	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	SLIDE SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	SK-3346D-01-X
APPROVED		SIZE:	A4	DWG NO.:	