

F

E

D

C

B

A

F


E

D

C

B

A

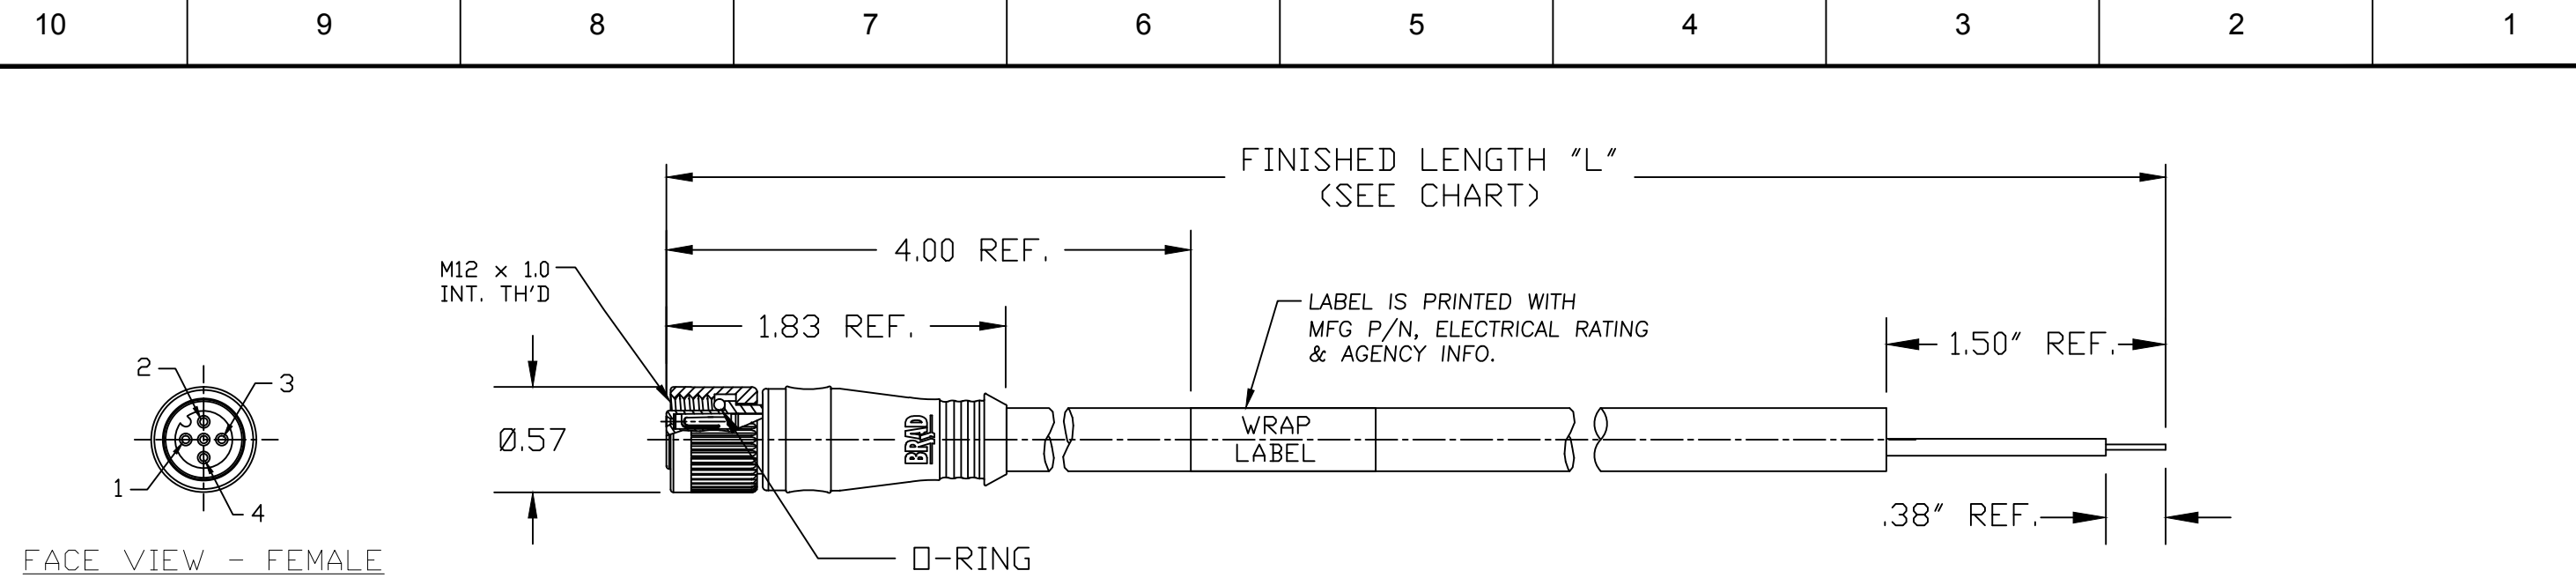

1	BROWN
2	WHITE
3	BLUE
4	BLACK

MOLEX SAP P/N#	ENGINEERING P/N#	"L" (Meters)	"L" (FEET)	TOLERANCE (INCH)
1200652358	804000KF3M050N	5.0 M	16' 5"	+6.50"/-0.00"
1200652359	804000KF3M100N	10.0 M	32' 10"	+12.50"/-0.00"

SPECIFICATIONS:

COUPLING NUT MATERIAL: ZINC DIECAST
WITH BLACK ELECTROPHORETIC COATING
CONTACT MATERIAL: GOLD/NICKEL OVER COPPER ALLOY
INSERT MATERIAL: BLACK NYLON
OVERMOLD MATERIAL: YELLOW TPE
O-RING MATERIAL: VITON

CABLE: #18/4 YELLOW TPE
10 MILLION CYCLE HI-FLEX
PLTC & FT4 RATED

ASSEMBLY RATING: 250V, 4A

ENVIRONMENTAL: -20°C TO 105°C
IP67 WHEN MATED

AGENCY: UL LISTED

RELEASED EC NO: IPG2015-1677 DRWN: RSTONE 2015/03/24 CHKD: BARDEN 2015/03/26 APPR: JFMURPHY 2015/04/20 A	DESCRIPTION REV	QUALITY SYMBOLS <div>▽=0</div> <div>▽C=0</div>	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE INCH		SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION <div>⊙</div> <div>□</div>			
				mm	INCH	DRAWN BY RSTONE	DATE 2015/03/24	MIC CORDSET ASSEMBLY 4P FEMALE STRAIGHT 18/4 TPE CABLE					
			4 PLACES	±---	±---	CHECKED BY BARDEN	DATE 2015/03/26						
			3 PLACES	±---	±---	APPROVED BY JFMURPHY		DATE 2015/04/20	MOLEX INCORPORATED <div>molex</div>				
			2 PLACES	±---	±.01								
			1 PLACE	±---	±---	MATERIAL NO. SEE CHART		DOCUMENT NO. SD-120065-102				SHEET NO. 1 OF 1	
			ANGULAR ±---°			SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										