


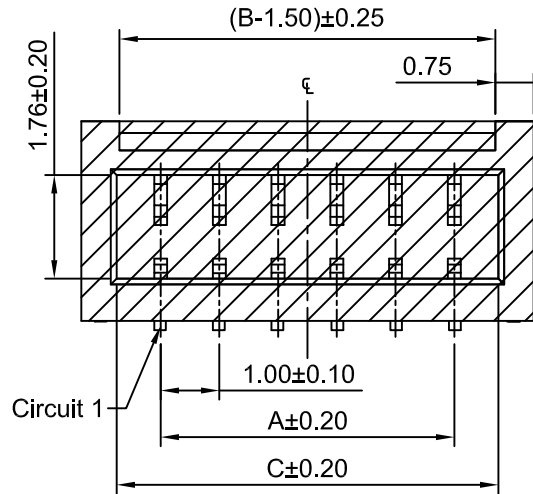
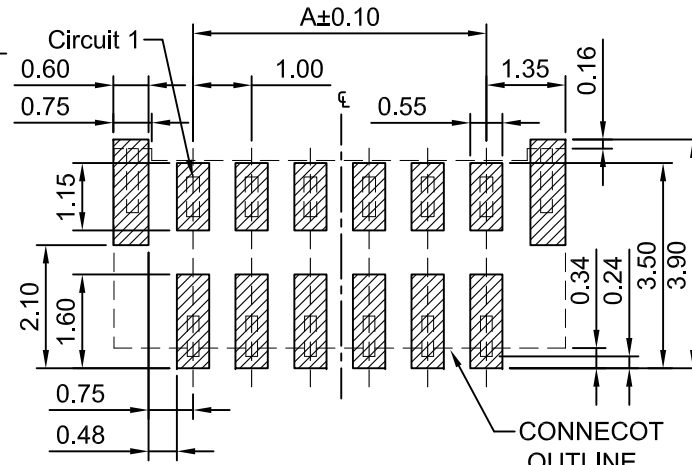





2P~6P

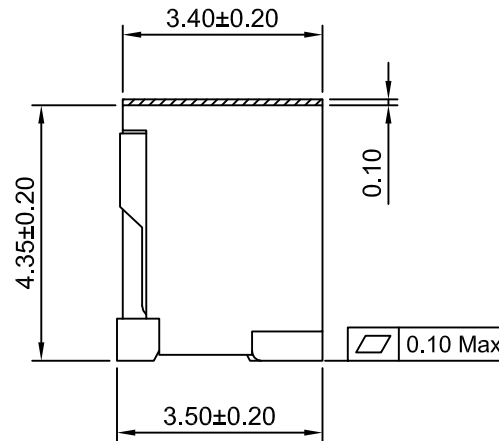


P.C.B LAYOUT (TOP VIEW)
TOLERANCE: ±0.05

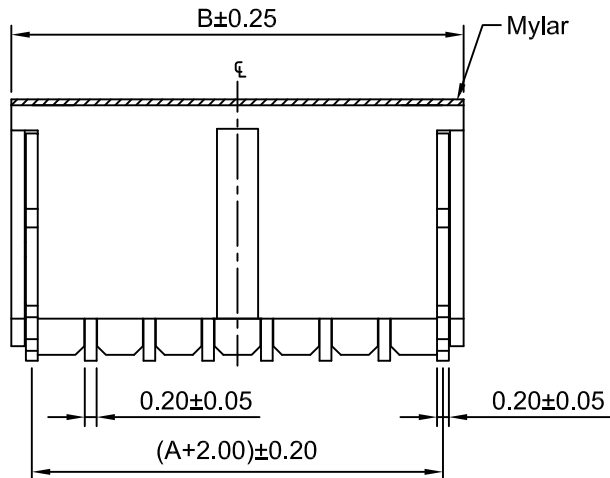

7P~12P

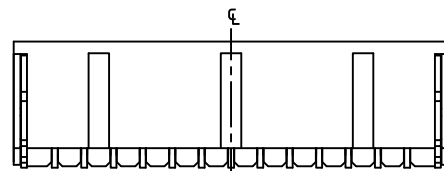

13P



SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Solder Tabs: Phosphor Bronze/Tin over Nickel
Material: Nylon 9T,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
A1002WVB-S-2P	1.00	3.70	2.50
A1002WVB-S-3P	2.00	4.70	3.50
A1002WVB-S-4P	3.00	5.70	4.50
A1002WVB-S-5P	4.00	6.70	5.50
A1002WVB-S-6P	5.00	7.70	6.50
A1002WVB-S-7P	6.00	8.70	7.50
A1002WVB-S-8P	7.00	9.70	8.50
A1002WVB-S-9P	8.00	10.70	9.50
A1002WVB-S-10P	9.00	11.70	10.50
A1002WVB-S-11P	10.00	12.70	11.50
A1002WVB-S-12P	11.00	13.70	12.50
A1002WVB-S-13P	12.00	14.70	13.50
A1002WVB-S-14P	13.00	15.70	14.50
A1002WVB-S-15P	14.00	16.70	15.50
A1002WVB-S-16P	15.00	17.70	16.50
A1002WVB-S-17P	16.00	18.70	17.50
A1002WVB-S-18P	17.00	19.70	18.50
A1002WVB-S-19P	18.00	20.70	19.50
A1002WVB-S-20P	19.00	21.70	20.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	8:1	1 of 1	1.00mm PITCH	
DRAWN	CHK'D	APPR	180° Wafer - SMT TYPE	
Haisen Li	Djankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xx±0.20 x.xx±0.15 ANGLES ±1°			A1002WVB-S-XP	
REV	DESCRIPTION	DATE	REV A3	

A3	CHANGE THE DRAWING	2022.02.25
A2	CHANGE THE DRAWING	2022.02.09
A1	CHANGE THE DRAWING	2020.03.20
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE