



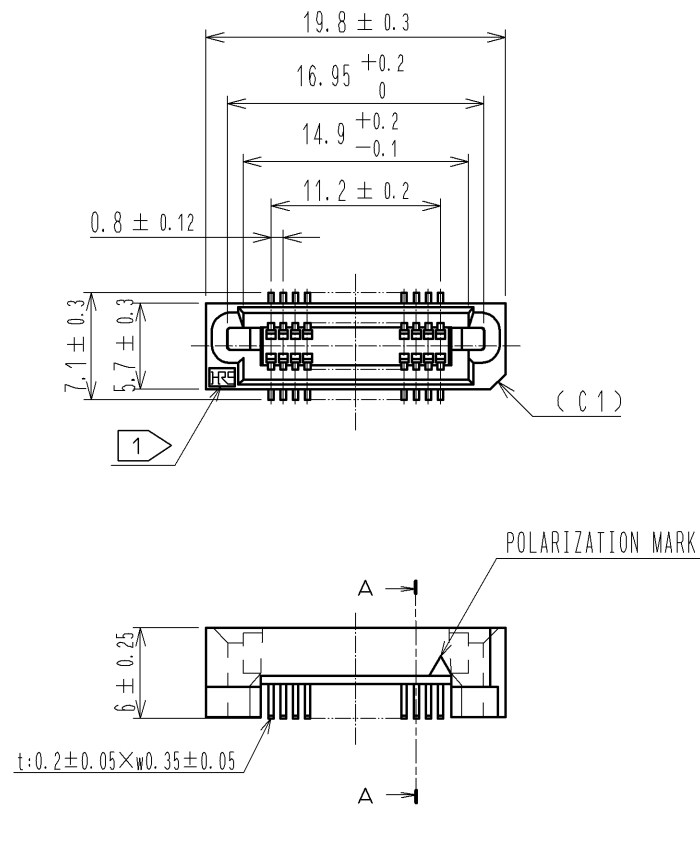



Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

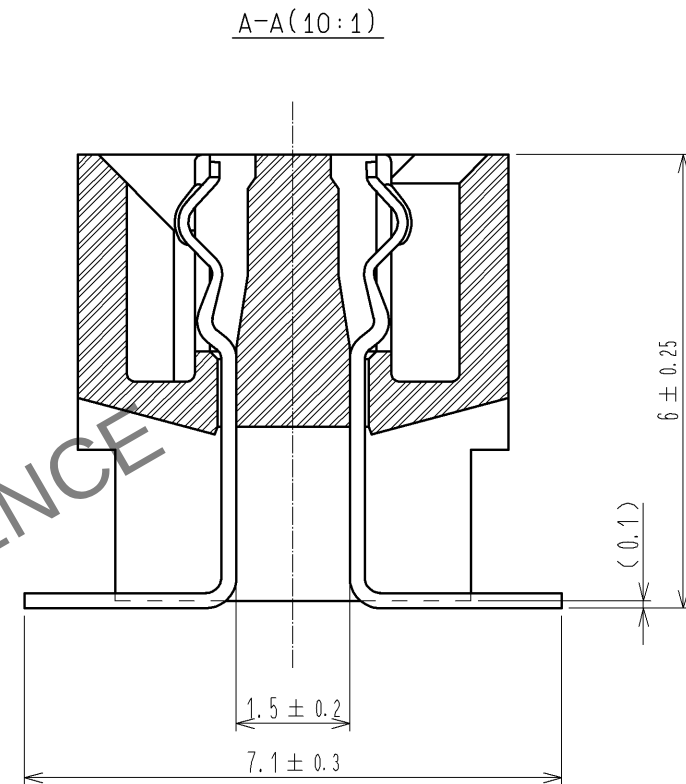


RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(METAL MASK THICKNESS: t=0.15)

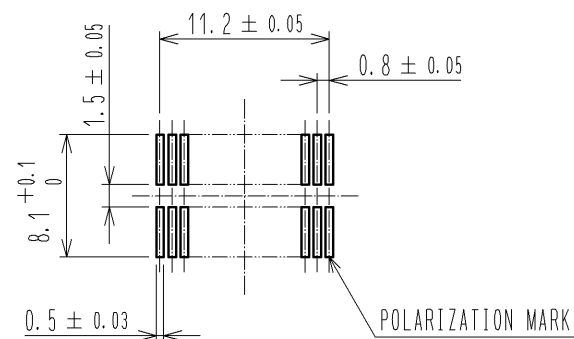

- NOTE
- 1 HRS MARK SHALL BE OPTIONAL.
 - 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 - 3 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED TO THIS PRODUCT. SEE NEXT PAGE FOR DETAILS.
 - 4 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP. SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.
 - 5 FOR MODIFICATION, ETC. PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 7 1 REEL : 1000 CONNECTORS.
 - 8 REMOVE THE VACUUM PICKUP TAPE AFTER MOUNTING THE CONNECTOR.

2PHOSPHOR BRONZE		CONTACT AREA:GOLD 0.1μm min.		5POLYIMIDE		(TAPE FOR VACUUM PICKUP)										
		LEAD AREA:TIN-PLATING 1μm min.		4POLYESTER		(COVER TAPE)										
		UNDER PLATING:NICKEL 2μm min.		3POLYSTYRENE		(EMBOSSED CARRIER TAPE)										
1PPS		LIGHT BROWN (UL94V-0)		3												
NO. MATERIAL		FINISH . REMARKS		NO. MATERIAL		FINISH . REMARKS										
UNITS mm				SCALE 2 : 1				COUNT	DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE	
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		13.08.28		DRAWING NO.		EDC3-156320-02								
		CHECKED : HT. YAMAGUCHI		13.08.27		PART NO.		FX6A-30S-0.8SV2(93)								
		DESIGNED : TH. SANO		13.08.27		CODE NO.		CL576-0322-7-93								
		DRAWN : TH. SANO		13.08.27				 1/2								

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

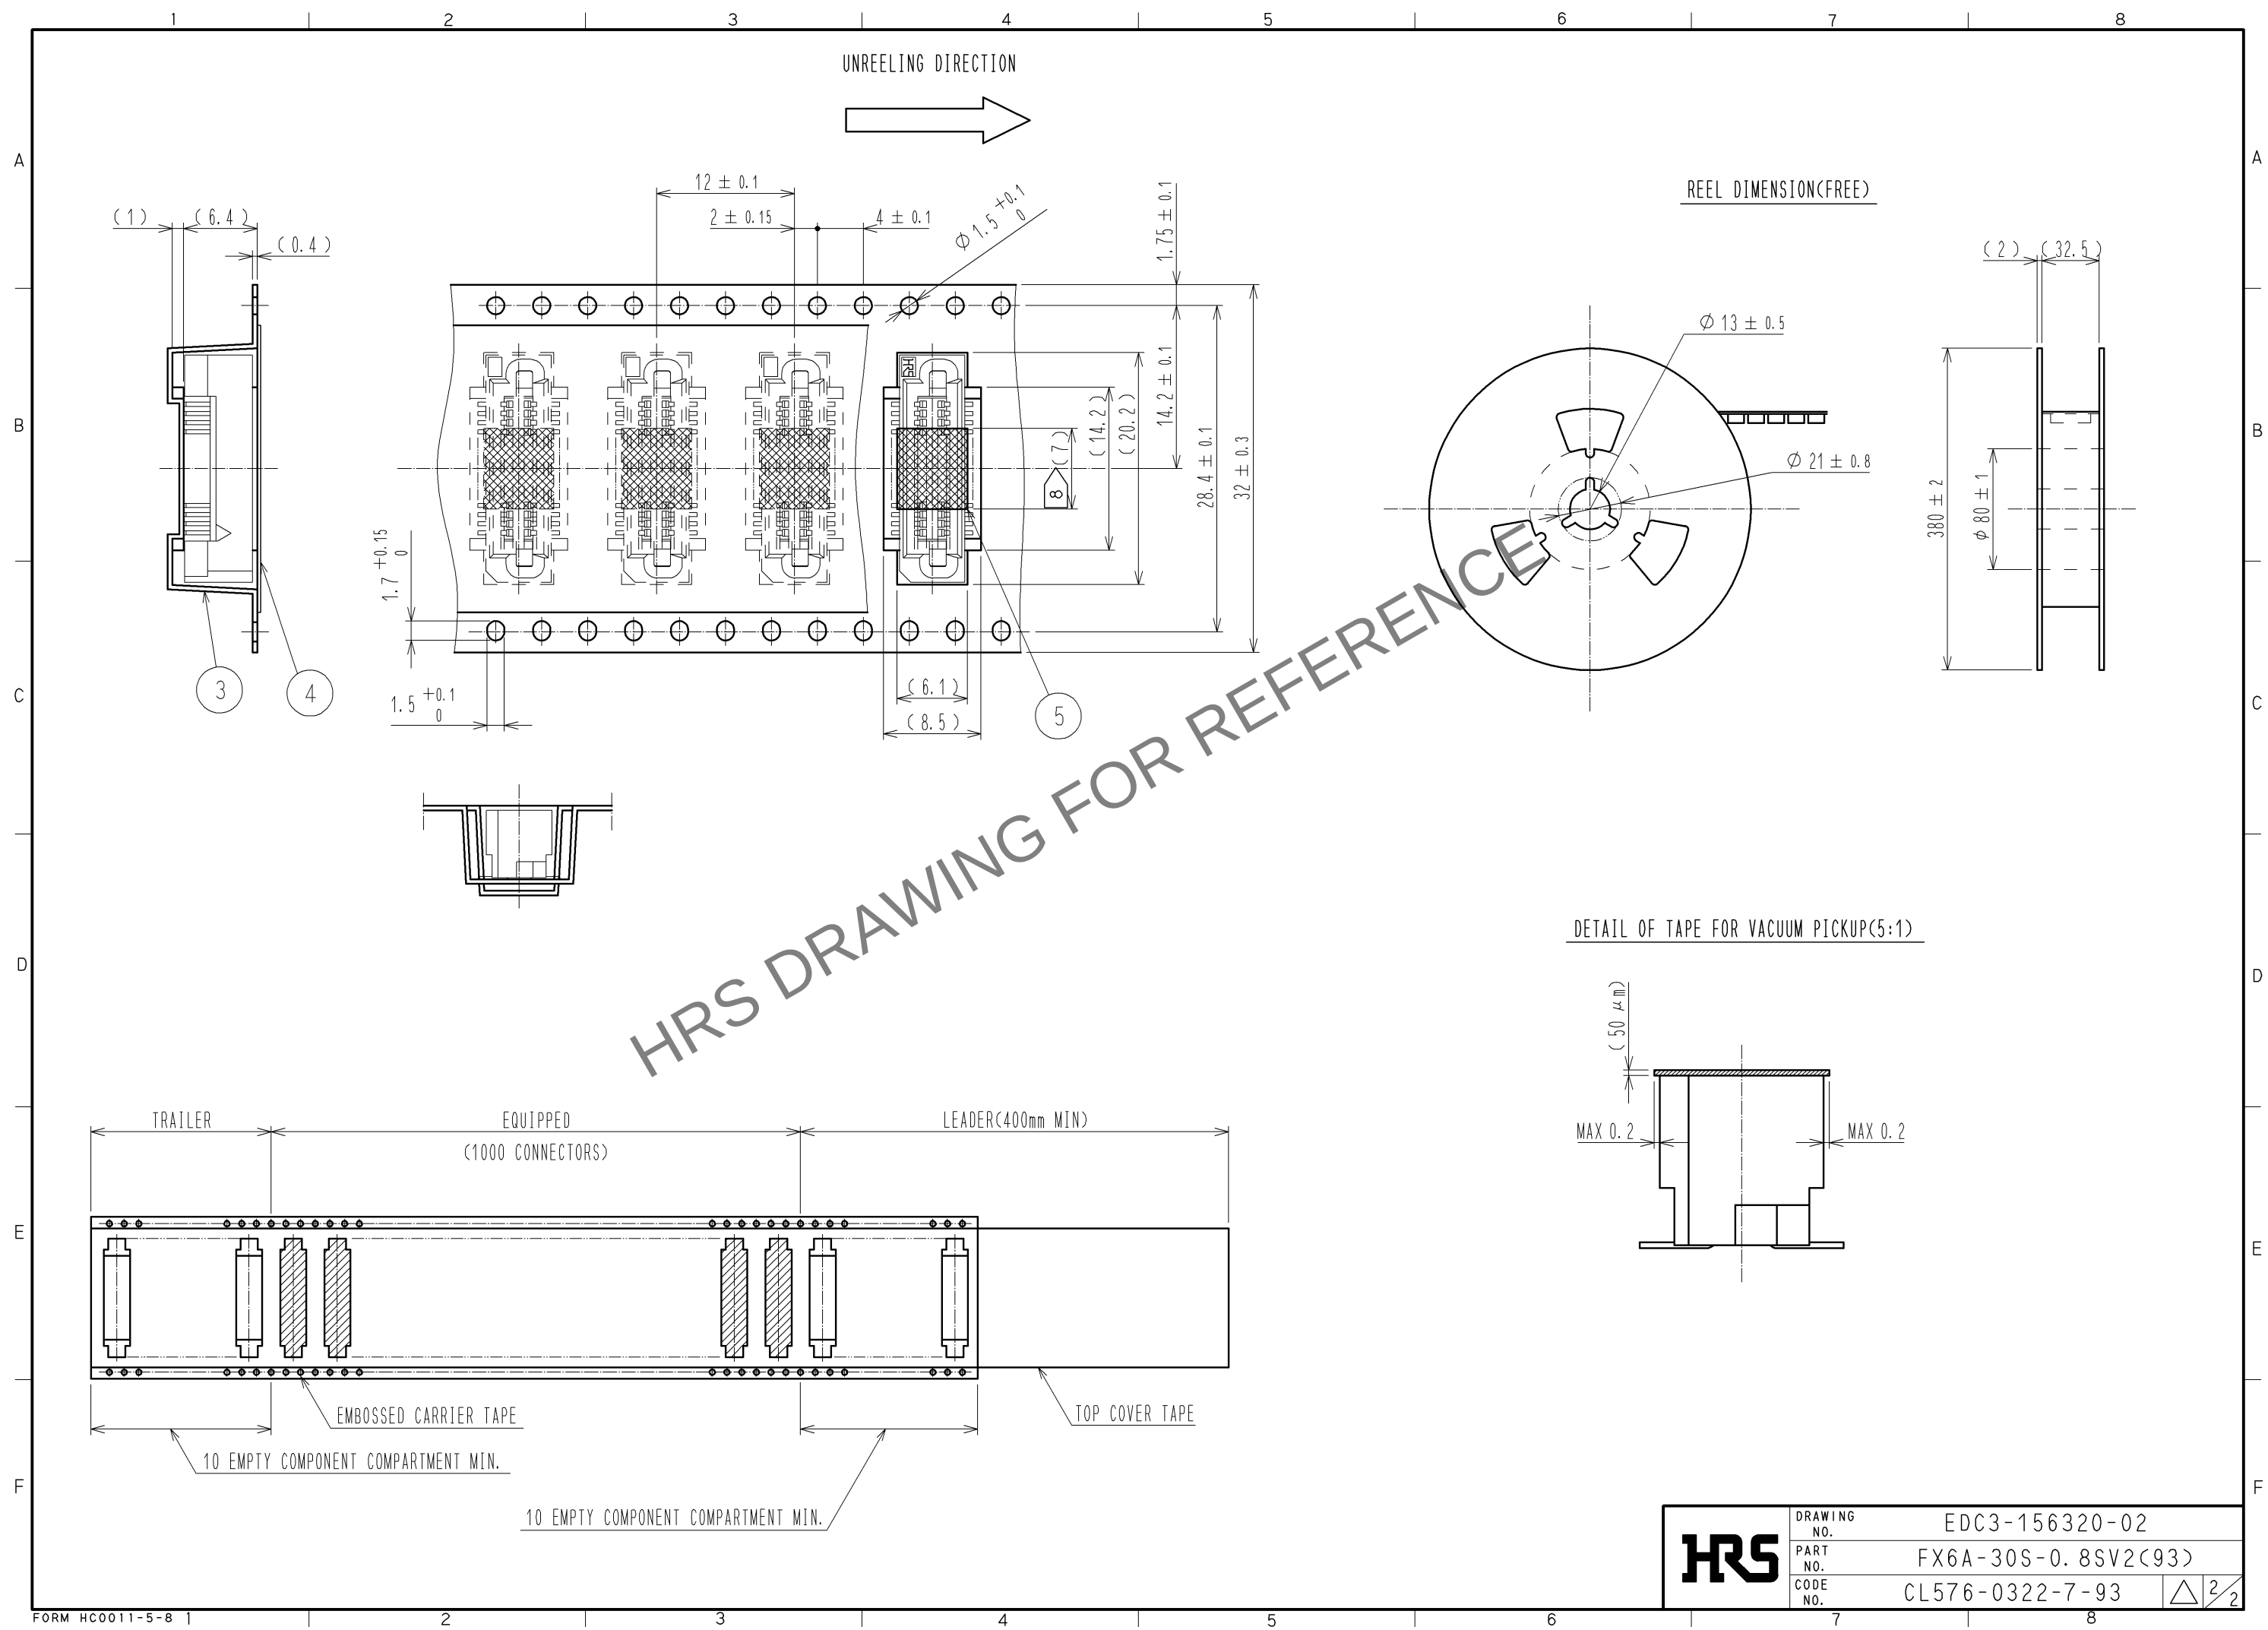

HRS	DRAWING NO.	EDC3-156320-02	
	PART NO.	FX6A-30S-0.8SV2(93)	
	CODE NO.	CL576-0322-7-93	△ 2/2