

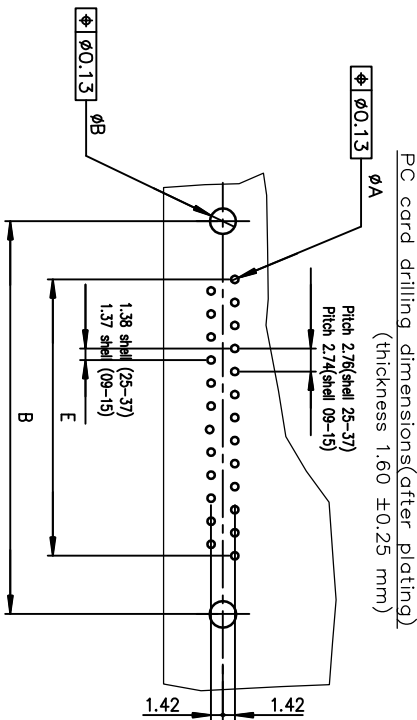
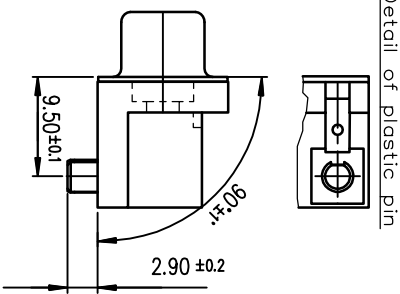
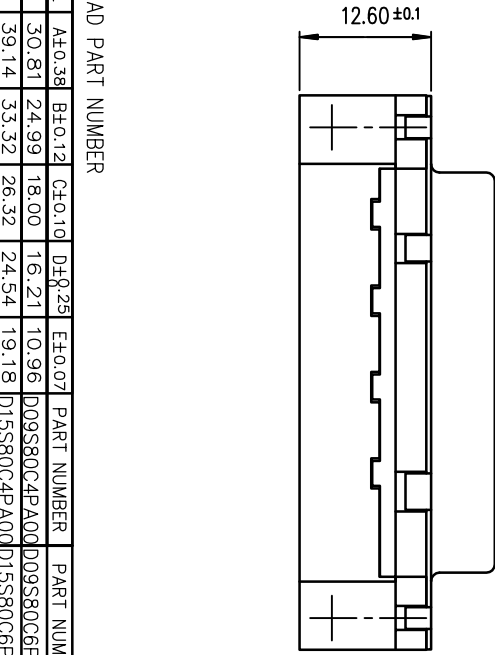
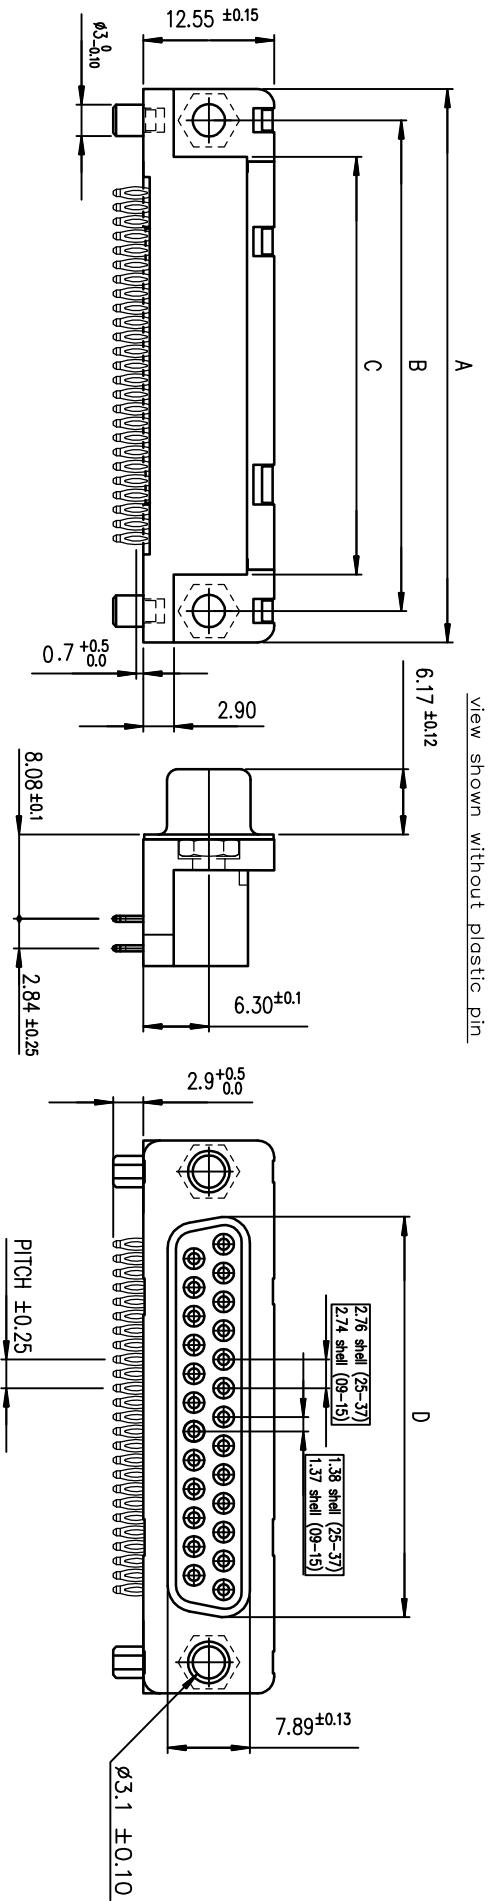
TIN LEAD PART NUMBER	Sn	Pb	Ag	Cu	Fe	Al	Si	Part Number	Part Number
SHELL	40.38	50.12	0.10	0.25	0.07				
09	30.81	24.99	18.00	16.21	10.96			D09S800CAPA00	D09S8006PA00
15	39.14	37.02	26.32	24.54	19.18			D15S800CAPA00	D15S8006PA00
25	53.03	47.04	40.04	38.25	33.12			D25S800CAPA00	D25S8006PA00
37	69.32	63.50	56.50	54.71	49.68			D37S800CAPA00	D37S8006PA00

Gold flash	0,76 » gold
------------	-------------

TIN LEAD PART NUMBER



LEAD FREE PART NUMBER							
SHELL	A40.38	B40.12	C40.10	D40.25	E40.07	PART NUMBER	PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S800C4P.A00LF	D09S800C6P.A00LF
15	39.14	37.02	26.32	24.54	19.18	D15S800C4P.A00LF	D15S800C6P.A00LF
25	53.03	47.34	40.04	38.25	33.12	D25S800C4P.A00LF	D25S800C6P.A00LF
37	69.32	63.50	56.50	54.71	49.68	D37S800C4P.A00LF	D37S800C6P.A00LF

Gold flash	0,76 » gold
------------	-------------



GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0001

mat'l. code		surface		tolerance		projection		product family	
-		150 1302		150 406 150 1101				D-SUB	
ltr	ecn no	dr	date	tolerances unless otherwise specified				title	
G	ELK-17859	MP	2014/06/06	angles	linear	± 0.1 ± 0.1 ± 0.1		FEMALE CONNECTOR DELTA-D US RIGHT ANGLED PRESS FIT	
				$\pm 0.2^\circ$		± 0.1 ± 0.1 ± 0.1		dwg no	
						± 0.1 ± 0.1 ± 0.1		sheet 1 of 1	
						± 0.1 ± 0.1 ± 0.1		size	
						± 0.1 ± 0.1 ± 0.1		A3	
						± 0.1 ± 0.1 ± 0.1		type	
						± 0.1 ± 0.1 ± 0.1		Product Customer Drawing	
sheet	revision	G							
index	sheet	1							