

This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

REV	DESCRIPTION OF REVISION	ECN NO.	BY	DATE	APPROVED
A	Initial Release	—	H.wei	19/03/17	19/03/17

1 Electrical data


- 1.1 Impedance: $50\ \Omega$
- 1.2 Frequency: DC-18GHz
- 1.3 VSWR 1.25:1

2 Mechanical data

- 2.1 Temperature range $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 2.2 Durability(matings) >500

3 Material&Finish

- 3.1 Contact: Brass, gold plated
- 3.2 Body: Brass, Suco-plated
- 3.3 Insulators: PTFE
- 3.4 Cupling Nut: Brass, Suco-plated

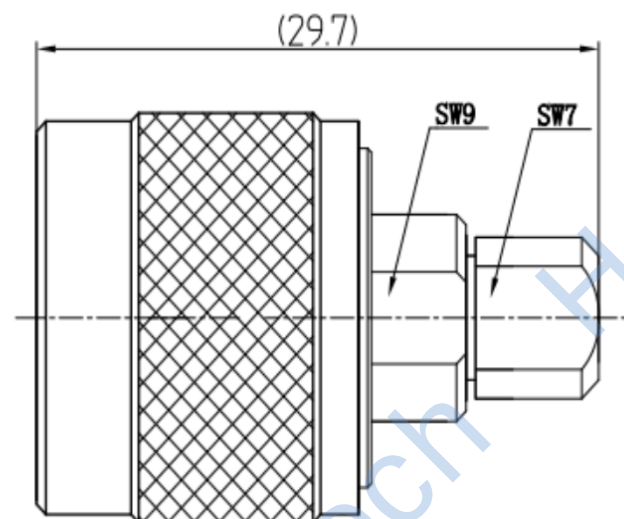

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ± 0.50
.X ± 0.20
.XX ± 0.10
ANGLES $\pm 1^{\circ}$

TITLE:
RF Coaxial Connector
N Male Straight
Connector for 141
Cable Clamp Type

PART NO: HL-N-JB141A



DIMENSION IN MILLIMETERS (mm)

SIZE: A4	SCALE: N/A	SHEET: 1/1	REV: A
----------	------------	------------	--------