
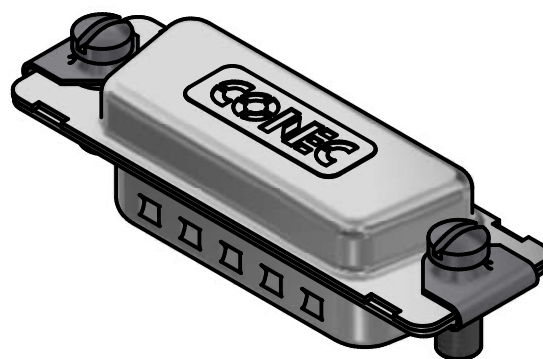
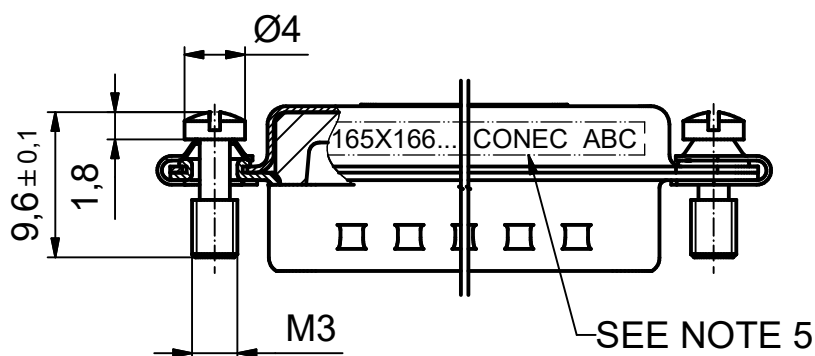
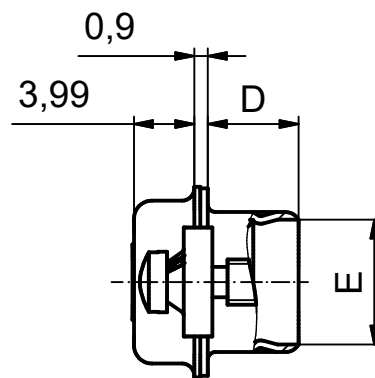


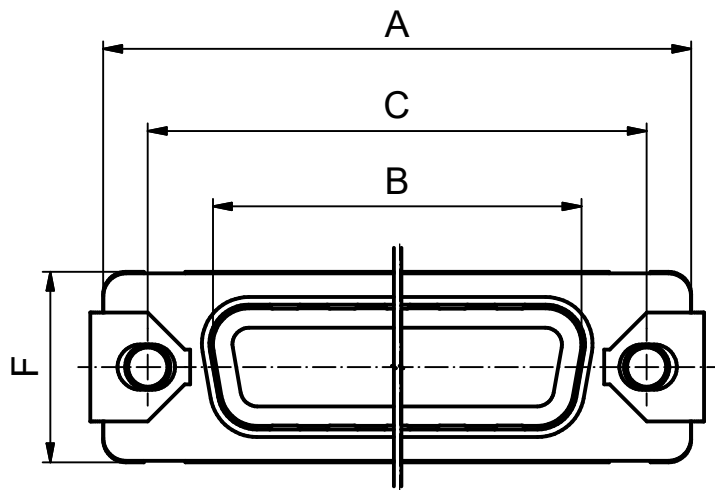

NOTES:

1. METAL SHELLS: COPPER ALLOY;
min. 315µm TIN over 40-80µm NICKEL
2. INSULATOR: TPE
3. CLAMPS: STAINLESS STEEL
4. SCREW: STAINLESS STEEL
5. CONNECTOR IS PART MARKED: [PART NO. CONEC ABC]

RoHS compliant

No. of pos.	A _{-0,76}	B _{+0,25}	C	D _{-0,3}	E _{+0,25}	F _{-0,76}	Part No.: Bulk package	Part No.: Single package
9	31,19	16,79	25,00 _{+0,12 -0,10}	6,12	8,23	12,93	165X16619X	165X16619XE
15	39,52	25,12	33,30 _{+0,15}	6,12	8,23	12,93	165X16629X	165X16629XE
25	53,42	38,84	47,04 ± 0,13	5,99	8,23	12,93	165X16639X	165X16639XE
37	69,70	55,30	63,50 _{+0,13 -0,11}	5,99	8,23	12,93	165X16649X	165X16649XE
50	67,31	52,68	61,10 _{+0,14 -0,11}	5,99	10,95	15,75	165X16659X	165X16659XE

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance		dim. in mm
1 x b	Ä4033	30.06.2011	K.H.	date	name	
a	Original			drawn 28.02.2011	Henneboel	
rev.	description	date	name	appd. 28.02.2011	Fischer	
				norm		
				d-old		

CONEC®

scale:	2:1	
material:	SEE NOTES	
title:	HOOD 9 - 50pos. FOR SOCKET CONNECTOR water resistant, shielded for EMI/RFI	
dwg no:	16K1A2790	DIN-A4
part no:	SEE TABLE	sh: 1