
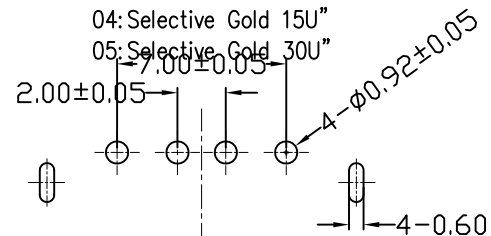
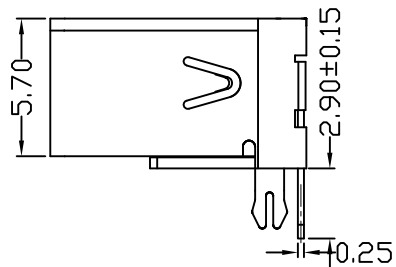
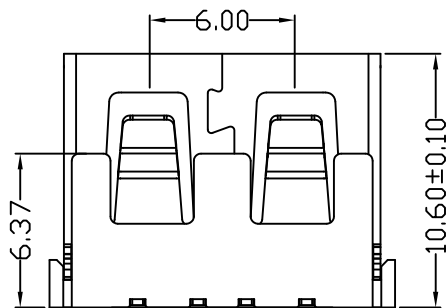
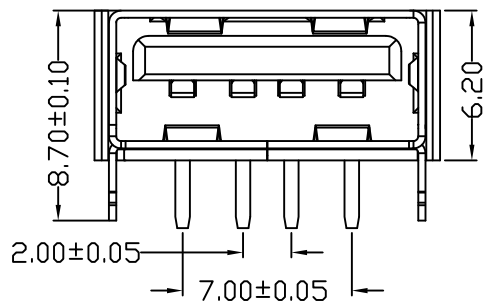


1	2	3	4
D款, 正向10.6四脚, DIP-*6.20			

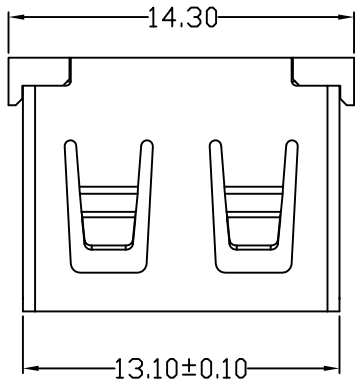

NOTES:

```
1.HOUSING:  SEE NOTES,
  TERMINAL:  SEE NOTES.
  SHELL:     SEE NOTES.
```

SPECIFICATION:

1.ELECTRICAL CHARACTERISTIC:

CONTACT RESISTANCE: 30mΩ MAX

DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN

INSULATION RESISTANCE: 1000MΩ MIN

2.MECHANICAL CHARACTERISTIC:

INSERTION FORCE: 35N(3.57KGF) MAX

EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN

DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N

5000 CYCLES MIN

5000 CYCLES EXTRACTION

FORCE: 3~35N

3.ENVIRONMENTAL:

OPERATING TEMPERATURE: $-55^{\circ}\text{C}+85^{\circ}\text{C}$

4.Contact finish:

01: Selective Gold Flash

02: Selective Gold 3U"

0.3: Selective Gold 5U"

04: Selective Gold 1511"

05: Selective Gold 30U"

05: Selective Gold
7.00±0.05

 $2.00 \pm 0.05 \rightarrow$

→ | | ← 4-0.60

FRONT EDGE OF CONNECTOR

PCB LAYOUT (T=1.60mm)



深圳市精拓金电子有限公司