

Electrical Specifications @ 25°C - Operating Temperature -40°C to +85°C, Storage Temperature - 55 °C to 125 °C

Notes:
* Tested and specified at 25°C +/- 10°C

Schematic


Pulse
HX6106NL
DATE CODE CTRY OF MFG

PIN 1
IDENTIFICATION
24X .020±.050

11X .050(=.550)

24 SURFACES
△.0004

Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$

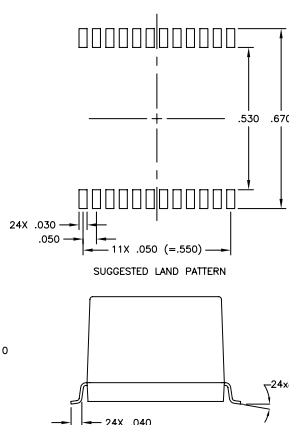

CHIP SIDE


Td $\longleftrightarrow$ Mx

Td $\longleftrightarrow$ Mx

Td $\longleftrightarrow$ Mx

Td $\longleftrightarrow$ Mx

MEDIA SIDE

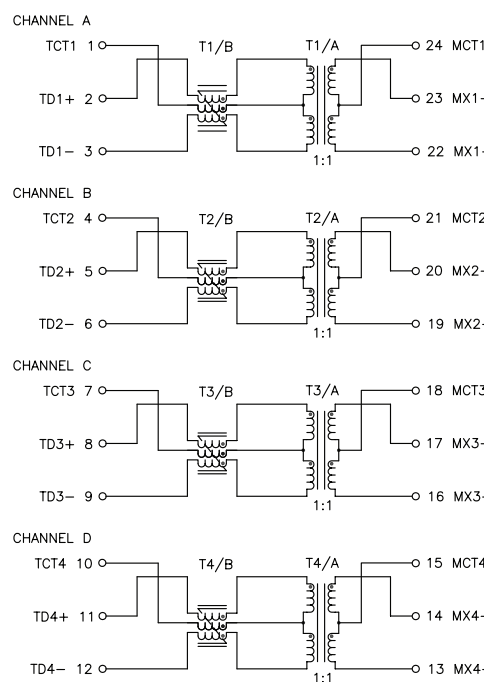

**Pulse Worldwide
Headquarters**
12220 World Trade Drive
San Diego, CA 92128
U.S.A.

Pulse Europe
Zeppelinstrasse 15
D-71083 Herrenberg
Germany

Pulse China Headquarters
B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057
Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China
Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Pulse South Asia
135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia
3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

1

H607.A (11/12)