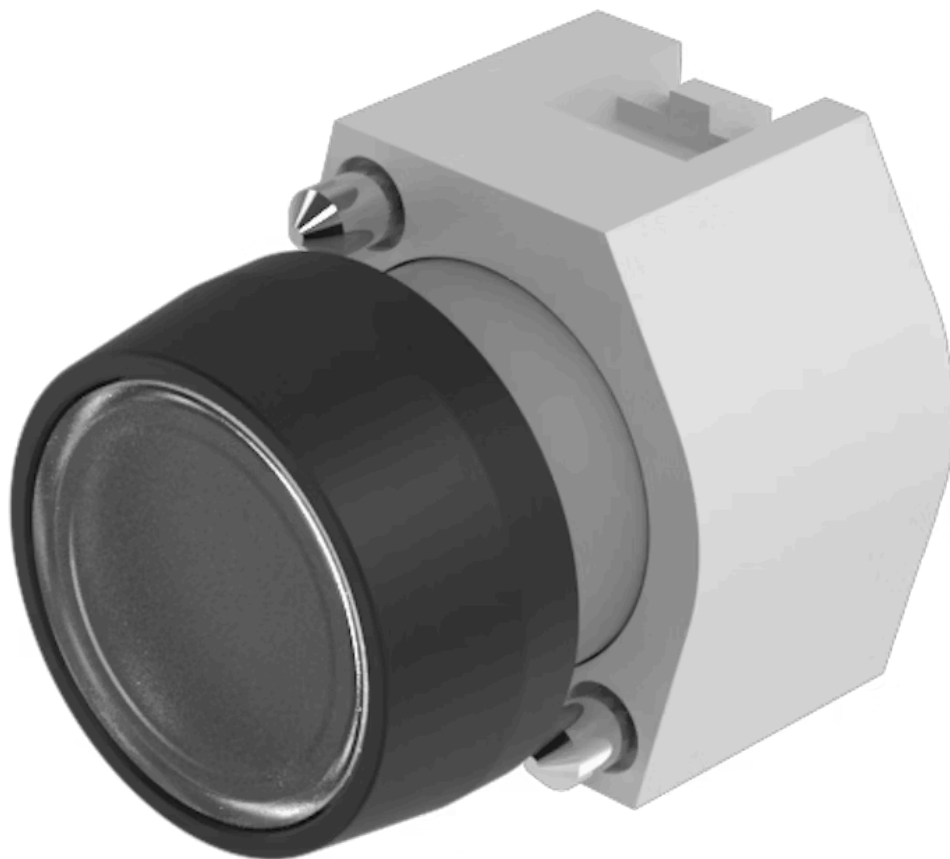


# Actuator

704.009.7

Distribution by  
DigiKey**DigiKey**<https://digikey.eao.com/p/704.009.7>

Your product:

---



## 704.009.7 Actuator

### FRONT

|                       |         |
|-----------------------|---------|
| Front dimension:      | Ø 29 mm |
| Front form:           | round   |
| Front bezel material: | Plastic |
| Front bezel colour:   | Black   |

### MOUNTING

|         |        |
|---------|--------|
| Design: | raised |
|---------|--------|

### OPERATING-/INDICATION PART

|                    |                  |
|--------------------|------------------|
| Lens shape:        | flush            |
| Lens illumination: | non illuminative |
| Lens material:     | Plastic          |
| Lens optics:       | transparent      |
| Lens colour:       | Colourless       |

### ELECTRICAL CHARACTERISTICS

|            |                                                                                           |
|------------|-------------------------------------------------------------------------------------------|
| Standards: | The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1 |
|------------|-------------------------------------------------------------------------------------------|

### MECHANICAL CHARACTERISTIC

|                   |                     |
|-------------------|---------------------|
| Weight:           | 0.04 kg             |
| Operating Travel: | ca. 5.8 mm ± 0.2 mm |
| Operating force:  | 8 N                 |

**Switching action:** Momentary

**Mechanical lifetime:** ≤3 Mio. cycles of operation

## AMBIENT CONDITION

**Operating temperature:** – 40 °C ... + 55 °C

**Storage temperature:** – 40 °C ... + 85 °C

**IP Protection:** IP65 front side

## OTHER

**max. number of switching elements:** 3


**Housing colour:** Grey

**Housing material:** Plastic


**Hints:** Frontring with protective cover to be mounted with a torque of 0.4 Nm onto actuator, Max. 3 switching elements can be clipped on

**Short Description:** Actuator, Ø 29 mm, flush, non illuminative, Colourless, Plastic, transparent, round, Black, Plastic, Momentary

**Wiring diagrams:**

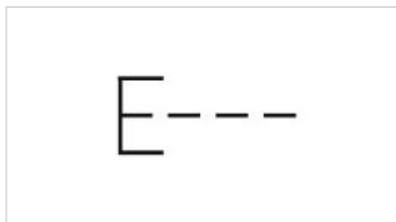


## Dimension drawings:

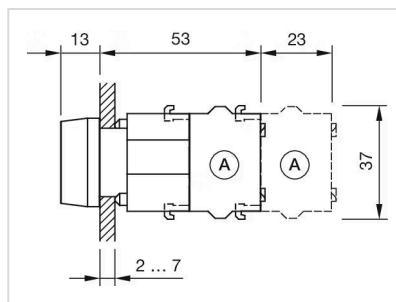

A = Screw terminal

## Mounting cut-outs:

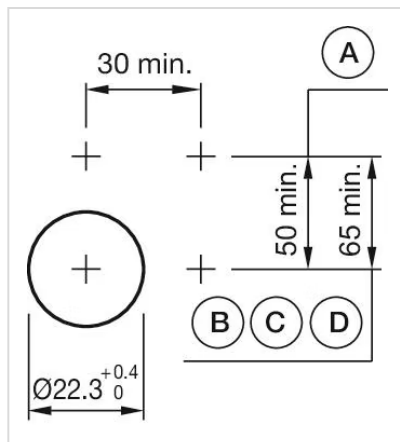

- A = Screw terminal
- B = Push-in terminal (PIT)
- C = Plug-in terminal 6.3 mm x 0.8 mm
- D = Double plug-in terminal 6.3 mm x 0.8 mm