


TO





A
B
C
D
E
F

1 2 3 4 5 6 7 8

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

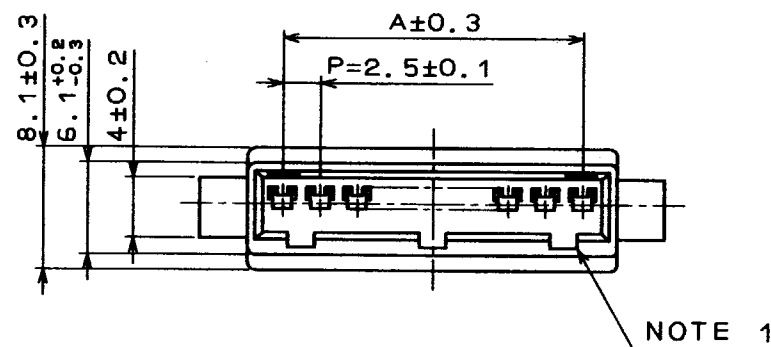

< PANEL CUT-OUT >

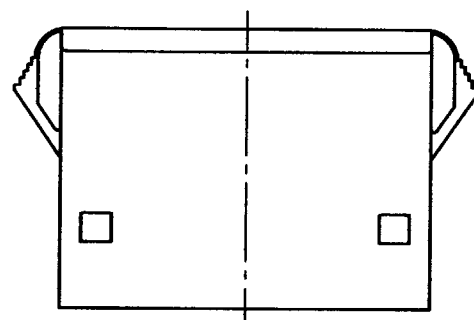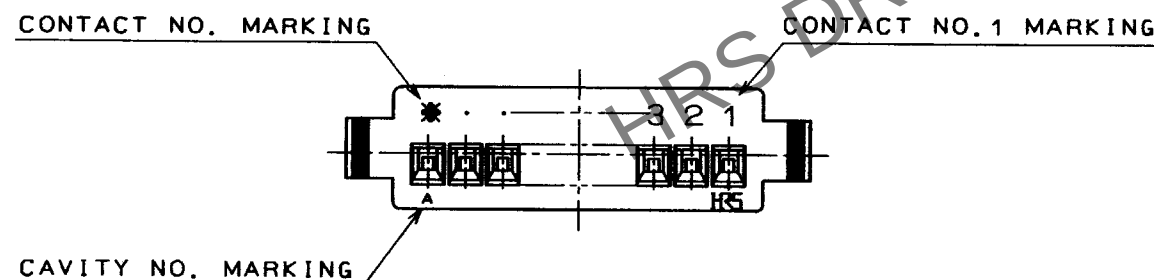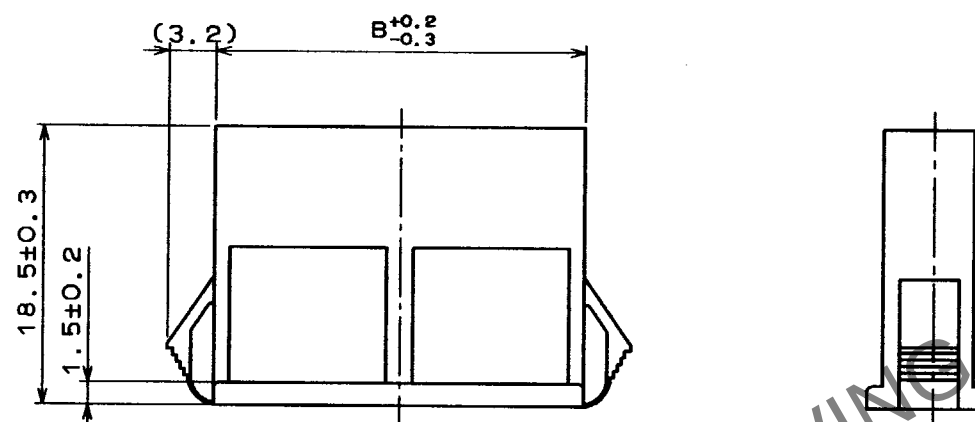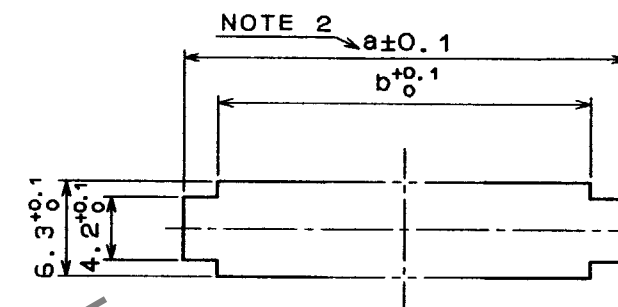

CL No.		PART No.		A	B	PANEL CUT-OUT			
						PANEL THICKNESS		a	b
						0.5-1.2	1.3-1.6		
CL541-0700-9		DF1BA- 2EP-2.5RC		2.5	7.1	11.2	11.9	12.6	7.3
CL541-0701-1		DF1BA- 3EP-2.5RC		5.0	9.6	13.7	14.4	15.1	9.8
CL541-0702-4		DF1BA- 4EP-2.5RC		7.5	12.1	16.2	16.9	17.6	12.3
CL541-0703-7		DF1BA- 5EP-2.5RC		10.0	14.6	18.7	19.4	20.1	14.8
CL541-0704-0		DF1BA- 6EP-2.5RC		12.5	17.1	21.2	21.9	22.6	17.3
CL541-0705-2		DF1BA- 7EP-2.5RC		15.0	19.6	23.7	24.4	25.1	19.8
CL541-0706-5		DF1BA- 8EP-2.5RC		17.5	22.1	26.2	26.9	27.6	22.3
CL541-0707-8		DF1BA- 9EP-2.5RC		20.0	24.6	28.7	29.4	30.1	24.8
CL541-0708-0		DF1BA-10EP-2.5RC		22.5	27.1	31.2	31.9	32.6	27.3
CL541-0709-3		DF1BA-11EP-2.5RC		25.0	29.6	33.7	34.4	35.1	29.8
CL541-0710-2		DF1BA-12EP-2.5RC		27.5	32.1	36.2	36.9	37.6	32.3
CL541-0711-5		DF1BA-13EP-2.5RC		30.0	34.6	38.7	39.4	40.1	34.8
CL541-0713-0		DF1BA-15EP-2.5RC		35.0	39.6	43.7	44.4	45.1	39.8

NOTES 1: CONCAVE PORTION TO PREVENT CONNECTOR MISINSERTION SHALL BE APPLIED ONE AT THE CENTER FOR 2 CONTACTS, TWO AT BOTH ENDS FOR 3 TO 6 CONTACTS AND 3 FOR ANOTHER NUMBER OF CONTACT AS THE FIGURE SHOWN.

2: WHEN YOU MOUNT DF1BA RELAY SOCKET ON A PANEL, PLEASE TAKE NOTE OF DIMENSIONS 'a', INDICATED IN THE TABLE ABOVE. BECAUSE THE CUT-OUT DIMENSION DEPENDS ON PANEL THICKNESS.
THE PANEL CUT-OUT SHALL BE FREE FROM BURR.

1		POLYAMIDE		NATURAL (WHITE) UL94V-0					
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS			
CODE NO. (OLD)		DRAWN		DESIGNED	CHECKED	APPROVED	RELEASED		
		R. SASAKI		M. Tanaka	J. Oma	H. Yamamoto			
		951011		95.10.23	95.10.23	95.10.23			
DRAWING NO.		PART NO.							
EDC3-160595		DF1BA- * EP-2.5RC							
SCALE		CODE NO.		CODE NO. SHALL BE IN		1			
2 : 1				ACCORDANCE WITH TABLE.		1			
UNITS		HIROSE ELECTRIC CO., LTD.							
mm									

A
B
C
D
E
F