




CSE U12ET 4P DC MA STR MA STR TPE XM DE UNSH TE :

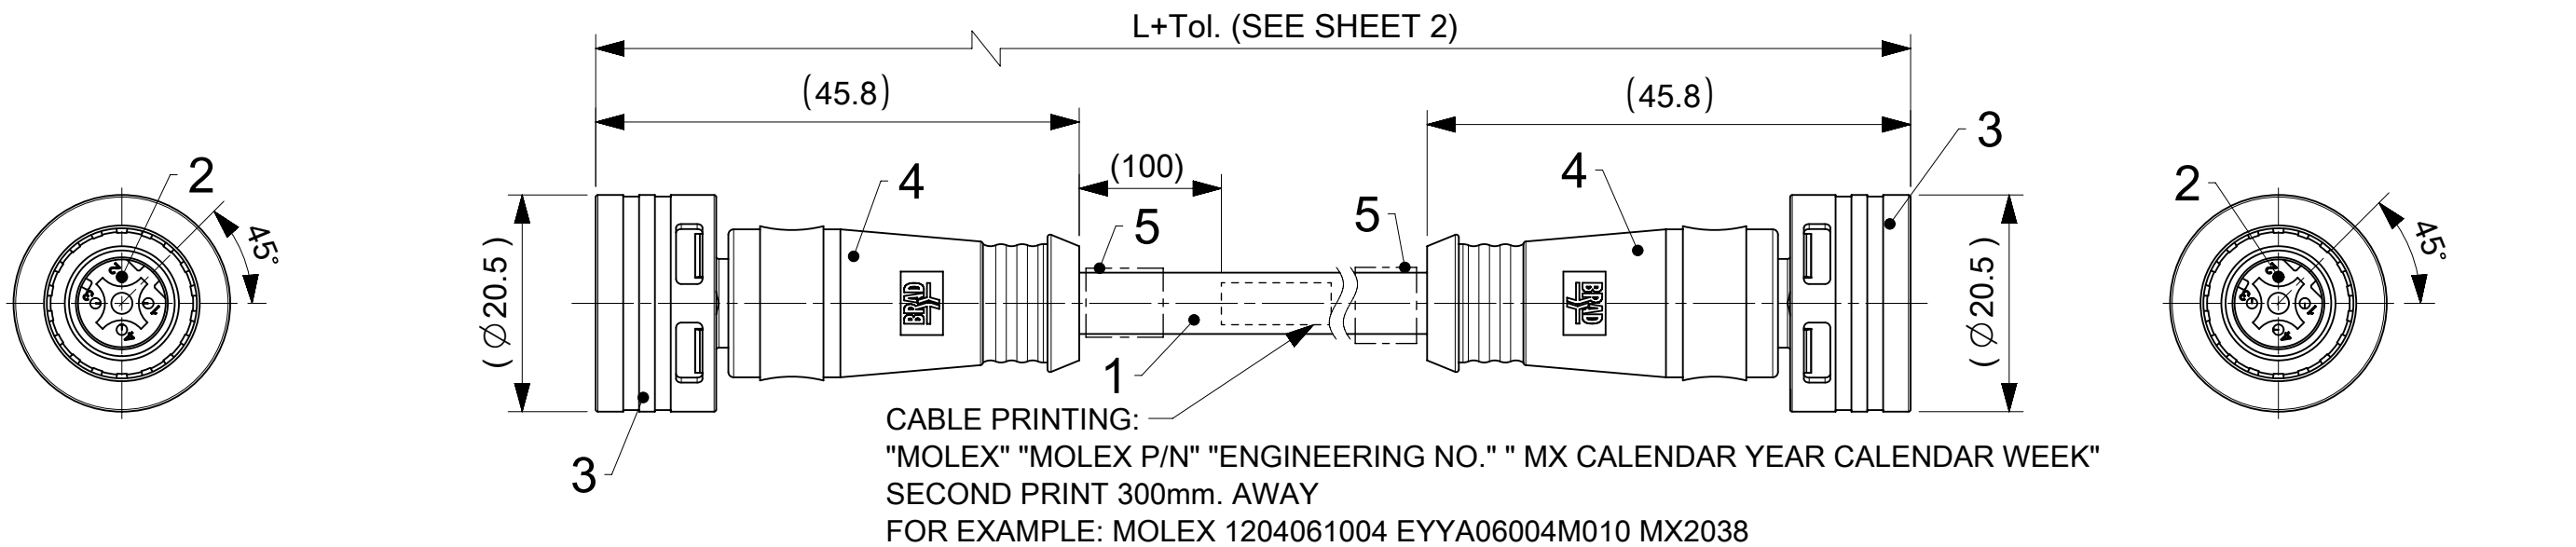

CSE U12ET 4P DC MA STR MA RA TPE XM DE UNSH TE :

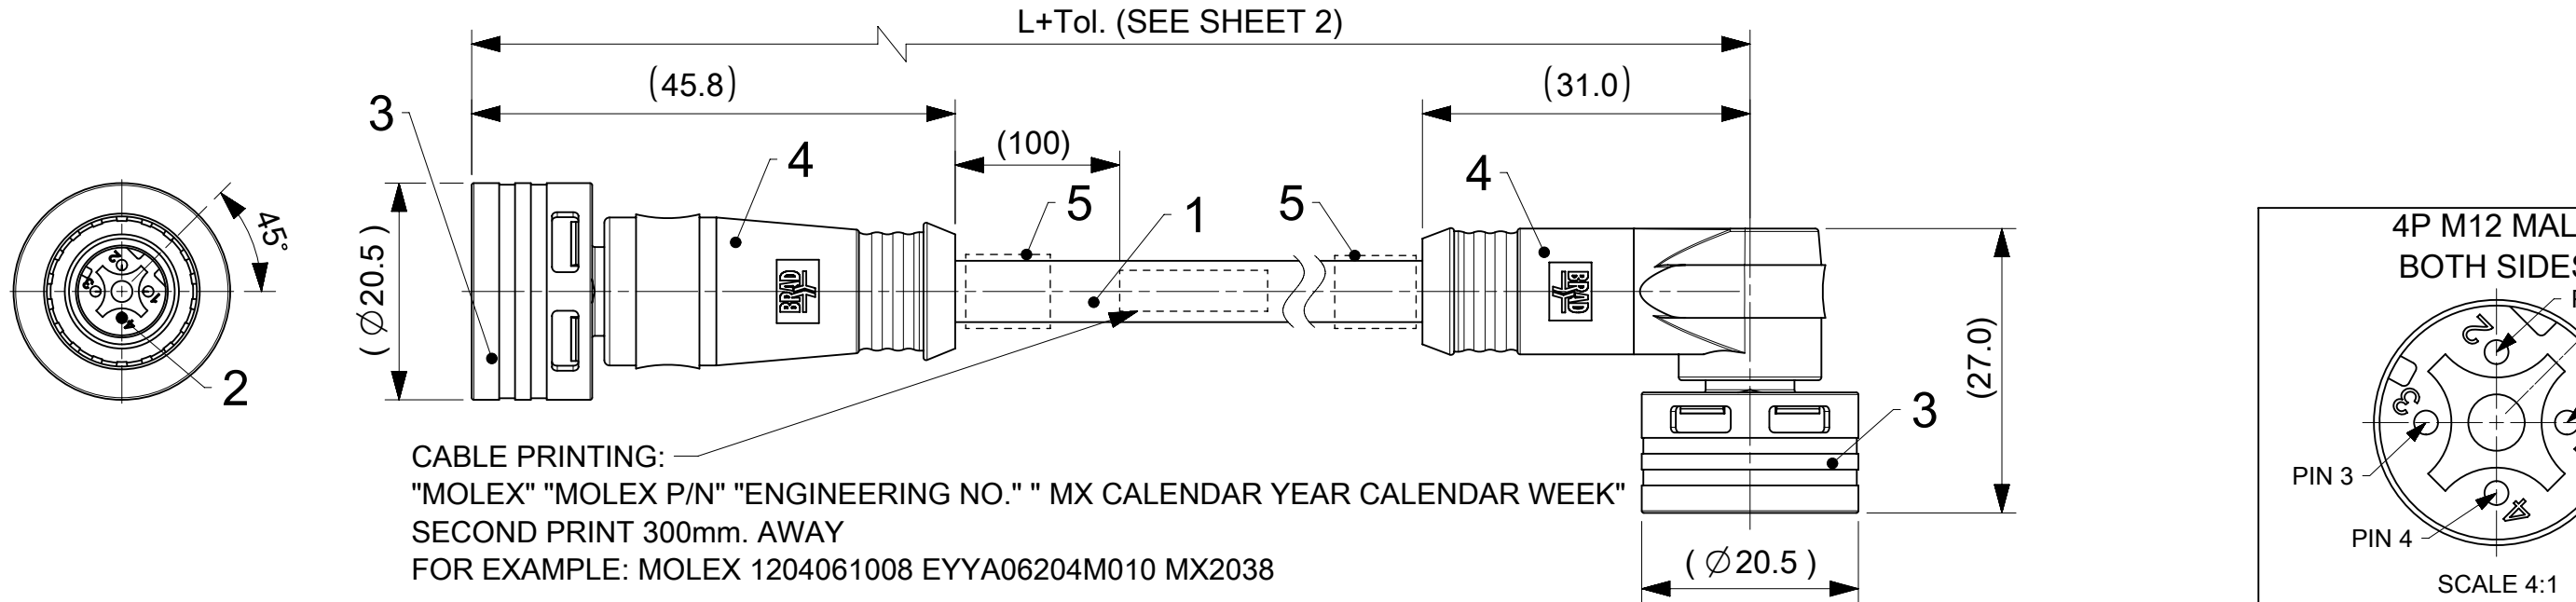

- NOTES:
1. PARTS ACC. TO PRODUCT SPECIFICATION 1204000001 PS P10 AND IN STYLE OF IEC-61076-2-010
 2. BOM & PART LIST - SEE SHEET 2
 3. ELECTRICAL DATA: ACCORDING TO CAT5e ETHERNET STANDARD
RATED VOLTAGE: 60V DC
RATED CURRENT: 1.5A, DERATING HAS TO BE CONSIDERED
OVERVOLTAGE CATEGORY: 3
POLLUTION DEGREE: 3, ONLY IN MATED AND LOCKED CONDITION
TRANSMISSION CHARACTERISTICS ACCORDING TO ISO/IEC 11801 CAT 5e PATCH CORD PROFINET TYPE C
 4. PROTECTION CLASS: IP 67, ONLY IN MATED AND LOCKED CONDITION
 5. TEMPERATURE RANGE:
TEMPERATURE PLUG/SOCKET: -40 °C TO +85 °C
TEMPERATURE CABLE: SEE CABLE LIST
 6. MECHANICAL OPERATIONS: 100 CYCLES
 7. MATES WITH ULTRA-LOCK M12 FEMALE RECEPTACLES
 8. PACKAGING: THE CORDSETS ARE SINGLE PACKED IN PLASTIC BAGS AND DELIVERED IN CARTON BOXES
 9. UL CSA FILE REGISTRATION PENDING

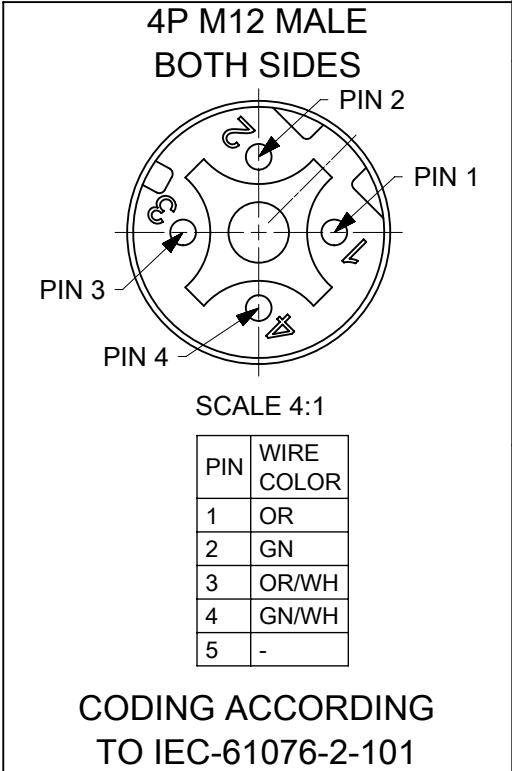



PIN	WIRE COLOR
1	OR
2	GN
3	OR/WH
4	GN/WH
5	-

CODING ACCORDING TO IEC-61076-2-101

FUNCTIONAL SYMBOLS 0 0 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: NOTES AND CABLE LIST UPDATED	
	DIMENSION UNITS	SCALE	EC NO: 736602	
	mm	1.5:1	DRWN: RSCHIEBER	
	GENERAL TOLERANCES (UNLESS SPECIFIED)		2023/01/27	
DIVISIONAL SYMBOLS	ANGULAR TOL ± 1.0 °		CHK'D: RSILLER	
	4 PLACES ±		APPR: RSILLER	
	3 PLACES ±		2023/01/31	
	2 PLACES ± 0.05		INITIAL REVISION:	
	1 PLACE ± 0.3		DRWN: JELIZAINCIN	
	0 PLACES ± 0.5		APPR: RSILLER	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		2021/04/21	
	THIRD ANGLE PROJECTION		2022/10/14	
DRAWING		SERIES	DOCUMENT NUMBER	
A3-SIZE		120406	1204061004	
MATERIAL NUMBER		CUSTOMER	PSD	
SEE SHEET 2		GENERAL MARKET	000	
SHEET NUMBER		1 OF 2	A1	

DOCUMENT STATUS	P1	RELEASE DATE	2023/01/31	08:21:28
-----------------	----	--------------	------------	----------

CSE U12ET 4P DC MA RA MA RA TPE XM DE UNSH TE :

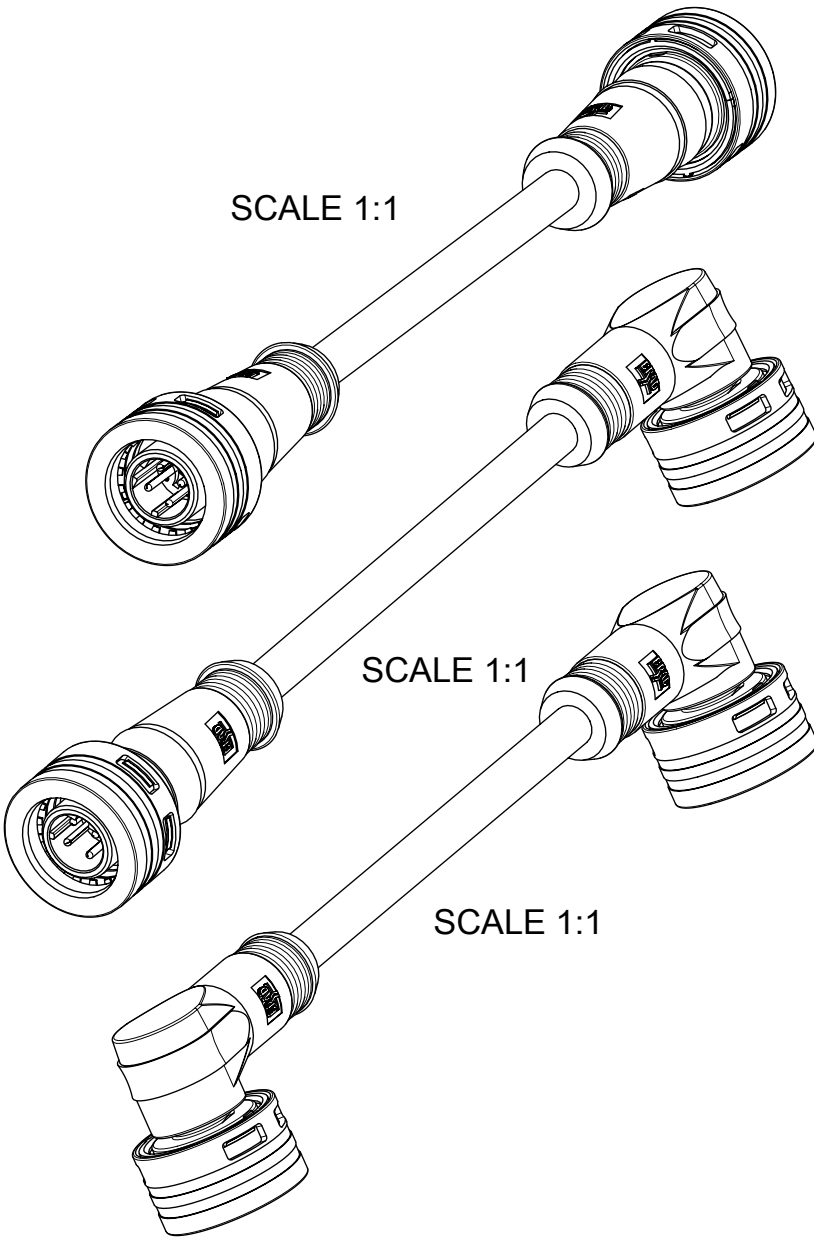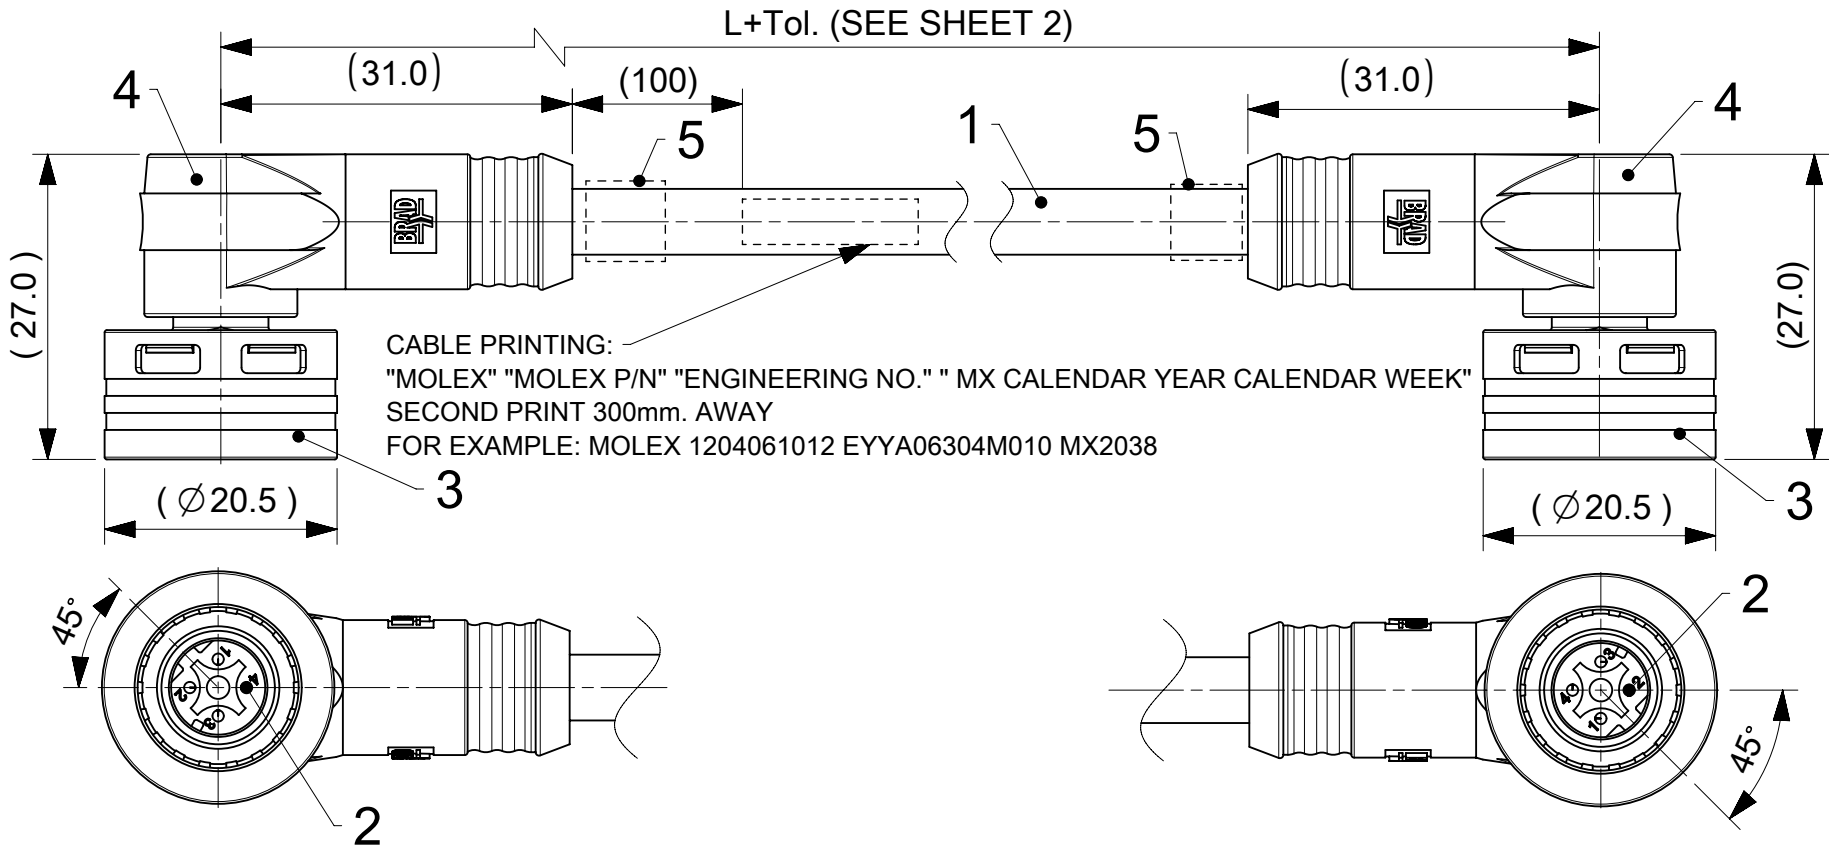

PART No MATRIX

E	Y	Y	A	X	X	X	X	X	X	X	X	X	X
EYY=ETHERNET ULTRA LOCK 2.0 4 POLE D-CODE DOUBLE ENDED			WIRING: A = 4POLE STRAIGHT WIRED	HEADER : 060 = MALE STRAIGHT - MALE STRAIGHT 062 = MALE STRAIGHT - MALE RIGHT ANGLE 063 = MALE RIGHT ANGLE - MALE RIGHT ANGLE			CABLE: 04 - ETHERNET CAT-5E 2x2x24AWG TPE TEAL		UNIT: M = METER F = FEET C = CENTIMETER T = 10M		LENGTH: EXAMPLE: 010 = 1 m 050 = 5 m 100 = 10 m		OVERMOLD: BLANK = A = GREY E = RED G = BLACK Y = YELLOW H = STD. COLOUR ID-TAG CARRIERS

CABLE LIST

4P	CABLE TYPE	DESCRIPTION	MATERIAL	FINISH/COLOR	FIXED INSTALLATION *		FLEXIBLE INSTALLATION **		DRAG CHAIN	
					MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
X	04	CABLE ETHERNET CAT-5E TPE TEAL 2X2X24AWG D6.5	TPE	TEAL	-20°C	+75°C	-5°C	+75°C	-	-

* FIXED POSITION WITHOUT ACCIDENTAL CRUSHING OF VIBRATION.
** FREE MOTION WITHOUT PERIODIC RECURRENCE OR FORCED GUIDANCE.

BILL OF MATERIAL

MA STR	MA STR	MA RA	ITEM	QTY	DESCRIPTION	MATERIAL	FINISH/COLOR
-MA STR	-MA RA	-MA RA					
X	X	X	1	-	CABLE	SEE CABLE LIST	SEE CABLE LIST
X	X	X	2	8	CONTACT 10 MA STA NI	COPPER ALLOY	GOLD OVER NICKEL PLATED
X	X	X	3	2	PLG U12 4P DC MA PA UNSH WT	-	-
X	X	X	4	2	OVERMOLD	TPC	SEE MATRIX
IF "H" IS IN MATRIX-END			5	2	I/D CARRIER DIA 4-7MMX30MM	PVC	TRANSPARENT

DOCUMENT STATUS P1 RELEASE DATE 2023/01/31 08:21:28

CABLE LENGTH TOLERANCES	
LENGTH	TOLERANCE
0m-1m	+40 mm
>1m-5m	+60 mm
>5m-10m	+80 mm
>10m-20m	+140 mm
>20m-30m	+160 mm
>30m	+1% length

PART LIST

MOLEX NO.	ENGINEERING NO.	LENGHT (mm)
1204061004	EYYA06004M010	1000
1204061005	EYYA06004M020	2000
1204061006	EYYA06004M050	5000
1204061007	EYYA06004M100	10000
1204061008	EYYA06204M010	1000
1204061009	EYYA06204M020	2000
1204061010	EYYA06204M050	5000
1204061011	EYYA06204M100	10000
1204061012	EYYA06304M010	1000
1204061013	EYYA06304M020	2000
1204061014	EYYA06304M050	5000
1204061015	EYYA06304M100	10000

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	DIMENSION UNITS		SCALE		CURRENT REV DESC: NOTES AND CABLE LIST UPDATED			molex		
	mm		1.5:1							
	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 736602 DRWN: RSCHIEBER 2023/01/27 CHK'D: RSILLER 2023/01/31 APPR: RSILLER 2023/01/31 INITIAL REVISION: DRWN: JELIZAINCIN 2021/04/21 APPR: RSILLER 2022/10/14			CSE U12ET 4P DC MA MA TPE XM DE UNSH TE				
	ANGULAR TOL ± 1.0 °									
	4 PLACES ±					PRODUCT CUSTOMER DRAWING				
	3 PLACES ±									
	2 PLACES ± 0.05									
	1 PLACE ± 0.3									
	0 PLACES ± 0.5		DOCUMENT NUMBER			DOC TYPE	DOC PART	REVISION		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING	SERIES	1204061004		PSD	000	A1
				A3-SIZE	120406	MATERIAL NUMBER		CUSTOMER	SHEET NUMBER	
						SEE PART LIST		GENERAL MARKET		2 OF 2