

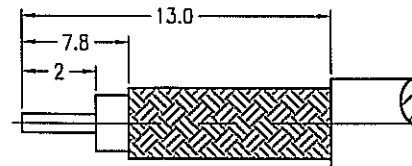


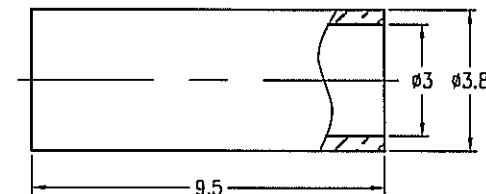
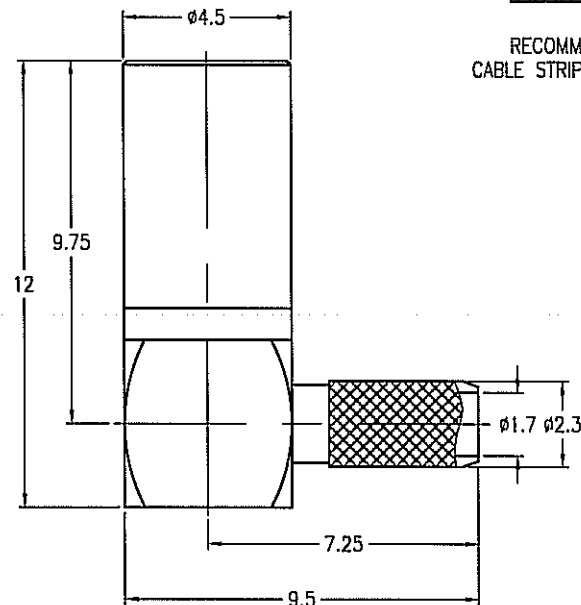
NOTES:

- MATERIALS AND FINISHES
BODY - BERYLLIUM COPPER, GOLD PLATING
CONTACT - BERYLLIUM COPPER, GOLD PLATING
INSULATOR - PTFE
- ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC 0-4 GHz
D. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.
- MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
- CRIMPED FERRULE
HEX CRIMP SIZE .128"
- CONTACT PIN TO SOLDER

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
B	SEE SHEET 1	27-Jan-03	--	TONY
C	REDRAWN TO UPDATE FORMAT	9-4-08	47310	

RECOMMENDED
CABLE STRIPPING DIM'S

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ±0.3mm ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL

REFERENCE

FINISH

DRAWN
RICHERENGINEER
RICHERAPPROVED
TONY

CAD FILE

F:\DWG\SSMB\6112A1\316U-50\3GT30G-CSZ

DATE

08-Feb-03

DATE

08-Feb-03

DATE

08-Feb-03

TITLE

SSMB R/A CRIMP PLUG
(FOR RG-174/U,188A/U,
316/U)

SCALE: 5/1

DWG SIZE

B

SHEET

2 OF 2

CODE ID

74868

REV

C

Amphenol RF

Danbury CT USA, Tainan Taiwan, Shenzhen China
www.amphenolrf.com

DRAWING NO. SSMB6112A1-3GT30G-316U-50

ITEM NO. 156112AAA36GE5F

PART NO. 904-111P-51AX