

https://www.phoenixcontact.com/us/products/1680539



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



An M12 screw plug for the unoccupied M12 sockets of the sensor/actuator cable, boxes and flush-type connectors

### Your advantages

- Reliable protection of unoccupied slots during transport and use in the field
- · Protected against splash water and dust
- · Easy assembly using a screwdriver

### Commercial data

| Item number                          | 1680539             |
|--------------------------------------|---------------------|
| Packing unit                         | 5 pc                |
| Minimum order quantity               | 5 pc                |
| Sales key                            | BF46                |
| Product key                          | BF3ZAX              |
| Catalog page                         | Page 197 (C-6-2019) |
| GTIN                                 | 4017918163389       |
| Weight per piece (including packing) | 2.19 g              |
| Weight per piece (excluding packing) | 0.826 g             |
| Customs tariff number                | 39269097            |
| Country of origin                    | DE                  |



https://www.phoenixcontact.com/us/products/1680539




### Technical data

#### Notes

|                    | Note on application    | Also suitable for M12 push-pull. |
|--------------------|------------------------|----------------------------------|
| Product properties |                        |                                  |
|                    | Product type           | Plug for cable screw gland       |
|                    | Thread type            | M12                              |
| I                  | Data management status |                                  |
|                    | Article revision       | 02                               |
| Со                 | nnection data          |                                  |
|                    | Tightoning torque      | 0.4 Nm                           |

| Tightening torque | 0.4 Nm |
|-------------------|--------|
|-------------------|--------|

#### **Dimensions**

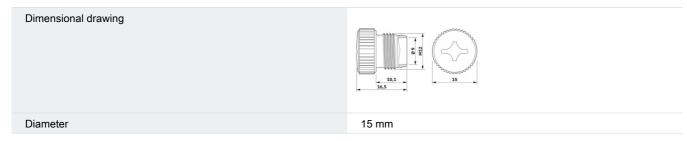

### Material specifications

| Flammability rating according to UL 94 | V0     |
|--|--------|
| Material for screw connection          | PA 6.6 |

#### Environmental and real-life conditions

### Ambient conditions

| Degree of protection            | IP65         |
|---------------------------------|--------------|
|                                 | IP67         |
| Ambient temperature (operation) | -40 °C 85 °C |


1680539

https://www.phoenixcontact.com/us/products/1680539



### Drawings

### Dimensional drawing

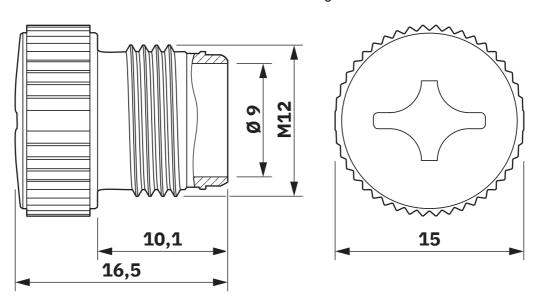



https://www.phoenixcontact.com/us/products/1680539



### **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1680539



**UL Recognized**Approval ID: E240868



https://www.phoenixcontact.com/us/products/1680539



### Classifications

UNSPSC 21.0

#### **ECLASS**

|      | ECLASS-11.0 | 23111190 |
|------|-------------|----------|
|      | ECLASS-12.0 | 23111190 |
|      | ECLASS-13.0 | 23111190 |
| ETIM |             |          |
|      | ETIM 9.0    | EC000032 |
| UN   | ISPSC       |          |

31261500



https://www.phoenixcontact.com/us/products/1680539



### Environmental product compliance

#### EU RoHS

| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
|---|--|
| China RoHS                              |  |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|   | No hazardous substances above the limits |
| EU REACH SVHC                           |  |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com