


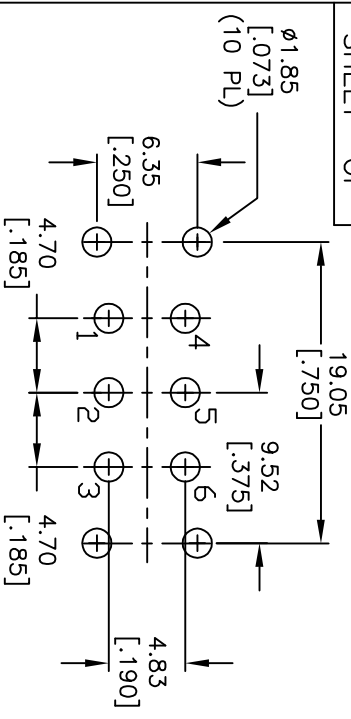


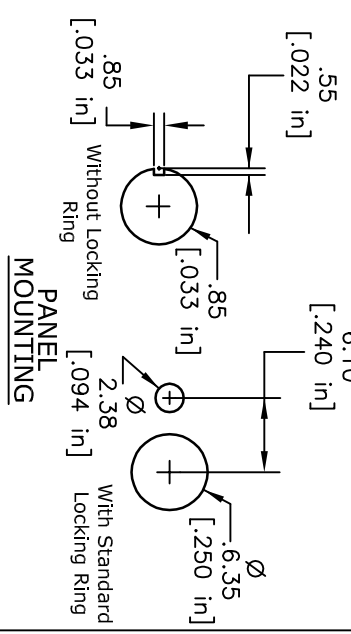

RECOMMENDED PANEL MOUNTING

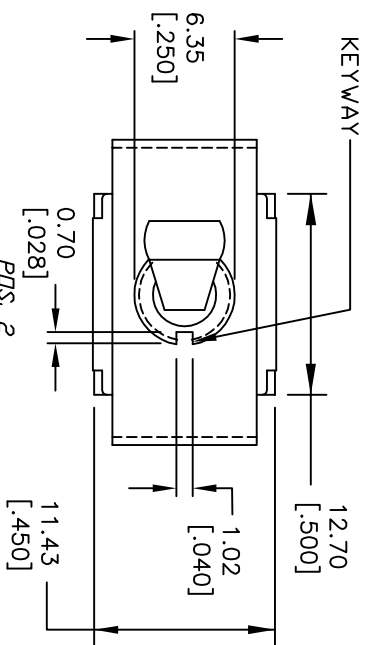


SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	OFF	DN	
2-3,5-6	OPEN	2-1,5-4	



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC;
2A @250VAC
5. FIXED TERM. & MOVING CONTACT:
Copper Alloy w/Silver Plate.
6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30C to 85C
10. HARDWARE TO BE SHIPPED BULK
T100000 - HEXNUT - QTY 2
T100011 - LOCKWASHER - QTY 1
T100015 - LOCKRING - QTY 1

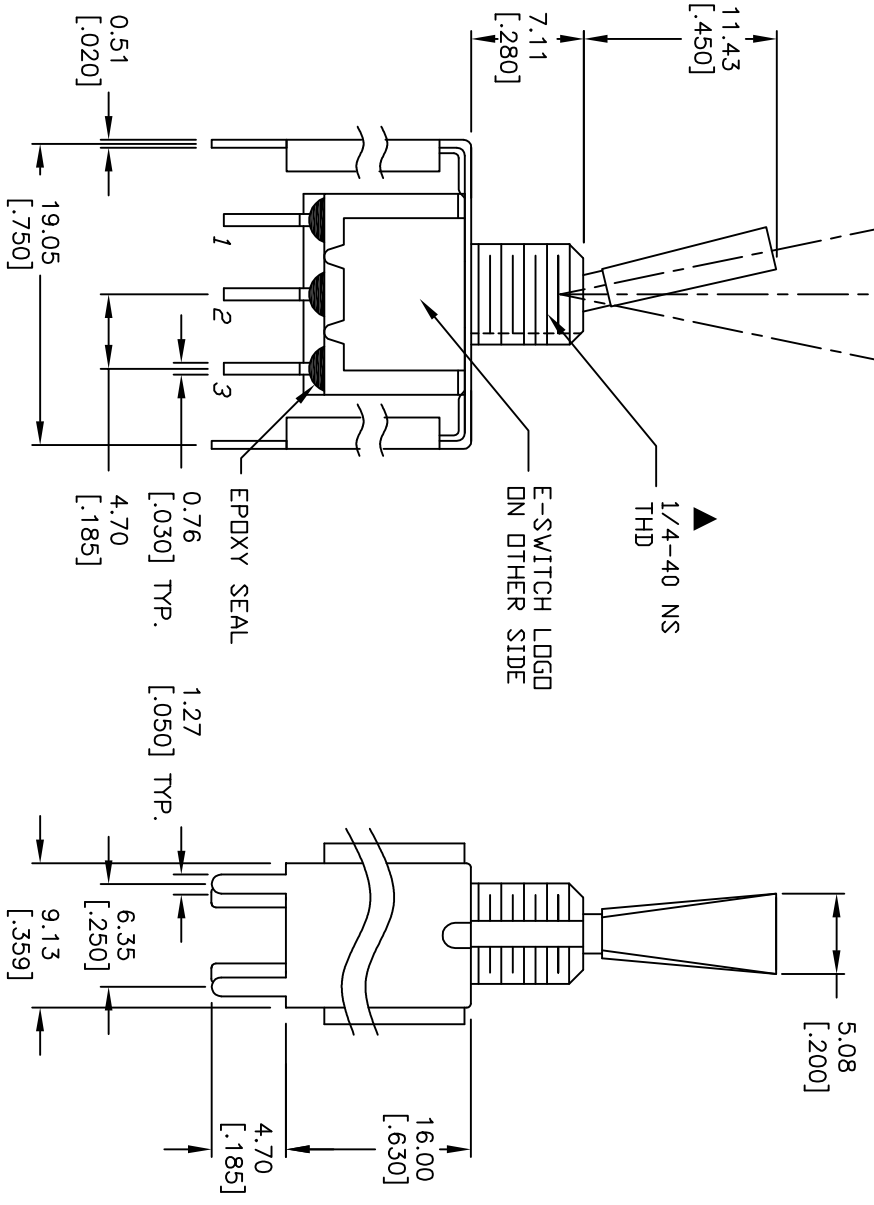

TITLE			
100DP3T6B11VS5QEH	DATE	DR	DWG
10/14/08	10/14/08	BLR	ST123060
REV	ECN No.	DESCRIPTION	DATE
A	18272	RELEASED FOR PRODUCTION	10/14/08
REV.	ECN No.	DESCRIPTION	DATE