
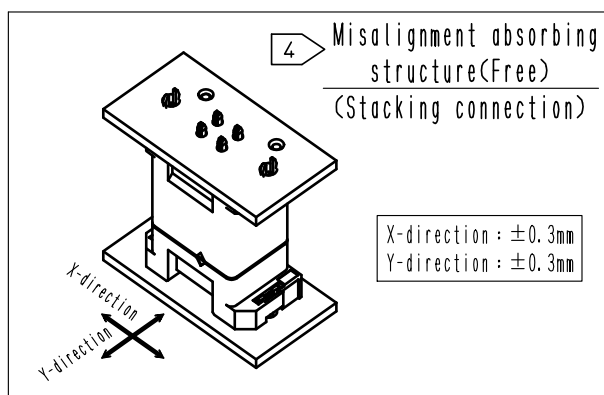
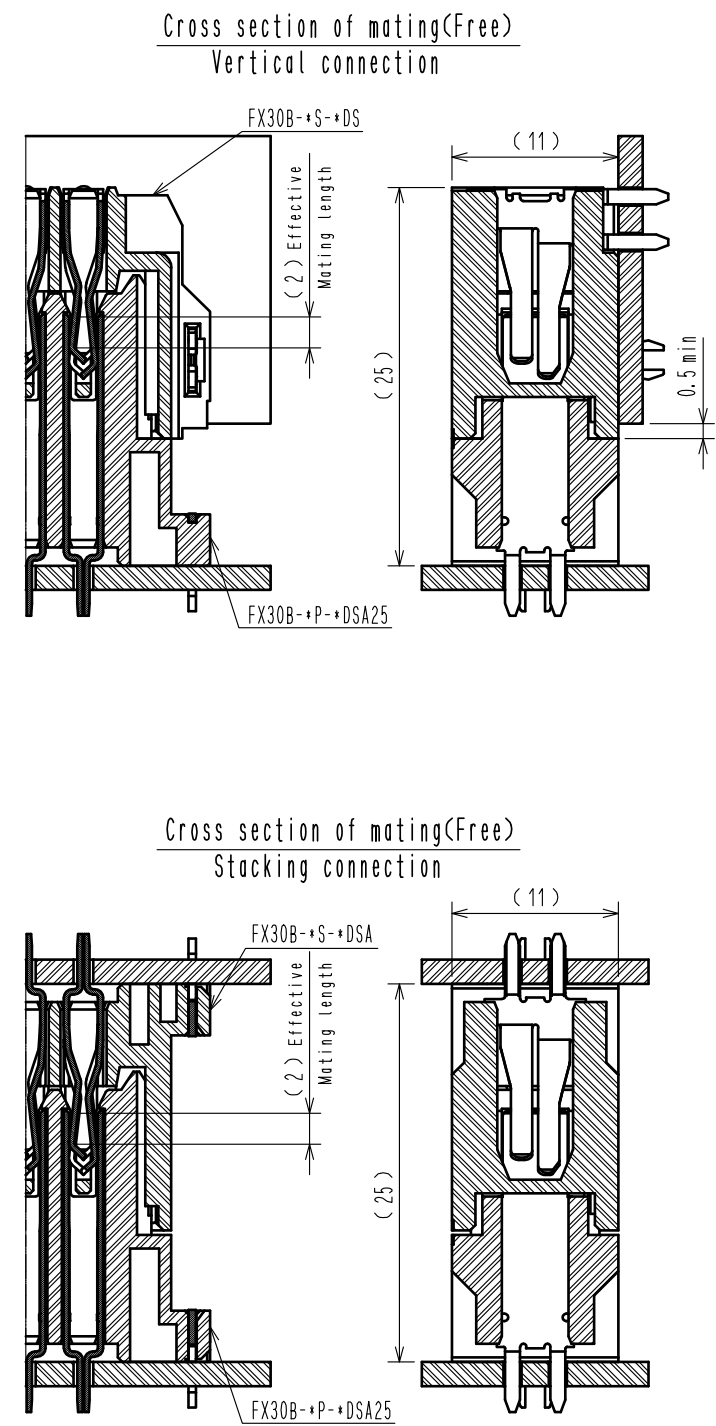
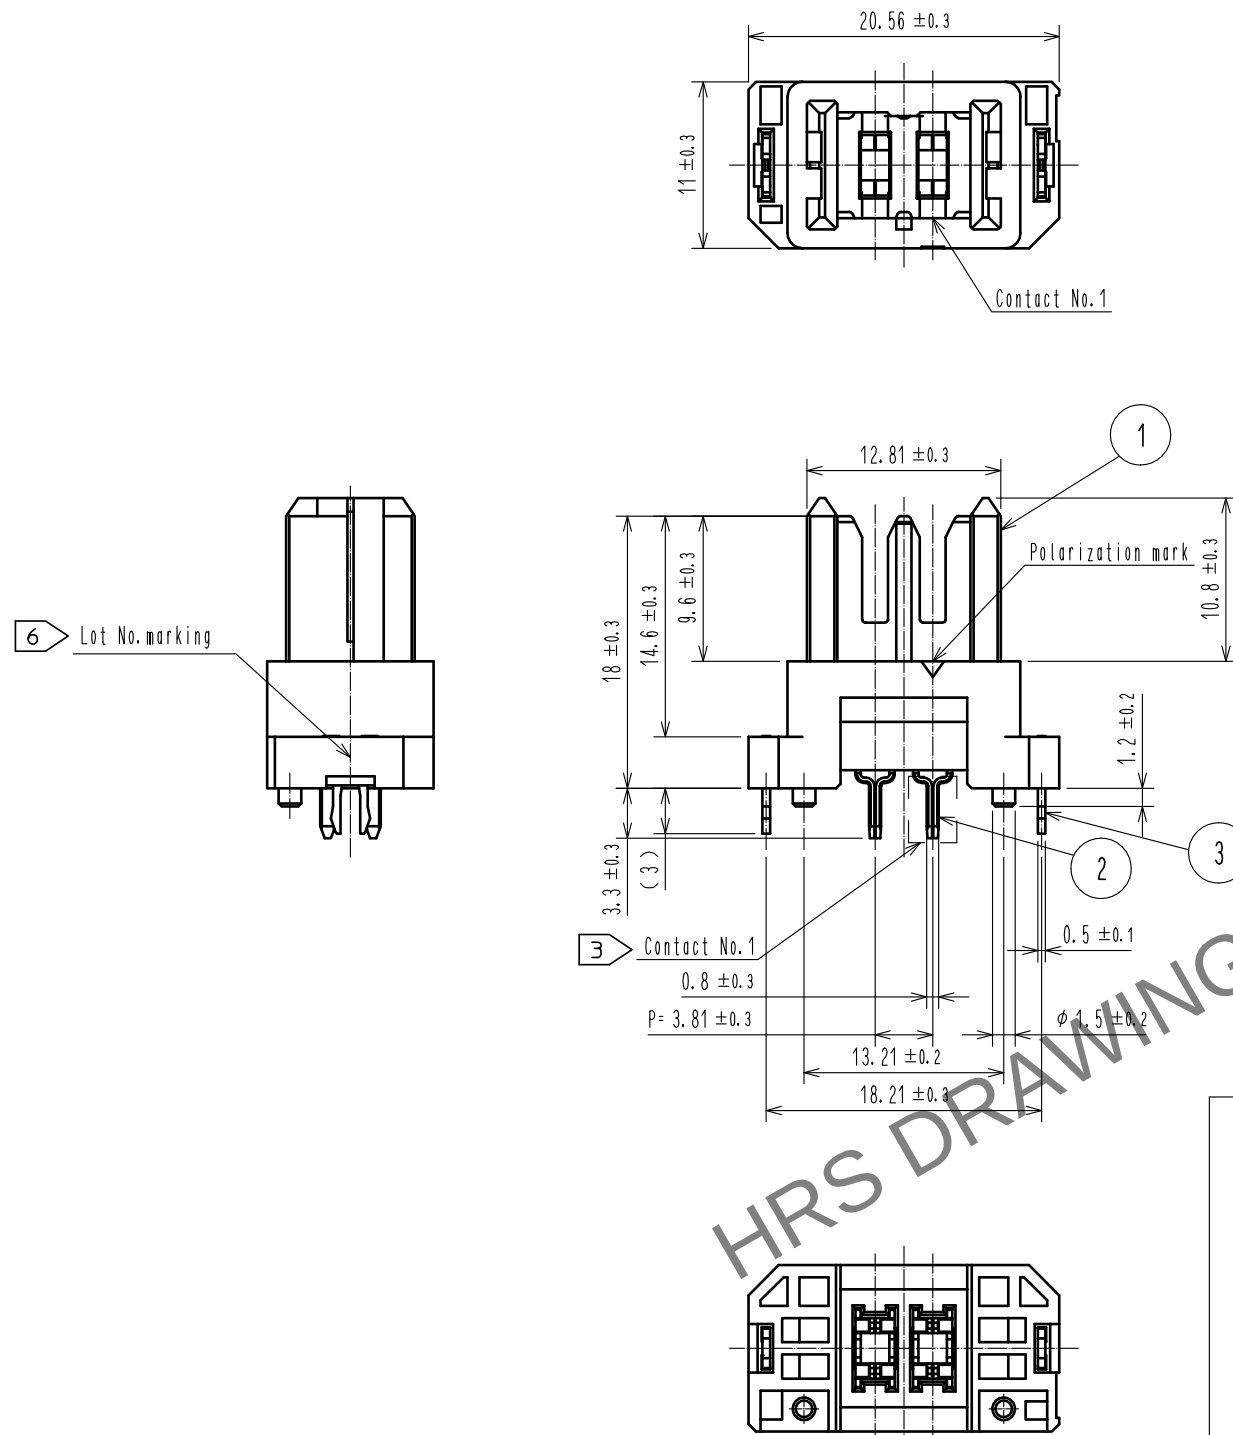


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

A
B
C
D
E
F



- Note 1 This product is packaged in tray.(49pcs/tray)
2 Blemish and hit mark can be occurred through out the manufacturing process which dosen't affect quality level.
Also, black spot could be observed on the surface of housing.
3 For the contact No., adjacent two pairs of leads placed back-to-back (4 leads in total) compose one line.
4 Misalignment absorbing range:±0.3mm max.
5 The dimension in parentheses are for references.
6 Lot NO. is indicated at either one of the position as shown.
7 UL(File No. E52653)
C-UL(File No. E52653)
TUV(Certificate No. R50275872) authorization article.

2	COPPER ALLOY	CONTACT AREA:GOLD-PLATING 0.1 μm			4	POLYSTYRENE				
		LEAD AREA:TIN-PLATING 1.0 μm								
		UNDER PLATING:NICKEL 1.0 μm					TIN-PLATING 3.0 μm			
1	POLYAMIDE	BLACK UL94V-0			3	PHOSPHOR BRONZE	UNDER PLATING:NICKEL 1.0 μm			
NO.	MATERIAL	FINISH , REMARKS			NO.	MATERIAL	FINISH , REMARKS			
UNITS mm				SCALE 2 : 1	COUNT  1	DESCRIPTION OF REVISIONS DIS-F-00006019		DESIGNED AK. IWAHORI	CHECKED HT. YAMAGUCHI	DATE 20200406
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA			20130307		DRAWING NO. EDC3-347259-00			
		CHECED : KI. HIROKAWA			20130307		PART NO. FX30B-2P-3. 81DSA25			
		DESIGNED : DK. AIMOTO			20130307		CODE NO. CL570-3200-8-00			
		DRAWN : DK. AIMOTO			20130307		 1 2			

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

