



SETRON, cylindrical fuse link, 14x51 mm, 20 A, aM, Un AC: 500 V

Figure similar

| Model                                                                               |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| product brand name                                                                  | SETRON                   |
| product designation                                                                 | Cylindrical fuse link    |
| General technical data                                                              |                          |
| operating class of the fuse link                                                    | aM                       |
| size of the fuse link                                                               | 14x51 mm                 |
| type of voltage of the operating voltage                                            | AC                       |
| supply voltage at DC                                                                | 250 V                    |
| operating voltage at AC rated value                                                 | 500 V                    |
| Dissipation                                                                         |                          |
| power loss [W]                                                                      | 1 W                      |
| power loss [W] for rated value of the current at AC in hot operating state per pole | 1 W                      |
| Main circuit                                                                        |                          |
| operational current rated value                                                     | 20 A                     |
| Product details                                                                     |                          |
| product component striker                                                           | No                       |
| Mechanical Design                                                                   |                          |
| mounting position                                                                   | Any, preferably vertical |
| net weight                                                                          | 21 g                     |
| Approvals Certificates                                                              |                          |
| General Product Approval                                                            | other                    |

[Confirmation](#)



[Miscellaneous](#)

[Confirmation](#)

Environment

[Environmental Con-  
firmations](#)

Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
Information- and Downloadcenter (Catalogs, Brochures,...)  
<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NW8107-1>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NW8107-1>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NW8107-1](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW8107-1)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

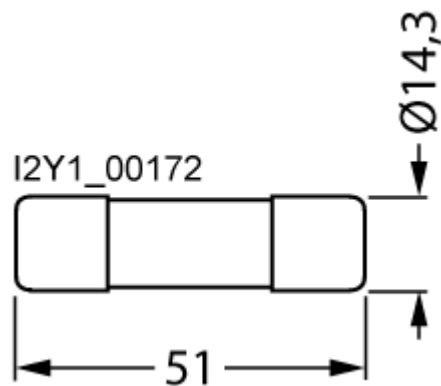

last modified:

2/17/2023 

