







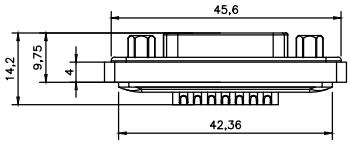





| 产品材料 | |
|---|---|
| 外壳材料及镀层 | |
| 胶体 | |
| 防火等级 | |
| 插针材料 | |
| 插针镀层 | |
| 六角螺母 | |

| 电气性能 | |
|---|---|
| 额定电流 | |
| 耐电压 | |
| 接触电阻 | |
| 绝缘电阻 | |
| 工作温度 | |

声明：请贵司在2个工作日内确认并回传图纸，过期未回传的，默认为贵司已确认合格

业务确认

| 客户 | | 图号 | | 日期 | 制图 | 审核 |
|---|---|---|---|---|---|---|
| 料号 | | | | 2024-06-12 | 蔡家俊 | |
| 品名 | | | | 单位：mm | Size:A4 | |

RoHS

GENERAL TOLERANCE (UNLESS SPECIFIED)
N/A

THIRD ANGLE

| | | | |
|---|---|---|---|
| DWN | | | |
| CHK | | | |
| APVD | | | |
| UNIT MM | REV A | TITLE | E-DB2-F15-PWA-N |
| SIZE A4 | SHEET 1 OF 1 | PART NO | c190302-00003 |
| | | DRAWING NO | |

CAZN正成









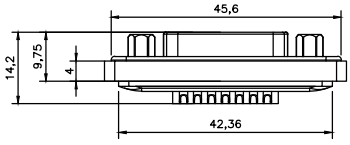





| Product materials | |
|---|---|
| Shell material and coating | |
| Colloid | |
| Fire rating | |
| CONTACT MATERIAL | |
| CONTACT FINISH | |
| RIVETED INSERT | |

| Electrical performance | |
|---|---|
| Rated current | |
| Voltage withstand | |
| Contact resistance | |
| Insulation resistance | |
| Working temperature | |

Tatement: Please confirm and return the drawings within 2 working days. If the drawings are not returned after the expiration date, the default is that you have been confirmed to be qualified.

Business confirmation

| Customer | | DWN NO | | DATE | DWN | APVD |
|---|---|---|---|---|---|---|
| P/N | | | | 2024-06-12 | 蔡家俊 | |
| Product Name | | | | UNIT: mm | Size:A4 | |

RoHS

GENERAL TOLERANCE (UNLESS SPECIFIED)
≤10 ±0.1
<10~≤20 ±0.2
<20~≤50 ±0.5
Angle ±3°

THIRD ANGLE

| | | | |
|---|---|---|---|
| DWN | | | |
| CHK | | | |
| APVD | | | |
| UNIT MM | REV A | TITLE | E-DB2-F15-PWA-N |
| SIZE A4 | SHEET 1 OF 1 | PART NO | c190302-00003 |
| | | DRAWING NO | |

CAZN正成