

1194423

https://www.phoenixcontact.com/us/products/1194423

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Pre-configured point-to-point Ethernet bridge for U.S. and Canada with internal antennas for pole mounting. IP67, wireless Ethernet communication up to 300 Mbps, frequency: 5 GHz, 10/100/1000 Mbps RJ45, passive PoE (8 - 30 V DC) powered.

Commercial data

Item number	1194423
Packing unit	1 pc
Sales key	DN16
Product key	DNN2W3
GTIN	4063151249519
Weight per piece (including packing)	2,380 g
Weight per piece (excluding packing)	2,220 g
Customs tariff number	85176200
Country of origin	PL



https://www.phoenixcontact.com/us/products/1194423



Technical data

Notes

Note on application	Only for industrial use
Trade restriction	
CE note	The products are offered exclusively for export outside the EU and the European Economic Area.

Product properties

Product type	Wireless module
Туре	Stand-Alone
Wireless card	
Number	1
Туре	IEEE 802.11 b/g/n 5 GHz to 300 Mbps
Assembly note	Permanently installed

Electrical properties

Supply: Module electronics

Supply voltage	120 V AC (converted to 24 V DC via passive POE adapter (included))
Current consumption	417 mA (maximum (at 24 V))
Power consumption	11 W (maximum (at 24 V))

Interfaces

Antenna

Number	1
Connection method	permanently installed
Note on the connection method	Dual polarized: Horizontal and vertical
Gain	11 dBi

Functions

Security	256-bit AES-CCM Encryption
	WPA2
Wireless licenses	USA, Canada
Country support	USA
	Canada

Ethernet (RJ45)

Number of interfaces	1 ()
Connection method	RJ45
Note on the connection method	Auto negotiation and autocrossing
Transmission speed	10/100/1000 Mbps
Transmission physics	Copper



https://www.phoenixcontact.com/us/products/1194423



Number of interfaces	1 ()
Wireless	
Designation	Wireless LAN
Antenna connection method	(Internal)
Frequency band	5 GHz
Wireless standard	IEEE 802.11 (Wi-Fi Alliance)
	b (Wi-Fi 1)
	g (Wi-Fi 3)
	n (Wi-Fi 4)
Number of wireless interfaces	1 IEEE 802.11 b/g/n
Wireless modules that can be connected	1 ()

Dimensions

Dimensional drawing	F S
Width	185 mm
Height	63.5 mm
Depth	185 mm
Note on dimensions	Outside dimensions

Material specifications

Color	white
Housing material	Polystyrene

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-40 °C 75 °C
Ambient temperature (storage/transport)	-45 °C 85 °C
Permissible humidity (operation)	5 % 95 % (non-condensing)
Permissible humidity (storage/transport)	5 % 95 % (non-condensing)

EMC data

Emitted interference

Standards/regulations	FCC Part 15B
Test result	Class A



1194423

https://www.phoenixcontact.com/us/products/1194423

Emitted interference	
Standards/regulations	FCC Part 15C
Mounting	
Mounting type	Mast mounting
Assembly note	Internal antenna





https://www.phoenixcontact.com/us/products/1194423



Drawings

Dimensional drawing

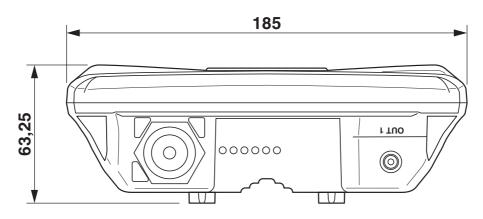


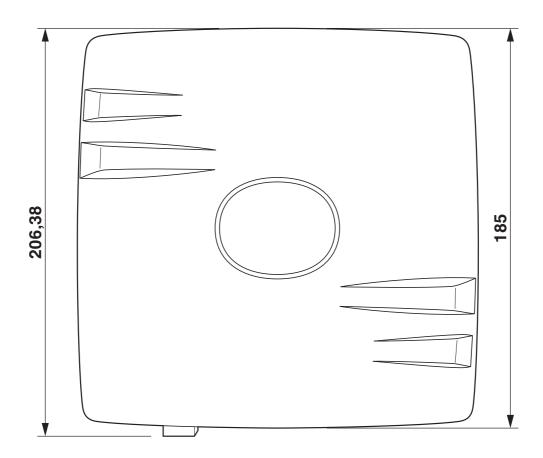



https://www.phoenixcontact.com/us/products/1194423



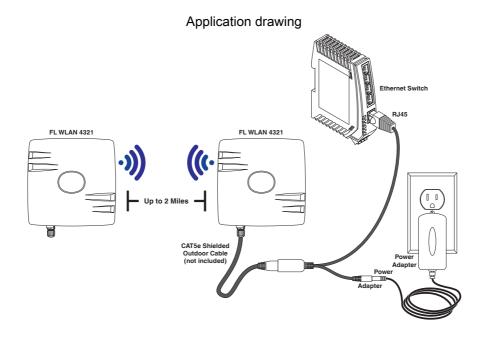



1194423

https://www.phoenixcontact.com/us/products/1194423

Classifications

ECLASS

ECLASS-11.0	19170501
ECLASS-12.0	19170501
ECLASS-13.0	19170501

ETIM

ETIM :	9.0	EC000816



https://www.phoenixcontact.com/us/products/1194423



Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Not applicable, No electrical and electronic equipment (EEE), cannot be used in EEE
EU REACH SVHC	
REACH candidate substance (CAS No.)	



https://www.phoenixcontact.com/us/products/1194423



Accessories

NBC-R4AQ/25,0-94D/OE - Network cable

1211706

https://www.phoenixcontact.com/us/products/1211706



Network cable

NBC-R4AQ/50,0-94D/OE - Network cable

1211705

https://www.phoenixcontact.com/us/products/1211705



Network cable



https://www.phoenixcontact.com/us/products/1194423



UNO-PS/1AC/24DC/ 30W - Power supply unit

2902991

https://www.phoenixcontact.com/us/products/2902991



Primary-switched UNO POWER power supply for DIN rail mounting, input: 1-phase, output: $24\ V\ DC/30\ W$

PP-RJ-SC - Patch panel

2703016

https://www.phoenixcontact.com/us/products/2703016



Patch panel, RJ45 jack on screw terminal blocks, CAT5e, 10/100/1000 Mbps, DIN rail adapter, IP20, shield contacting with strain relief



https://www.phoenixcontact.com/us/products/1194423



PP-RJ-SCC - Patch panel

2703018

https://www.phoenixcontact.com/us/products/2703018



Patch panel, RJ45 jack on Push-in terminal blocks, CAT5e, 10/100/1000 Mbps, DIN rail adapter, IP20, shield contacting with strain relief

PP-RJ-IDC - Patch panel

2703019

https://www.phoenixcontact.com/us/products/2703019



Patch panel, RJ45 jack on IDC terminal blocks, CAT6, 10/100/1000 Mbps, DIN rail adapter, IP20, shield contacting with strain relief



https://www.phoenixcontact.com/us/products/1194423



FL SWITCH 1005N - Industrial Ethernet Switch

1085039

https://www.phoenixcontact.com/us/products/1085039



Narrow Ethernet switch, five RJ45 ports with 10/100 Mbps on all ports, automatic data transmission speed detection, autocrossing function, and QoS

FL SWITCH 1008N - Industrial Ethernet Switch

1085256

https://www.phoenixcontact.com/us/products/1085256



Narrow Ethernet switch, eight RJ45 ports with 10/100 Mbps on all ports, automatic data transmission speed detection, autocrossing function, and QoS

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com