
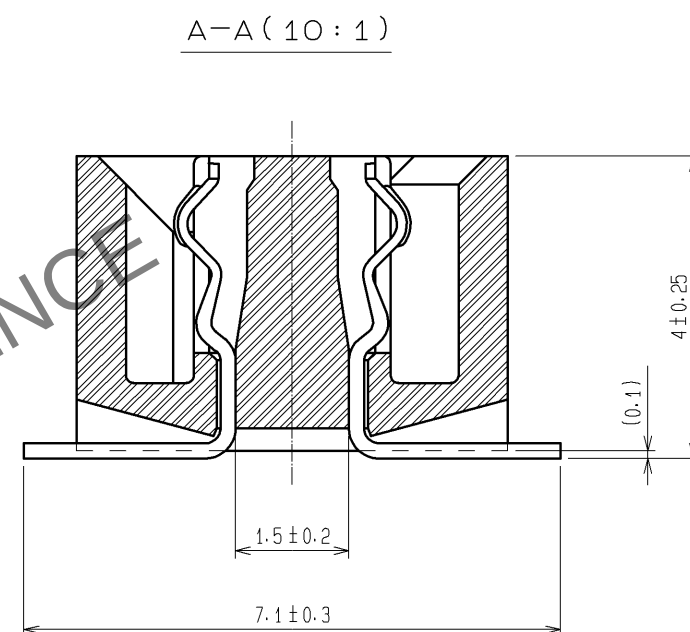
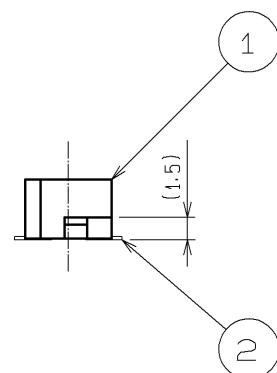
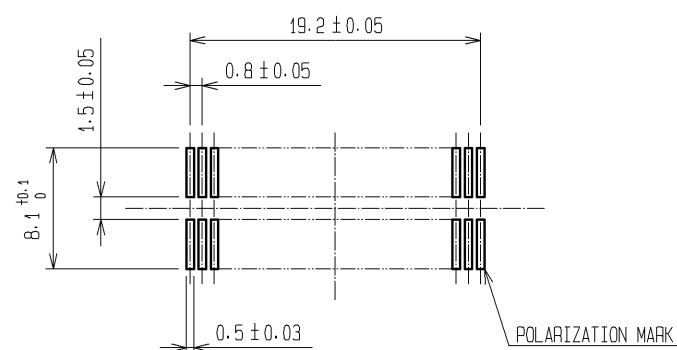


RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(METAL MASK THICKNESS:t=0.15)



- NOTE 1  HRS MARK SHALL BE OPTIONAL.
- 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
- 3 FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK
MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
- 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.				
					LEAD AREA:TIN-PLATING 1μm min.				
					UNDER PLATING:NICKEL 2μm min.				
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.	APPROVED	:HS. OKAWA	08. 06. 23		DRAWING NO.		EDC3-071645-25		
	CHECKED	:HT. YAMAGUCHI	08. 06. 20		PART NO.		FX6A-50S-0.8SV(71)		
	DESIGNED	:KN. SHIBUYA	08. 06. 20		CODE NO.		CL576-0304-5-71		
	DRAWN	:TH. SANO	08. 06. 19						
									