
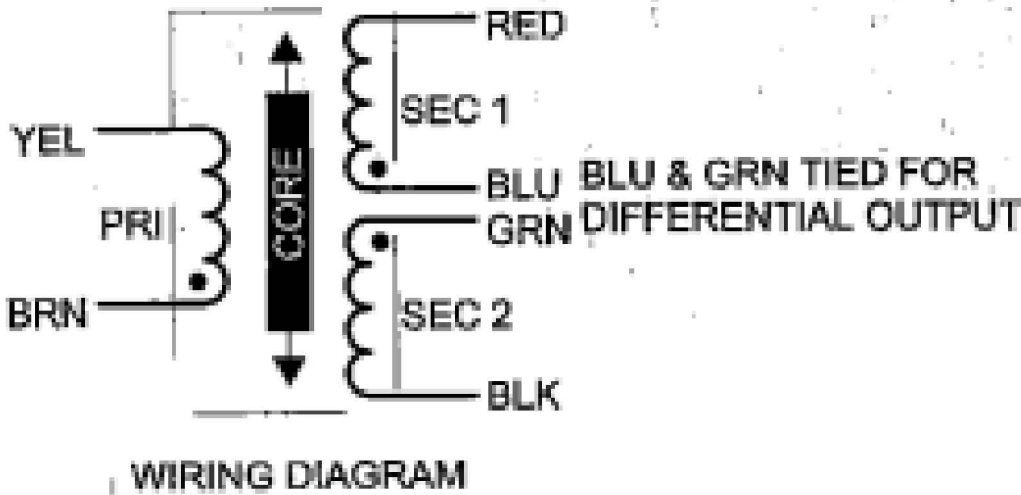


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	A	-	-	-

SPECIFICATIONS

INPUT VOLTAGE: 3.0
INPUT FREQUENCY: 2.5 KHz
ELECTRICAL STROKE: +/- 0.050 " [1.27]
SENSITIVITY: 6.5mv / VOLT / .001"
SENSITIVITY: 256 mv / VOLT / m m
LINEARITY: 0.25% OF FULL RANGE
PHASE SHIFT: +1.1 DEGREES
PRIMARY IMPEDANCE: 400 OHMS
SECONDARY IMPEDANCE: 2460 OHMS

REVISIONS			
REV.	DESCRIPTION	DATE:	APPR.
A	REDRAWN WITHOUT CHANGE	7/17/98	R.E.A.

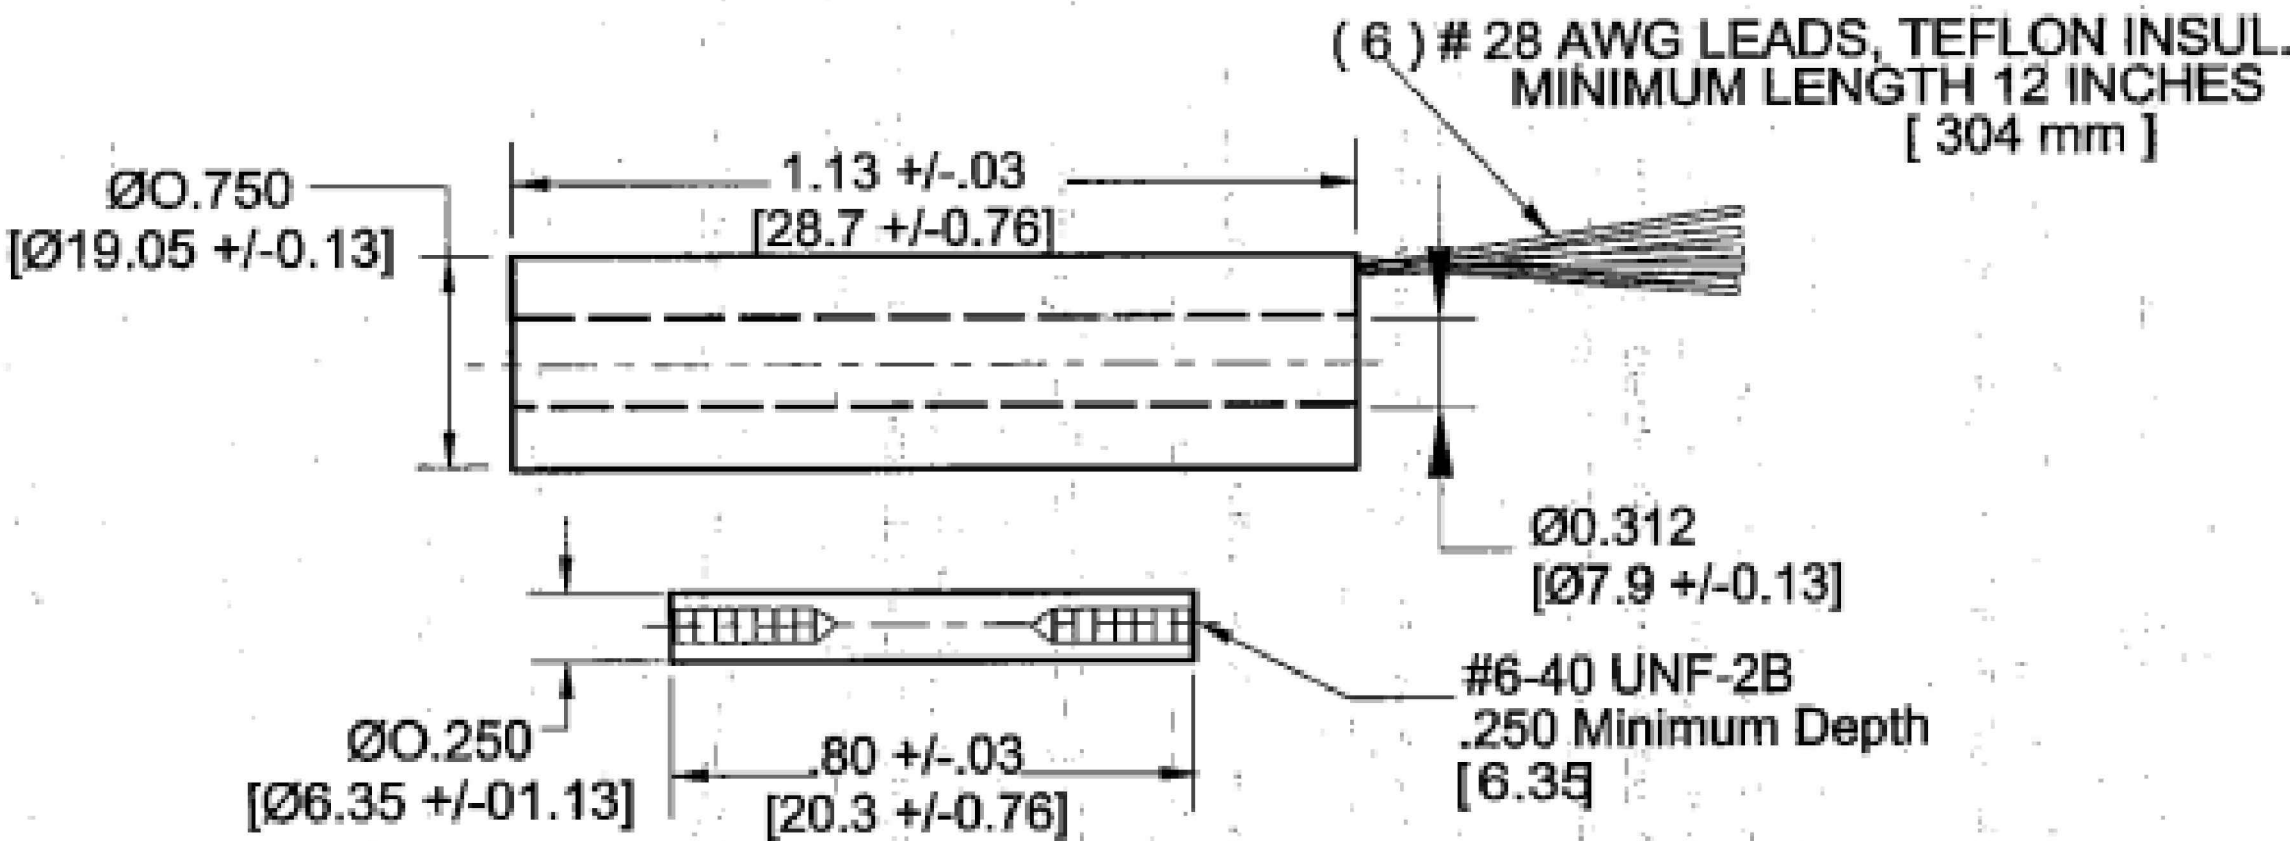

[1] DENOTES MILLIMETER

UNLESS OTHERWISE SPECIFIED ALL
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ANGLES: +/- 0.5 DEG.
FRACTIONS: +/- 1/64
DECIMAL:
XX" = +/- .01
XXX" = +/- .005

This Drawing and Specifications are the property of
Macro Sensors, Inc. or Howard A. Schaefer Technologies, Inc.
DO NOT COPY without the written approval of Macro Sensors.

FINISH:

DRAFTSMAN:	DATE:
R.E.A.	28 FEB 95
CHECKER:	DATE:
APPROVED:	DATE:
APPROVED:	DATE:
APPROVED:	DATE:

Macro Sensors Div. of Howard A. Schaefer Technologies, Inc.	
TITLE PR 750 050 OUTLINE	
C.A.G.E. No. A 06WWO	DRAWING No. 010912500000
SCALE: NONE	SHEET No. 1 of 1

MATERIAL:

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN — CHK — APVD —	TE Connectivity	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC — APPLICATION SPEC —	NAME PR 750 050 OUTLINE —	
	0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —	WEIGHT	SIZE A2	CAGE CODE 00779
	FINISH	CUSTOMER DRAWING	DRAWING NO C=010912500000	RESTRICTED TO —
		SCALE NTS	SHEET 1 OF 1	REV A