


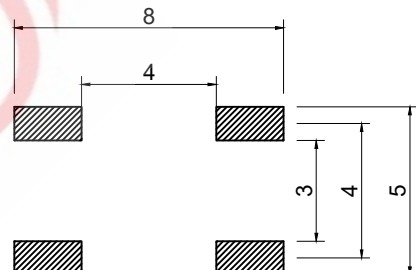


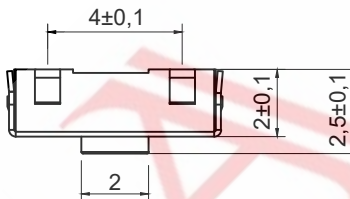






1		2		3		4		5		6		7		8																																																																														
SAMZO		REAC/ROHS								REV		ECN NO		DESRIPTION		DESIGN		APPROVAL		DATE																																																																								
										A1		NEW		Replace frame						2018.06.12																																																																								
E																																																																																												
D																																																																																												
C		L 4 G 25 * 1 1 0 Ⓐ Ⓑ Ⓒ Ⓓ Ⓔ Ⓕ Ⓖ Ⓗ										PCB. 焊接图																																																																																
		A. 系列:L-6. 2*6. 2mm硅胶柄 B. 贴装方式:4-立式贴片 C. 引脚规格:G-4PIN D. 操作高度:25-2. 5mm E:操作力度:1-160/2-260gf F:操作寿命:1-100, 000/次 G:固定方式:1-无住 H:物料编码:0-常规																																																																																										
B		主要技术参数、性能 The Main Thchnology Performance						 电路图																																																																																				
A		<table><tr><td>额定电流、电压 Rate voltage, current</td><td>50mA DC12V</td></tr><tr><td>接触电阻 Contact resistance</td><td>≤50mΩ</td></tr><tr><td>按力 Operating force</td><td>±50gf</td></tr><tr><td>行程 Travel</td><td>0. 25±0. 10mm</td></tr><tr><td>绝缘电阻 Insulated resistance</td><td>≥100MΩ</td></tr><tr><td>介电强度 Dielectric strength</td><td>≥250VAC/1min</td></tr></table>		额定电流、电压 Rate voltage, current	50mA DC12V	接触电阻 Contact resistance	≤50mΩ	按力 Operating force	±50gf	行程 Travel	0. 25±0. 10mm	绝缘电阻 Insulated resistance	≥100MΩ	介电强度 Dielectric strength	≥250VAC/1min	<table><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td>GENERAL TOLERANCE</td><td></td></tr><tr><td></td><td></td><td></td><td>≥0~2<</td><td>±0. 15</td></tr><tr><td>DESIGN</td><td>WANGGUIFA</td><td>2018.06.12</td><td>≥2~5<</td><td>±0. 25</td></tr><tr><td>CHECKED</td><td>ZHENGUILAN</td><td>2018.06.12</td><td>≥0~2<</td><td>±0. 15</td></tr><tr><td>APPROVED</td><td>LILIANJIANG</td><td>2018.06.14</td><td>≥5</td><td>±0. 35</td></tr></table>															GENERAL TOLERANCE					≥0~2<	±0. 15	DESIGN	WANGGUIFA	2018.06.12	≥2~5<	±0. 25	CHECKED	ZHENGUILAN	2018.06.12	≥0~2<	±0. 15	APPROVED	LILIANJIANG	2018.06.14	≥5	±0. 35	<table><tr><td colspan="2">FIRST VIEW</td><td colspan="2" rowspan="4">The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM</td><td colspan="2">TITLE: 6. 2*6. 2*2. 5绿硅胶柄包脚SMT</td></tr><tr><td colspan="2"></td><td colspan="2">DWG NO: L4G-P036</td></tr><tr><td colspan="2">SCALE 1:1 UNIT mm</td><td colspan="2">PART NO: L4G00071</td></tr><tr><td colspan="2">SAMZO COMPONENTS Electronic switch and connector manufacturer</td><td colspan="2">MODEL NO: L4G25-* -110</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2">NAME: TACT SWITCH</td></tr></table>		FIRST VIEW		The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM		TITLE: 6. 2*6. 2*2. 5绿硅胶柄包脚SMT				DWG NO: L4G-P036		SCALE 1:1 UNIT mm		PART NO: L4G00071		SAMZO COMPONENTS Electronic switch and connector manufacturer		MODEL NO: L4G25-* -110						NAME: TACT SWITCH															
额定电流、电压 Rate voltage, current	50mA DC12V																																																																																											
接触电阻 Contact resistance	≤50mΩ																																																																																											
按力 Operating force	±50gf																																																																																											
行程 Travel	0. 25±0. 10mm																																																																																											
绝缘电阻 Insulated resistance	≥100MΩ																																																																																											
介电强度 Dielectric strength	≥250VAC/1min																																																																																											
			GENERAL TOLERANCE																																																																																									
			≥0~2<	±0. 15																																																																																								
DESIGN	WANGGUIFA	2018.06.12	≥2~5<	±0. 25																																																																																								
CHECKED	ZHENGUILAN	2018.06.12	≥0~2<	±0. 15																																																																																								
APPROVED	LILIANJIANG	2018.06.14	≥5	±0. 35																																																																																								
FIRST VIEW		The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM		TITLE: 6. 2*6. 2*2. 5绿硅胶柄包脚SMT																																																																																								
				DWG NO: L4G-P036																																																																																								
SCALE 1:1 UNIT mm				PART NO: L4G00071																																																																																								
SAMZO COMPONENTS Electronic switch and connector manufacturer				MODEL NO: L4G25-* -110																																																																																								
				NAME: TACT SWITCH																																																																																								
1		2		3		4		5		6		7		8																																																																														