


PART NO.	"A" IN. (mm) +/- .062	"B" IN. (mm) +/- .062	LENGTH	VIEW
T024X000FJT	0.24 (6.10)	0.38 (9.65)	100 (2540) FT.	1
T031X000FJT	0.31 (7.87)	0.345 (8.89)	100 (2540) FT.	1
T038X000FJT	0.38 (9.65)	0.31 (7.87)	100 (2540) FT.	1
T050X000FJT	0.50 (12.7)	0.25 (6.35)	100 (2540) FT.	2

2 NOTES:
1. MILLIMETER ARE IN ().

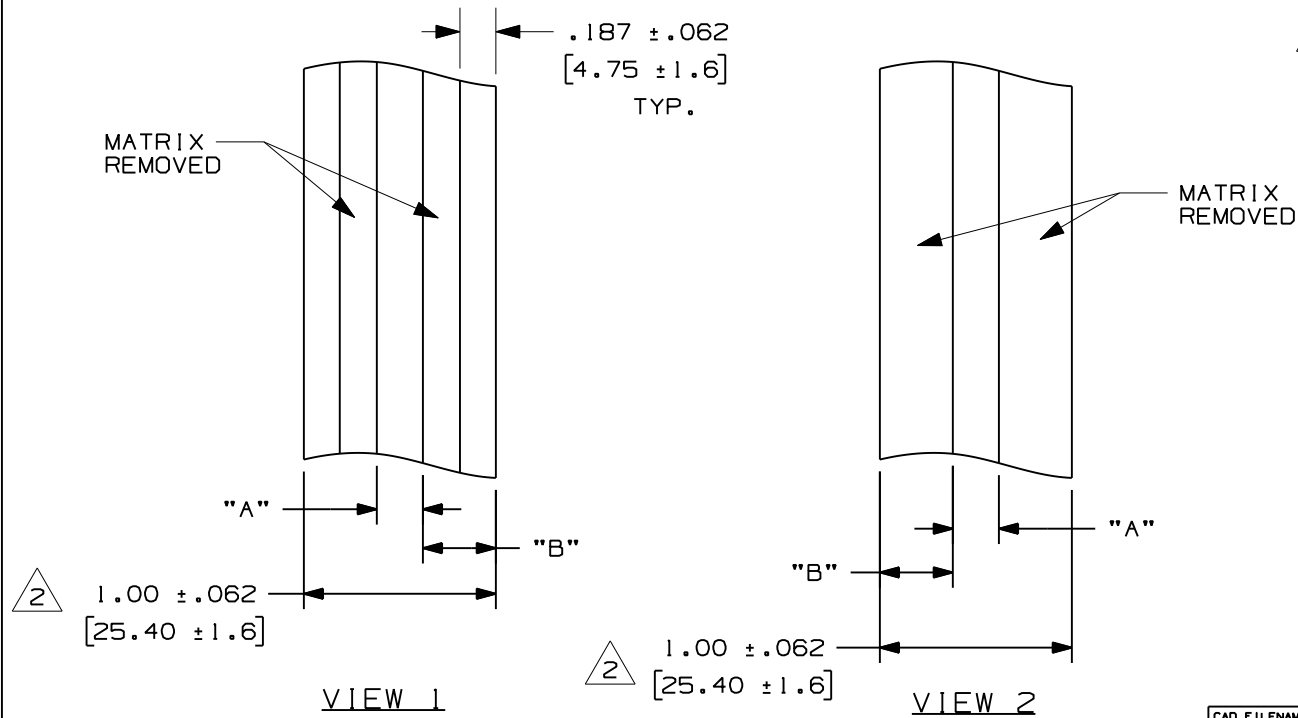

CAD FILENAME/LAYERS
100472ET_DC_C10276/02C

PANDUIT CORP. TINLEY PARK, ILLINOIS

CUSTOMER DRAWING
OPTIMUM POLYOLEFIN
THERMAL TRANSFER LABELS

2 4/22/09 RVU ADD NOTES 1. ADD +/- .062 TO A, B, .187 AND TABLE. REMOVE 100', SET UP NEW COLUMN OF 100'. CHG. ON TITLE BLOCK TOL. TO THE STANDARD.

5730

R

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± .1 (.XXX) ± .025
(.XX) ± .062 ANGLES ±

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

1 VOID

0 10-1-04 RVU DWY RELEASED TO PRODUCTION.

4139

R

DRAWN BY
RVU

DATE
10-1-04

CHK'D

MAT'L:

WHITE
POLYOLEFIN
GMP04

SCALE
NTS

DRAWING NO.
C10276

DWG
A
SIZE

DESCRIPTION

ECN - R

CUST

SUP