

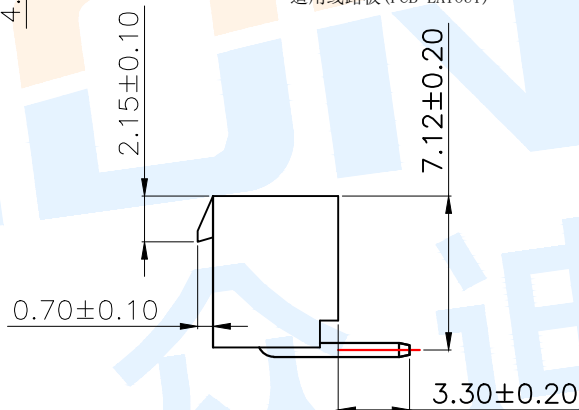
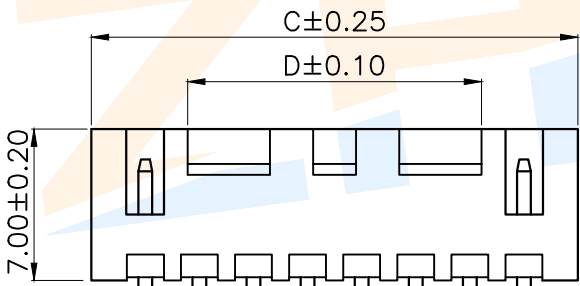
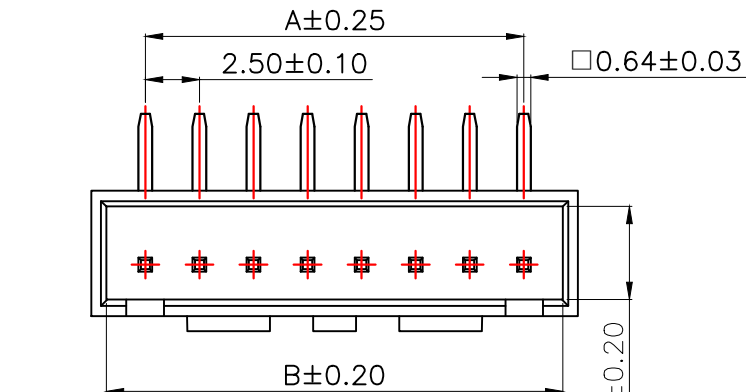



RoHS

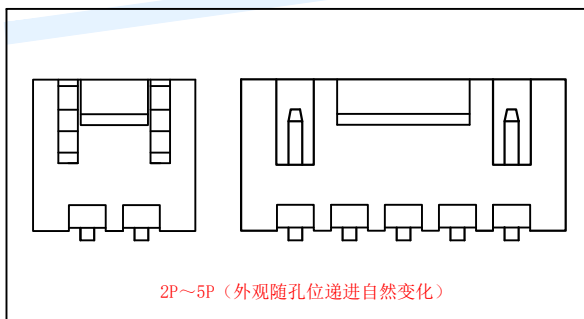

适用线路板 (PCB LAYOUT)

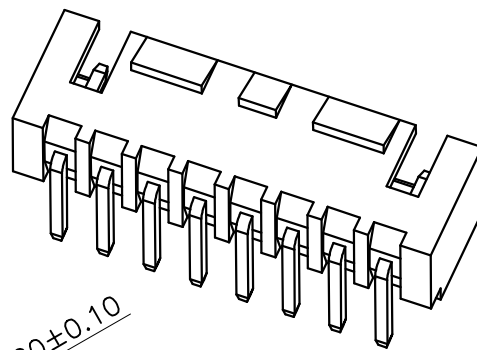

2P~5P (外观随孔位递进自然变化)

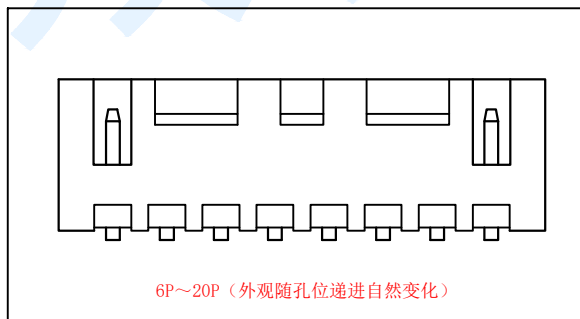

6P~20P (外观随孔位递进自然变化)

Model No.	Pin	A	B	C	D
WAFER-XHB2.54-2PWZ-W	2	2.50	6.10	7.50	3.10
WAFER-XHB2.54-3PWZ-W	3	5.00	8.60	10.00	3.10
WAFER-XHB2.54-4PWZ-W	4	7.50	11.10	12.50	3.60
WAFER-XHB2.54-5PWZ-W	5	10.00	13.60	15.00	6.10
WAFER-XHB2.54-6PWZ-W	6	12.50	16.10	17.50	8.60
WAFER-XHB2.54-7PWZ-W	7	15.00	18.60	20.00	11.10
WAFER-XHB2.54-8PWZ-W	8	17.50	21.10	22.50	13.60
WAFER-XHB2.54-9PWZ-W	9	20.00	23.60	25.00	16.10
WAFER-XHB2.54-10PWZ-W	10	22.50	26.10	27.50	18.60
WAFER-XHB2.54-11PWZ-W	11	25.00	28.60	30.00	21.10
WAFER-XHB2.54-12PWZ-W	12	27.50	31.10	32.50	23.60
WAFER-XHB2.54-13PWZ-W	13	30.00	33.60	35.00	26.10
WAFER-XHB2.54-14PWZ-W	14	32.50	36.10	37.50	28.60
WAFER-XHB2.54-15PWZ-W	15	35.00	38.60	40.00	31.10
WAFER-XHB2.54-16PWZ-W	16	37.50	41.10	42.50	33.60
WAFER-XHB2.54-17PWZ-W	17	40.00	43.60	45.00	36.10
WAFER-XHB2.54-18PWZ-W	18	42.50	46.10	47.50	38.60
WAFER-XHB2.54-19PWZ-W	19	45.00	48.60	50.00	41.10
WAFER-XHB2.54-20PWZ-W	20	47.50	51.10	52.50	43.60

Specifications/技术规格:

- 1.Poles/线数: 2~20P
- 2.Wire range/适用线规: AGW 28#~22#
- 3.Applicable PC board thickness/适用PC板厚度: 1.6mm
- 4.Current rating/额定电流: 3.0A
- 5.Voltage rating/额定电压: 250V DC/AC
- 6.Insulation Resistance/绝缘电阻: 1000MΩ Min
- 7.Dielectric Withstanding/ 耐电压: 1000V AC/minute
- 8.Contact Resistance/ 接触电阻: 30mΩ Max
- 9.Operating Temperature/ 工作温度: -25℃ to +85℃

Ⓑ	Terminal			Brass	Plating Sn
Ⓐ	Housing		1	PA66	White
NO.	Name	Number	Qty	Materil	Remarks

ZHONGDI® Zhongdi Electronic Technology Co., Ltd

design	date	name	WAFER CONNECTOR
Review	date	model	WAFER-XHB2.54-□□PWZ-W
Approved	date		

Drawing number:	Proportion	1:1	unit	mm	gaps number	A4
-----------------	------------	-----	------	----	-------------	----