
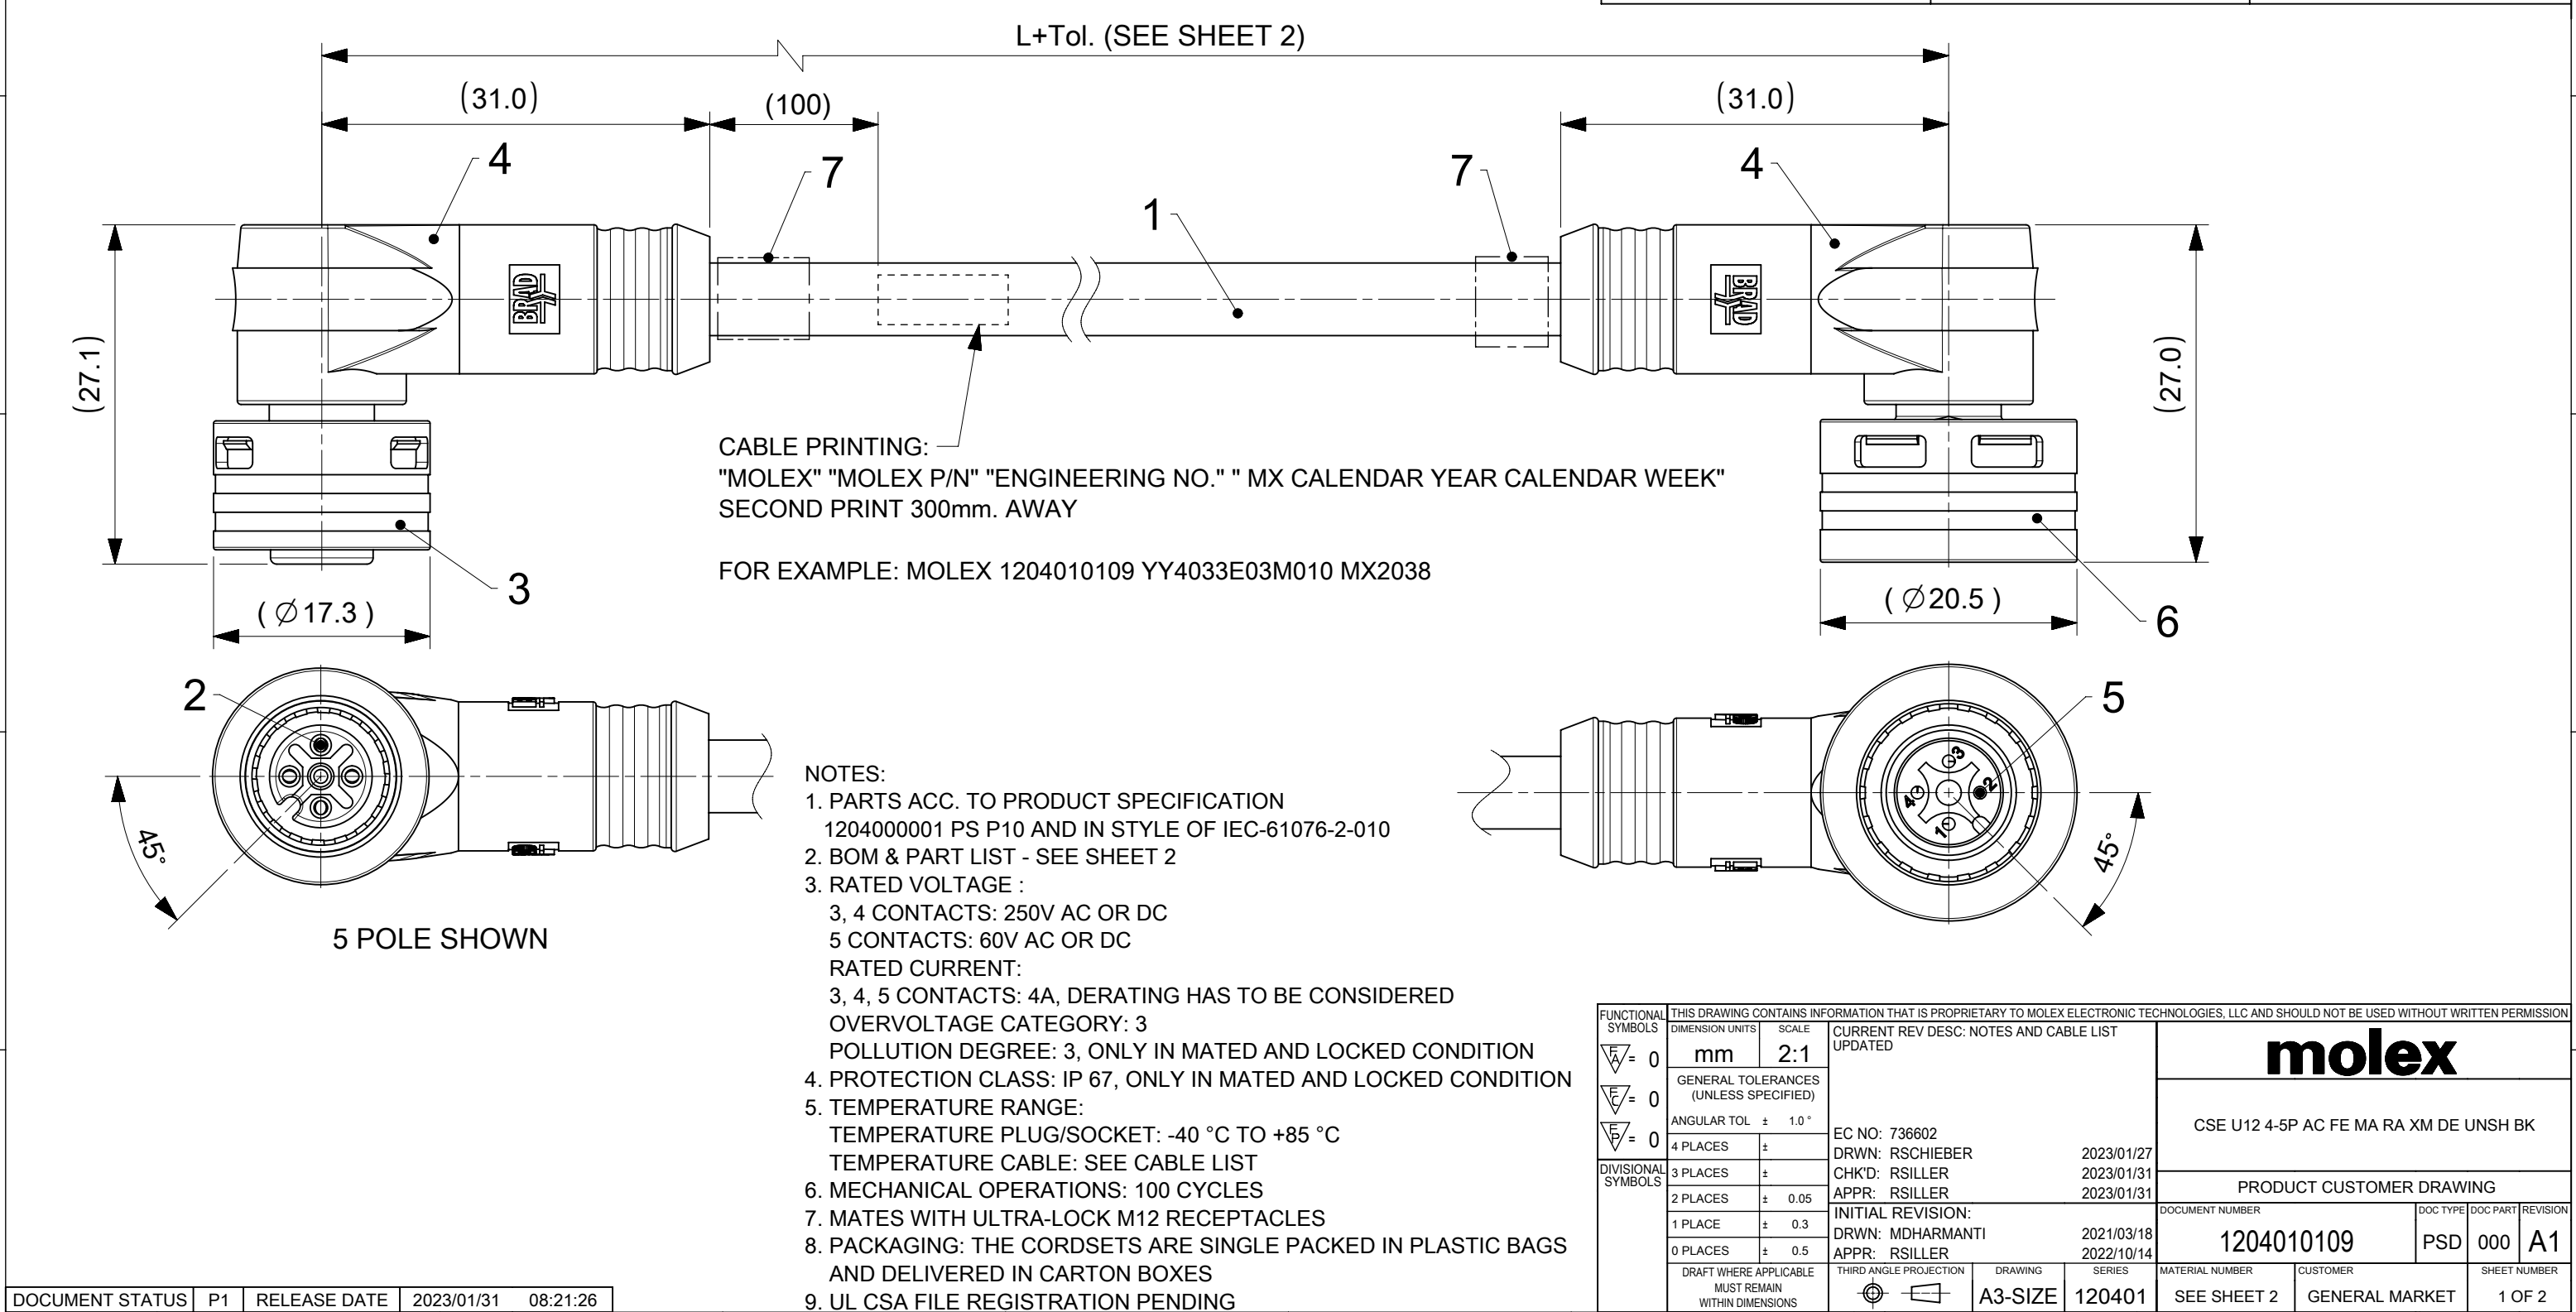


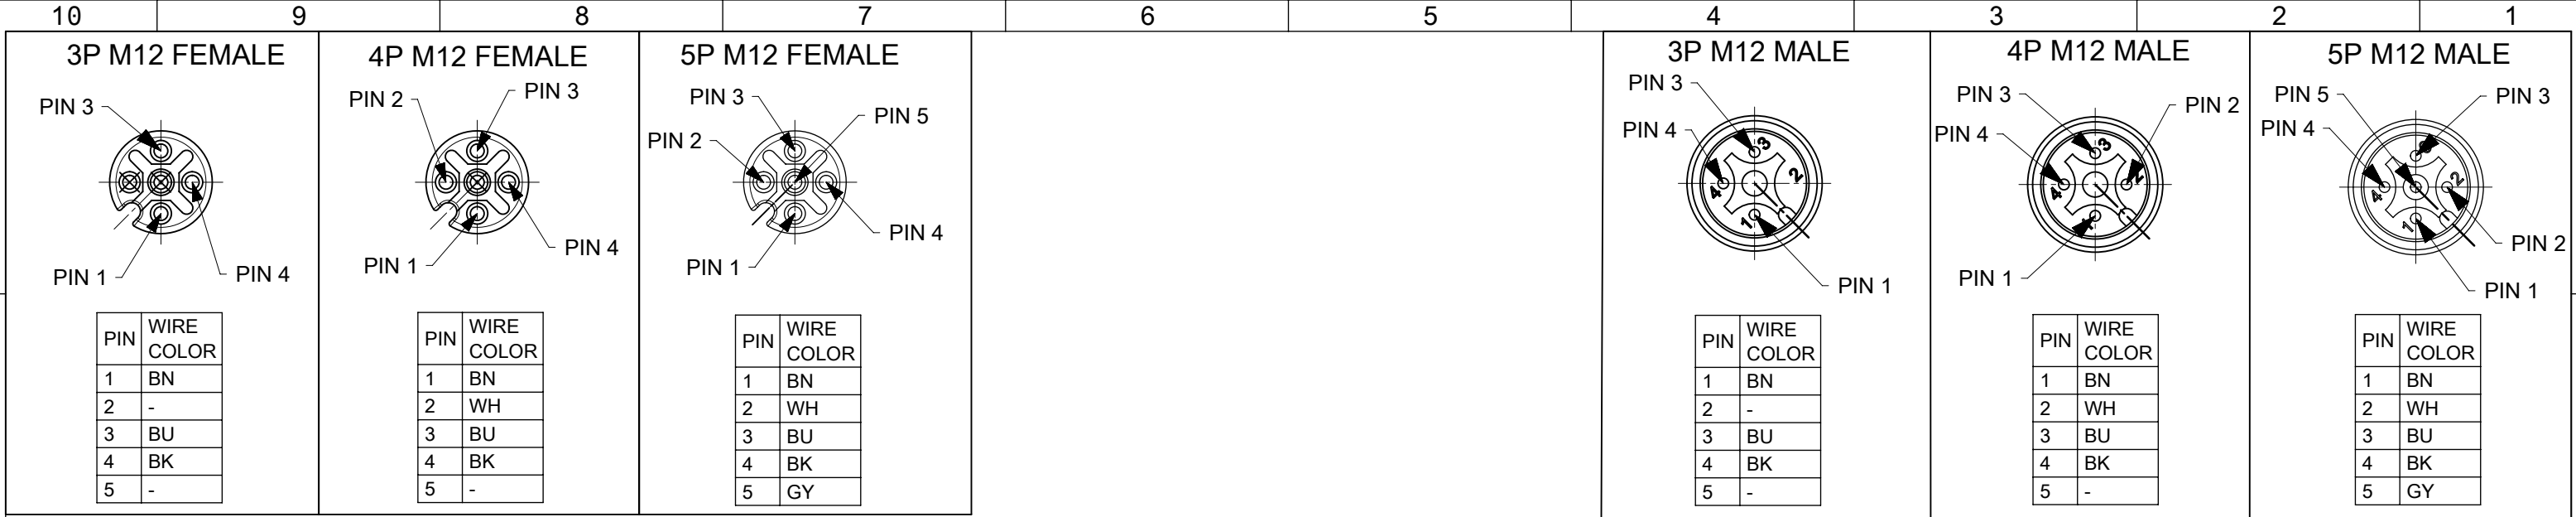


Y	Y	X	0	3	3	X	X	X	X	X	X	X	X	X
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

POLES:
3 = 3 POLES
4 = 4 POLES
5 = 5 POLES

CABLE:
E03 - 3/4/5x0.34 PVC BLACK
B30 - 3/4/5x0.34 WSOR BLACK
H09 - 3/4/5x0.34 PUR-LS0H BLACK

LENGTH:
EXAMPLE:
010 = 1 m
050 = 5 m
100 = 10 m

A = GREY
E = RED
G = BLACK
Y = YELLOW
H = STD. COLOUR WITH TWO
ID-TAG CARRIERS

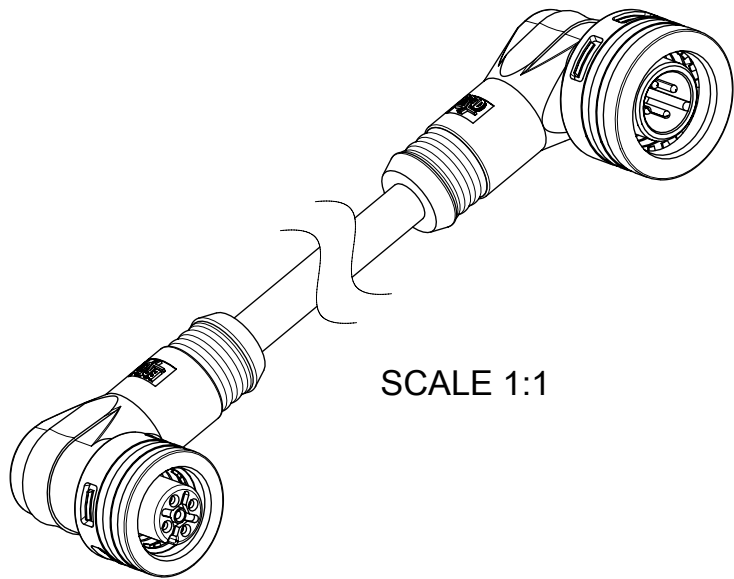

CABLE LIST

3P	4P	5P	CABLE TYPE	DESCRIPTION	MATERIAL	FINISH/COLOR	FIXED INSTALLATION *		FLEXIBLE INSTALLATION **		DRAG CHAIN	
							MIN.	MAX.	MIN.	MAX.	MIN.	MAX.
X			E03	CABLE PVC, BLK 3X0.34MM D4.9	PVC	BLACK	-30°C	+80°C	-10°C	+80°C	NOT SUITABLE	
	X			CABLE PVC, BLK 4X0.34MM D5.4								
		X		CABLE PVC, BLK 5X0.34MM(UL/CSA) D5.8								
X			B30	CABLE 3X0.34 TPU BK D4.80 TPE UNSH DCS	PUR WSOR	BLACK	-40°C	+90°C	-25°C	+80°C	-5°C	+60°C
	X			CABLE 4X0.34 TPU BK D5.10 TPE UNSH DCS								
		X		CABLE 5X0.34 TPU BK D5.50 TPE UNSH DCS								
X			H09	CABLE PUR;BLK 3X0.34MM-LSOH;UL D4.4	PUR-LS0H	BLACK	-40°C	+80°C	-25°C	+80°C	+5°C	+60°C
	X			CABLE PUR;BLK 4X0.34MM-LSOH;UL D4.7								
		X		CABLE PUR BLK 5X0.34MM LSZH UL D5.0								

PART LIST

MOLEX NO.	ENGINEERING NO.	LENGHT (mm)
1204010109	YY4033E03M010	1000
1204010110	YY4033E03M020	2000
1204010111	YY4033E03M050	5000
1204010112	YY4033E03M100	10000
1204010113	YY4033B30M010	1000
1204010114	YY4033B30M020	2000
1204010115	YY4033B30M050	5000
1204010116	YY4033B30M100	10000
1204010117	YY4033H09M010	1000
1204010118	YY4033H09M020	2000
1204010119	YY4033H09M050	5000
1204010120	YY4033H09M100	10000
1204010121	YY5033E03M010	1000
1204010122	YY5033E03M020	2000
1204010123	YY5033E03M050	5000
1204010124	YY5033E03M100	10000
1204010125	YY5033B30M010	1000
1204010126	YY5033B30M020	2000
1204010127	YY5033B30M050	5000
1204010128	YY5033B30M100	10000
1204010129	YY5033H09M010	1000
1204010130	YY5033H09M020	2000
1204010131	YY5033H09M050	5000
1204010132	YY5033H09M100	10000

BILL OF MATERIAL

3P	4P	5P	ITEM	QTY	DESCRIPTION	MATERIAL	FINISH/COLOR
X	X	X	1	-	CABLE	SEE CABLE LIST	SEE CABLE LIST
X	X	X	2	3/4/5	CONTACT 10 FE STA AU	BRASS	GOLD OVER NICKEL PLATED
X			3	1	PLG U12 3P AC FE PA UNSH	-	-
	X				PLG U12 4P AC FE PA UNSH		
		X			PLG U12 5P AC FE PA UNSH		
X	X	X	4	2	OVERMOLD	TPC	SEE MATRIX
X	X	X	5	3/4/5	CONTACT 10 MA STA NI AU	COPPER ALLOY	GOLD OVER NICKEL PLATED
X			6	1	PLG U12 3P AC MA PA UNSH WT	-	-
	X				PLG U12 4P AC MA PA UNSH WT		
		X			PLG U12 5P AC MA PA UNSH WT		
IF "H" IS IN MATRIX-END			7	2	I/D CARRIER DIA 4-7MMX30MM	PVC	TRANSPARENT

CABLE LENGTH TOLERANCES	
LENGTH	TOLERANCE
0m-1m	+40 mm
>1m-5m	+60 mm
>5m-10m	+80 mm
>10m-20m	+140 mm
>20m-30m	+160 mm
>30m	+1% length

FUNCTIONAL SYMBOLS F = 0 F = 0 F = 0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
	DIMENSION UNITS		SCALE		CURRENT REV DESC: NOTES AND CABLE LIST UPDATED						molex CSE U12 4-5P AC FE MA RA XM DE UNSH BK							
	mm		2:1															
	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 736602 DRWN: RSCHIEBER 2023/01/27 CHK'D: RSILLER 2023/01/31 APPR: RSILLER 2023/01/31						PRODUCT CUSTOMER DRAWING							
	ANGULAR TOL ± 1.0 °																	
	4 PLACES		±															
	3 PLACES		±															
	2 PLACES		± 0.05															
	1 PLACE		± 0.3		INITIAL REVISION: DRWN: MDHARMANTI 2022/03/18 APPR: RSILLER 2022/10/14						DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
	0 PLACES		± 0.5								1204010109		PSD		000		A1	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER				
						A3-SIZE		120401		SEE PART LIST		GENERAL MARKET		2 OF 2				