





(2,54mm) .100"

LCW SERIES

LCW-125-11-G-S-300

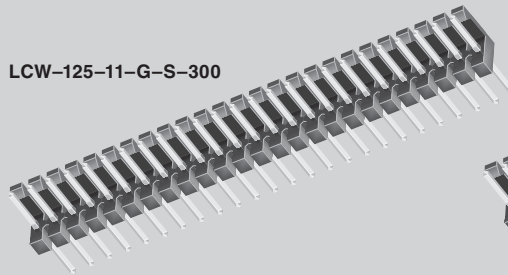

LCW-115-09-S-S-300-RE



FRICTION LOCK TERMINAL STRIPS

Mates with:
SSW, SSQ, ESW, ESQ,
IDSS

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?LCW

Insulator Material:
Black Glass Filled
Polyester

Terminal Material:
Phosphor Bronze

Plating:
Au or Sn over 50µ"

(1,27µm) Ni

Flammability Rating:
UL 94V-O

Insulation Resistance:
5000 MΩ @ 500 VDC

Operating Temp Range:
-55°C to 125°C with Gold

-55°C to 105°C with Tin

Withstanding Voltage:
1000 VRMS @ 60 Hz

Current Rating:
3 A

RoHS Compliant:
Yes

Processing:
Lead-Free Solderable:

Wave Only




LCW	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	POST HEIGHT	OPTION
01 thru 36 (36 positions standard)			-L = 10µ" (0,25µm) Gold on post, Matte Tin on tail	-S = Single Row	-XXX = "C" Specify "230" or "300" standard post length from chart below.	-RX = Right Angle (Specify from chart)	-LL = Locking Lead (N/A with Right Angle)
			-G = 10µ" (0,25µm) Gold on post, Gold flash on balance	-M = Locking Clip Removed From Each End	ALSO AVAILABLE Locking Socket see www.samtec.com?SSW (Body Style -P)	Two leads crimped in opposite directions on or near centerline. ("A"= .300" or less) N/A w/1 or 2 positions	-XX = Polarized
			-S = 30µ" (0,76µm) Gold on post, Matte Tin on tail				
			-T = Matte Tin				

Straight Pin Versions

LEAD STYLE	TAIL A	OAL B	POST C
* -07	(2,54) .100	(10,92) .430	
* -08	(5,08) .200	(13,46) .530	
-09	(10,16) .400	(18,54) .730	
-10	(12,70) .500	(21,08) .830	
-11	(15,24) .600	(23,62) .930	
-12	(17,78) .700	(26,16) 1.030	
-13	(22,86) .900	(31,24) 1.230	(5,84) .230
-14	(27,94) 1.100	(36,32) 1.430	
* -15	(7,62) .300	(16,00) .630	
* -16	(2,92) .115	(11,30) .445	
* -17	(3,81) .150	(12,19) .480	
* -19	(25,40) 1.000	(33,78) 1.330	
-20	(20,32) .800	(28,70) 1.130	
* -08	(3,30) .130	(13,46) .530	
-09	(8,38) .330	(18,54) .730	
-10	(10,92) .430	(21,08) .830	
-11	(13,46) .530	(23,62) .930	
-12	(16,00) .630	(26,16) 1.030	
-13	(21,08) .830	(31,24) 1.230	(7,62) .300
-14	(16,16) .636	(36,32) 1.430	
* -15	(5,84) .230	(16,00) .630	
-19	(23,62) .930	(33,78) 1.330	
-20	(18,54) .730	(28,70) 1.130	

Specify "LEAD STYLE" from chart.




*Available with -LL (Locking Lead) Option

Right Angle Versions

LEAD STYLE	-RA & -RR TAIL A	-RE TAIL A	-RP TAIL A	POST C
-09	(6,60) .260	(4,06) .160	(7,62) .300	
-10	(9,14) .360	(6,80) .260	(10,16) .400	
-11	(11,68) .460	(9,14) .360	(12,70) .500	
-12	(14,22) .560	(11,68) .460	(15,24) .600	
-13	(19,30) .760	(16,76) .660	(20,32) .800	(5,84) .230
-14	(24,38) .960	(21,84) .860	(25,40) 1.000	
-15	(4,06) .160	(1,52) .060	(5,08) .200	
-19	(21,84) .860	(19,30) .760	(22,86) .900	
-20	(16,76) .660	(14,22) .560	(17,78) .700	
-09	(4,83) .190	(2,29) .090	(5,84) .230	
-10	(7,37) .290	(4,83) .190	(8,38) .330	
-11	(9,91) .390	(7,37) .290	(10,92) .430	
-12	(12,45) .490	(9,91) .390	(13,46) .530	
-13	(17,53) .690	(14,99) .590	(18,54) .730	(7,62) .300
-14	(22,61) .890	(20,07) .790	(23,62) .930	
-15	(2,29) .090	-	(3,30) .130	
-19	(20,07) .790	(17,53) .690	(21,08) .830	
-20	(14,99) .590	(12,45) .490	(16,00) .630	

Specify "LEAD STYLE" from chart.



REGULAR RIGHT ANGLE

OPTION	x
-RA	(1,52) .060
-RE	(4,06) .160
-RP	(0,64) .025 MAX

REVERSE RIGHT ANGLE

OPTION	x
-RR	(1,52) .060
-PR	(0,64) .025 MAX

Note:
Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC SILICON VALLEY • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766
SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

[LCW-103-08-G-S-300-02](#) [LCW-106-08-S-S-300](#) [LCW-105-08-G-S-300](#) [LCW-110-08-G-S-300](#) [LCW-104-08-G-S-300](#)
[LCW-108-08-G-S-300](#) [LCW-110-08-G-S-300-LL](#) [LCW-107-08-G-S-300](#) [LCW-119-08-G-S-300](#) [LCW-106-08-G-S-300](#)
[LCW-102-08-G-S-300](#) [LCW-136-08-G-S-300-02](#) [LCW-114-08-G-S-300](#) [LCW-120-08-G-S-300](#) [LCW-116-08-G-S-300](#)
[LCW-103-08-G-S-300](#) [LCW-103-08-G-S-300-LL](#) [LCW-109-08-G-S-300](#) [LCW-108-08-G-S-300-LL](#) [LCW-112-08-G-S-](#)
[300](#) [LCW-121-08-G-S-300](#) [LCW-132-08-G-S-300](#) [LCW-112-08-G-S-300-LL](#) [LCW-136-08-G-S-300-LL](#) [LCW-103-15-T-](#)
[S-300](#) [LCW-102-07-L-S-230](#) [LCW-102-08-S-S-230](#) [LCW-102-09-T-S-230](#) [LCW-102-10-G-S-300](#) [LCW-110-14-T-S-](#)
[230](#) [LCW-116-15-G-S-300-RA](#) [LCW-120-08-L-S-300](#) [LCW-102-15-S-S-230-RA](#) [LCW-106-09-L-S-300](#) [LCW-109-10-T-](#)
[S-300](#) [LCW-105-07-L-S-230-04](#) [LCW-107-08-L-S-230](#) [LCW-102-09-G-S-300-PR](#) [LCW-103-09-G-S-300](#) [LCW-104-15-](#)
[T-M-300-RP](#) [LCW-104-15-T-S-300-RR](#) [LCW-136-09-T-S-230-RA](#) [LCW-136-10-T-S-230](#) [LCW-136-13-G-S-230-RA](#)
[LCW-136-15-S-S-230-RP](#) [LCW-136-20-G-S-230-RE](#) [LCW-103-08-G-S-230-01](#) [LCW-107-20-L-S-300](#) [LCW-108-08-S-](#)
[S-300](#) [LCW-111-09-T-S-300-RA](#) [LCW-136-08-T-S-300](#) [LCW-136-09-G-M-230-RP](#) [LCW-136-09-S-S-230](#) [LCW-120-](#)
[07-T-S-230-LL](#) [LCW-103-15-L-S-230-RR-02](#) [LCW-126-07-G-S-230](#) [LCW-136-15-L-S-300](#) [LCW-104-08-L-S-230](#)
[LCW-105-09-G-M-230-RE](#) [LCW-106-15-G-S-300-RR](#) [LCW-110-15-S-S-300-RP](#) [LCW-110-17-T-S-230](#) [LCW-116-15-L-](#)
[S-230-RR](#) [LCW-102-10-L-S-300](#) [LCW-116-15-T-S-230-RR](#) [LCW-116-09-S-S-230-RA](#) [LCW-116-09-T-S-230-RR](#)
[LCW-116-17-G-S-230](#) [LCW-107-08-L-S-230-07](#) [LCW-106-14-T-S-230](#) [LCW-106-14-T-S-230-RA](#) [LCW-102-08-S-M-](#)
[300](#) [LCW-103-10-L-M-300-PR](#) [LCW-104-15-S-S-230-RP](#) [LCW-106-08-L-S-300-LL](#) [LCW-109-09-T-S-300-03](#) [LCW-](#)
[110-07-H-S-230](#) [LCW-105-14-T-S-230](#) [LCW-127-08-T-S-230](#) [LCW-108-08-G-S-230-LL](#) [LCW-109-08-S-M-300](#) [LCW-](#)
[114-15-S-S-300-RP](#) [LCW-101-07-S-S-230](#) [LCW-106-08-L-S-230](#) [LCW-102-14-T-S-230](#) [LCW-102-14-T-S-230-RA](#)
[LCW-102-15-L-S-300-PR](#) [LCW-103-16-S-S-230](#) [LCW-104-09-G-S-300-PR](#) [LCW-110-14-T-S-230-RA](#) [LCW-118-07-T-](#)
[S-230-18](#) [LCW-102-09-G-S-230-PR](#) [LCW-102-15-T-S-230](#) [LCW-103-07-G-S-230-LL](#) [LCW-105-15-T-S-230-RA](#) [LCW-](#)
[110-09-G-S-230-RE-09](#) [LCW-102-09-G-S-230-RR](#) [LCW-103-09-G-S-300-RR](#) [LCW-103-12-G-S-300](#) [LCW-105-07-F-S-](#)
[230](#)