

**FLEX
STACK**

FW-10-04-L-D-440-150

FW-20-02-F-D-200-140

FW-40-02-F-D-425-075

FW-TH SERIES

THROUGH-HOLE MICRO BOARD STACKER

RI[®]
FILE NO. E111594

(1.27 mm)
.050" pitch

Variable
board spacing

FW  **NO. PINS PER ROW**  **LEAD STYLE**  **PLATING OPTION**  **D**  **STACKER HEIGHT**  **POST HEIGHT**  **OPTION**

02 thru 50

**Specify
LEAD
STYLE
from
chart**

-F
= Gold flash on post,
Matte Tin on tail

-L
= 10 μ" (0.25 μm)
Gold on post,
Matte Tin on tail

-G
= 10 μ" (0.25 μm)
Gold on post,
Gold flash on tail

—“XXX”
= Stacker
Height
(in inches)

Example:
-250
= (6.35 mm)

LEAD STYLE	TAIL (B)
-01	(1.14) .045
-02	(1.91) .075
-04	(2.29) .090





—“XXX”
= Post
Height
(in inches)

**(1.65 mm)
.065"
minimum**

Example:
-065
= (1.65 mm)
065"

-ES
= End Shroud
(-075 post
height only.
Mates only
with CLP.)
(5.46 mm)
.215" to
(15.49 mm)
.610"
stacker
height only,
9 pins/row
minimum

-EP
= End Shroud
with Guide
Post
(-075 post
height only.
Mates only
with CLP)
(5.46 mm)
.215" to
(15.49 mm)
.610" stacker
height only,
9 pins/row
minimum

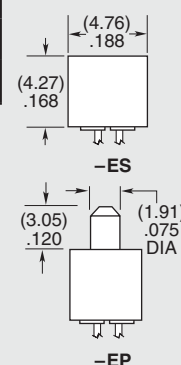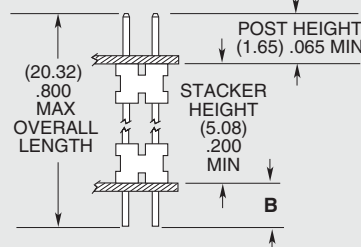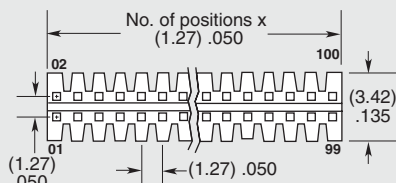

This Series is non-standard,
non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications.

*All parts within this catalog are built to Samtec's specifications.
Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.*

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[FW-02-04-G-D-320-075](#)