

Actuator

17-120355

Distribution by
DigiKey**DigiKey**<https://digikey.eao.com/p/17-120355>

Your product:



17-120355 Actuator

FRONT

Reflector:	Metal, polished chromium-plated, domed
Front form:	round
Front dimension:	Ø 9,5 mm

MOUNTING

Mounting cut-out:	Ø 8 mm
Design:	raised

OPERATING-/INDICATION PART

Illumination colour:	Red / Yellow
-----------------------------	--------------

ELECTRICAL CHARACTERISTICS

Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector
Operating voltage:	24 V DC
Lumi. Intensity:	11/10 mcd
Operation current:	22 mA ±15 %

MECHANICAL CHARACTERISTIC

Tightening torque:	Fixing nut max. 0.2 Nm
Weight:	0.005 kg
Terminal:	Plug-in terminal, 2 x 0.5 mm

AMBIENT CONDITION

IP Protection: IP40 front side, IP65 front side, according to IEC 60529

Storage temperature: - 25 °C ... + 80 °C

Operating temperature: - 20 °C ... + 60 °C

CERTIFICATE

Conformities: 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)

Approbations: UL


OTHER

Kind of illumination: Bi-colour-LED

Short Description: Actuator, Ø 8 mm, Ø 9,5 mm, round, Plug-in terminal, 2 x 0.5 mm, Red / Yellow


Hints: Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.

Dimension drawings:

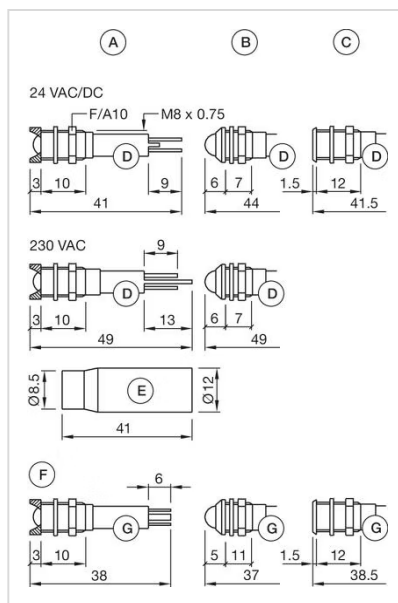


A = interior
B = exterior
C = superflat
D = Plug-in terminal 2.8 mm x 0.8 mm
E = Multi-colour
F = Protection tube
G = Plug-in terminal 2.0 mm x 0.5 mm

Component layouts:

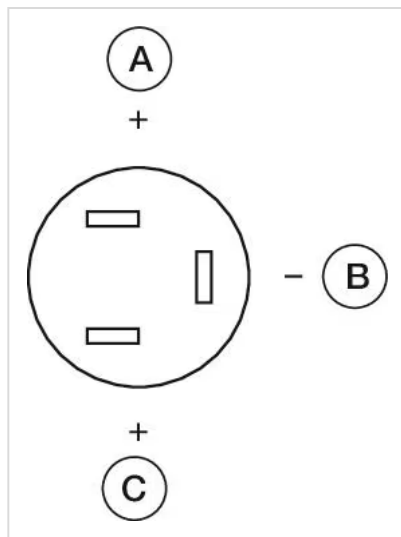

A = Red
B = common cathode
C = Yellow

Mounting cut-outs:

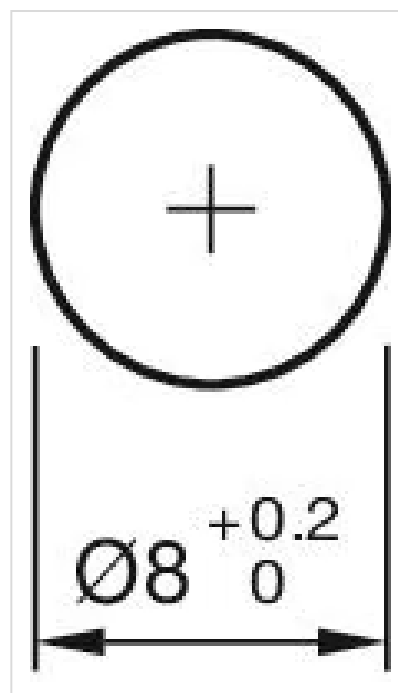

Wiring diagrams:

