
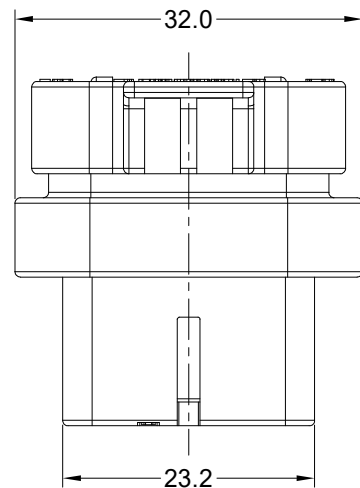
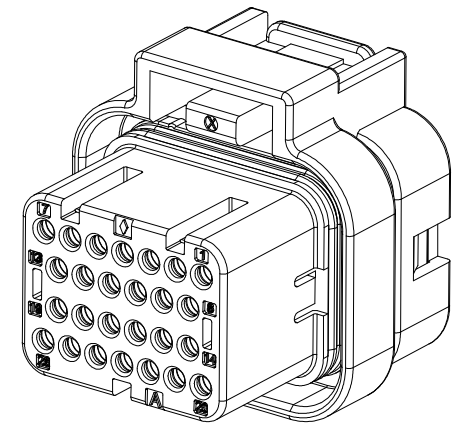
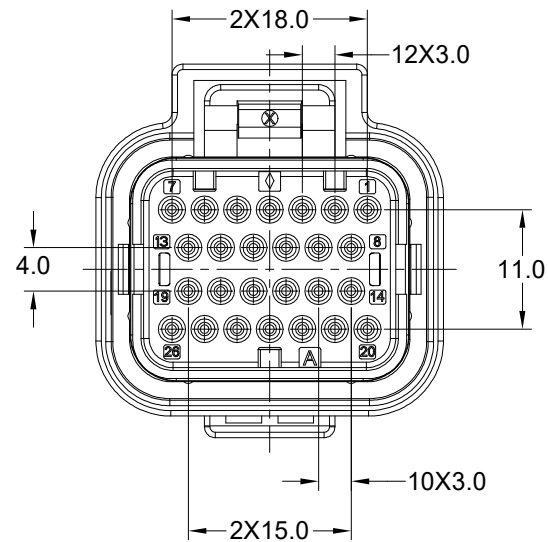
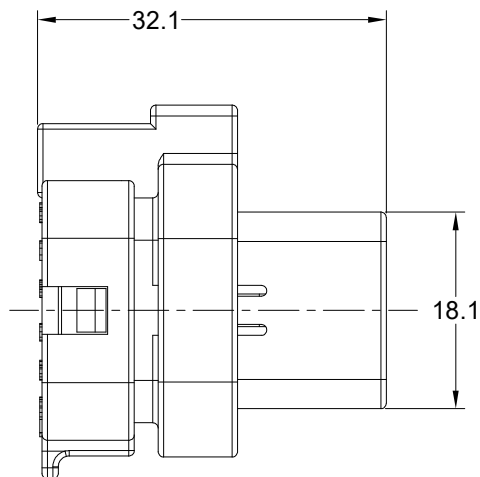


REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	RELEASE DRAWING	28/APR/23	LUCAS	TOMMY
A2	-	UPDATE THE END CAP	11/OCT/23	LUCAS	TOMMY

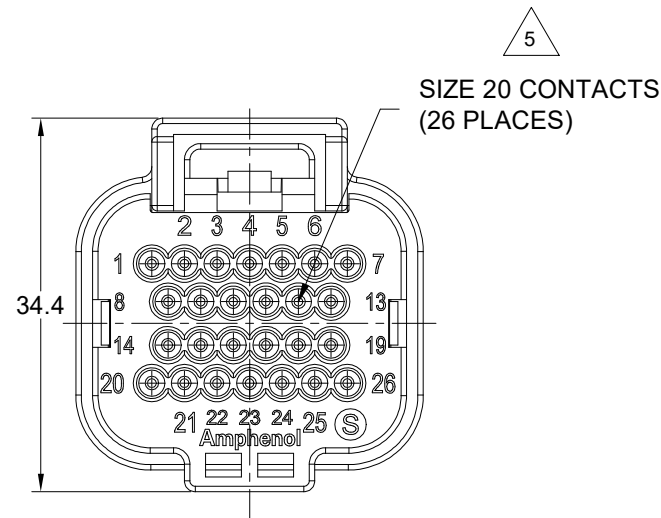


NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL:
HOUSING: THERMOPLASTIC; COLOR:BLACK
LOCATED BLOCK: THERMOPLASTIC; COLOR: BLACK
END CAP:THERMOPLASTIC; COLOR:BLACK
SEAL:SILICONE RUBBER
- SPECIFICATIONS:
2.1 CURRENT RATING: 7.5AMPS MAX
2.2 OPERATING TEMPERATURE: -55°C TO +125°C
2.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
2.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C
2.5 MOISTURE RESISTANCE: IP67&IP69K (MATED CONDITION)
2.6 MATING CYCLE DURABILITY: 500 CYCLES
2.7 RoHS COMPLIANT
- MATING PART: ATS13-26PX-* AND ATS15-26PX-* AND ATS04-26Px RECEPTACLE
(X = A,B KEYS ; * = ALL MODIFICATIONS)
- ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

5 CONTACT SIZE AND REAR SEAL WIRE RANGE

CONTACT SIZE	MIN. INSUL O.D.	MAX. INSUL O.D.	TYPICAL WIRE RANGE
20	1.12 mm (.044 in)	2.31 mm (.091 in)	18-28AWG (0.82-0.08mm ²)

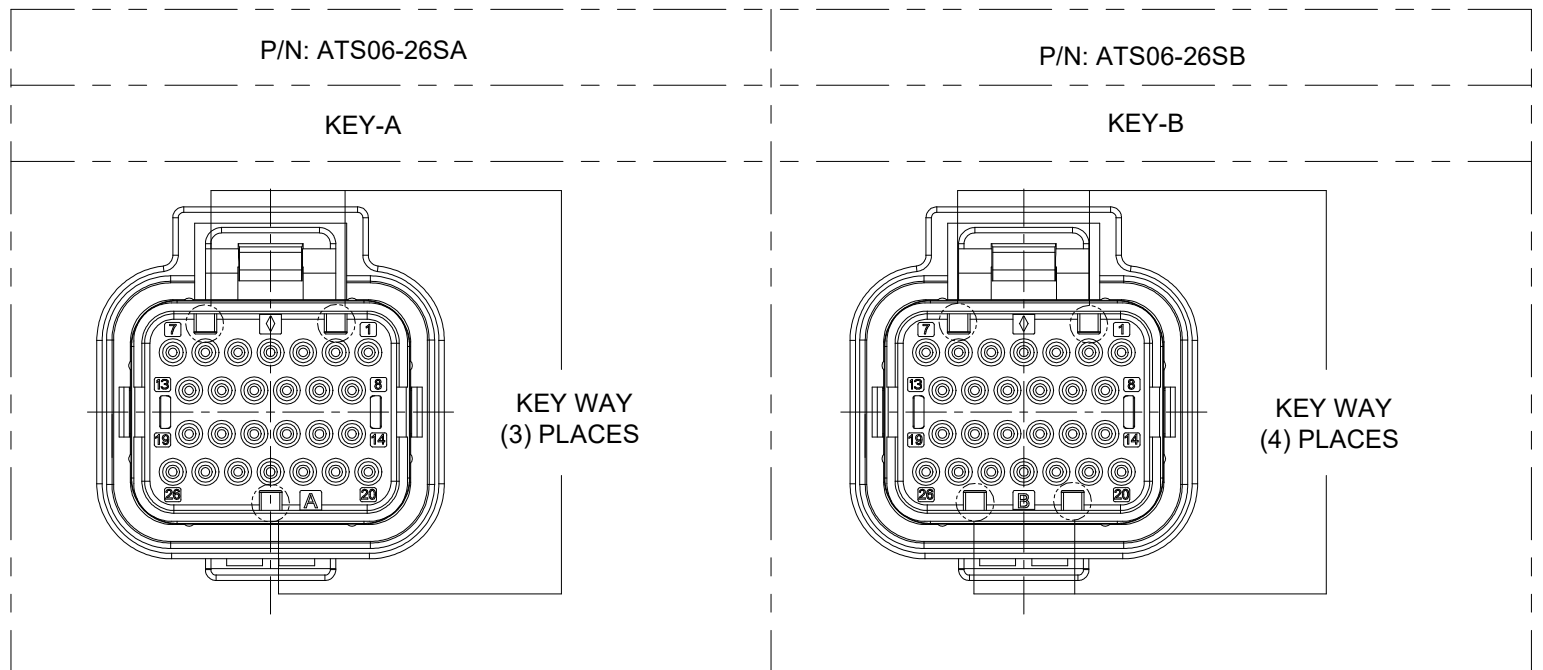

SEE P/N TABLE			
QUANTITY	PART NUMBER	DESCRIPTION	ITEM
MATERIALS LIST			
UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.08 3) Note reference =		SIGNATURES DRAWN: LUCAS CHECKED: ORION ENGINEER: APPROVAL: TOMMY CUSTOMER: DATE 11/OCT/23 12/OCT/23 16/OCT/23	Amphenol Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036
MATERIAL SPECIFICATIONS:		26 POS PLUG CONNECTOR, SOCKET, ATS	
PROCESS SPECIFICATIONS:		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.	
NEXT ASS'Y:		SIZE B TYPE C- DWG NO: ATS06-26Sx REVISION A2	SCALE: NONE SHEET 1 OF 1

TITLE: 26 POS PLUG CONNECTOR, SOCKET, ATS

DWG NO:

ATS06-26Sx

REV: A2

SH: 1

OF: 1

ATS Series™ - Contact Size 20 Options

Machined, Crimp Contacts				
Part Number		Contact Size (AWG)	Wire Range (mm²)	Plating
Male	Female			
MP18W23F	MS18W23F	18-20AWG	0.75-0.5 mm²	Gold Flash
MP18W23G10	MS18W23G10	18-20AWG	0.75-0.5 mm²	Gold 10µ"
MP18W23G15	MS18W23G15	18-20AWG	0.75-0.5 mm²	Gold 15µ"
MP18W23G30	MS18W23G30	18-20AWG	0.75-0.5 mm²	Gold 30µ"
MP20W23F	MS20W23F	20-22AWG	0.34-0.50 mm²	Gold Flash
MP20W23G5	MS20W23G5	20-22AWG	0.34-0.50 mm²	Gold 5µ"
MP20W23G10	MS20W23G10	20-22AWG	0.34-0.50 mm²	Gold 10µ"
MP20W23G15	MS20W23G15	20-22AWG	0.34-0.50 mm²	Gold 15µ"
MP20W23G30	MS20W23G30	20-22AWG	0.34-0.50 mm²	Gold 30µ"
MP24W23F	MS24W23F	24-26AWG	0.14-0.25 mm²	Gold Flash
MP24W23G5	MS24W23G5	24-26AWG	0.14-0.25 mm²	Gold 5µ"
MP24W23G10	MS24W23G10	24-26AWG	0.14-0.25 mm²	Gold 10µ"
MP24W23G15	MS24W23G15	24-26AWG	0.14-0.25 mm²	Gold 15µ"
MP24W23G30	MS24W23G30	24-26AWG	0.14-0.25 mm²	Gold 30µ"
MP28W23F	MS28W23F	28-30AWG	0.05-0.08 mm²	Gold Flash
MP28W23G5	MS28W23G5	28-30AWG	0.05-0.08 mm²	Gold 5µ"
MP28W23G10	MS28W23G10	28-30AWG	0.05-0.08 mm²	Gold 10µ"
MP28W23G15	MS28W23G15	28-30AWG	0.05-0.08 mm²	Gold 15µ"
MP28W23G30	MS28W23G30	28-30AWG	0.05-0.08 mm²	Gold 30µ"

Machined, Tooling	
Part Number	Description
MFX-3959	Hand Crimp Tool for Machined Contacts, Size 20
MFX-3960	Pneumatic Crimp Tool for Machined Contact, Size 20

Plating Options, All	
Symbol	Plating
T	Tin Plated (for Stamped & Formed Contacts)
S	Silver Plated 5Um (for Machined Contacts)
F	Gold Plated
G5	Gold Plated (Thickness 5µ")
G10	Gold Plated (Thickness 10µ")
G15	Gold Plated (Thickness 15µ")
G30	Gold Plated (Thickness 30µ")

Stamped & Formed , Crimp Contacts				
Part Number		Contact Size (AWG)	Wire Range (mm²)	Plating
Male	Female			
SP20W2F	SS20W2F	18-22AWG	0.34-0.50 mm²	Gold Flash
SP20W2G5	SS20W2G5	18-22AWG	0.34-0.50 mm²	Gold 5µ"
SP20W2G10	SS20W2G10	18-22AWG	0.34-0.50 mm²	Gold 10µ"
SP20W2G15	SS20W2G15	18-22AWG	0.34-0.50 mm²	Gold 15µ"
SP20W2G30	SS20W2G30	18-22AWG	0.34-0.50 mm²	Gold 30µ"
SP24W2F	SS24W2F	24-26AWG	0.14-0.25 mm²	Gold Flash
SP24W2G5	SS24W2G5	24-26AWG	0.14-0.25 mm²	Gold 5µ"
SP24W2G10	SS24W2G10	24-26AWG	0.14-0.25 mm²	Gold 10µ"
SP24W2G15	SS24W2G15	24-26AWG	0.14-0.25 mm²	Gold 15µ"
SP24W2G30	SS24W2G30	24-26AWG	0.14-0.25 mm²	Gold 30µ"
SP28W2F	SS28W2F	28-30AWG	0.05-0.08 mm²	Gold Flash
SP28W2G5	SS28W2G5	28-30AWG	0.05-0.08 mm²	Gold 5µ"
SP28W2G10	SS28W2G10	28-30AWG	0.05-0.08 mm²	Gold 10µ"
SP28W2G15	SS28W2G15	28-30AWG	0.05-0.08 mm²	Gold 15µ"
SP28W2G30	SS28W2G30	28-30AWG	0.05-0.08 mm²	Gold 30µ"

Stamped & Formed, Tooling	
Part Number	Description
MFX-3958	Hand Tool, Stamped & Formed Contact, Size 20
MFX-3957	Crimp Die for Stamped & Formed Contact, Size 20

Tooling, All	
Part Number	Description
AT13-204-2005	Sealing Plug, Size 20
ATRT-100	Contact and Wedgelock Extraction Tool
FT-ATS26P	Installation Fixture for ATS04-26P (Required)
ISRT20	Contact Insertion Tool, Size 20
QXRT20-ATS26P	Contact Extraction Tool, Size 20 (Used with ATS04 and ATS06)

Standard Quantity Order Options	
Machined	Bulk Package, 500 Pieces
Stamped & Formed	Reel, 3000 Pieces