

VZH Series

Features

- $4\phi \sim 18\phi$, 105°C, 2,000 ~ 5,000 hours assured
- Large capacitance with ultra low impedance capacitors
- Designed for surface mounting on high density PC board
- RoHS Compliance



Marking color: Black

Specifications

Items	Performance																																									
Category Temperature Range	-55℃ ~ +105℃																																									
Capacitance Tolerance	±20% (at 120Hz, 20℃)																																									
Leakage Current (at 20℃)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF, V = rated DC working voltage in V																																									
Tanδ (at 120Hz, 20℃)	<table><tr><td>Rated Voltage</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>80</td><td>100</td></tr><tr><td>Tanδ (max)</td><td>0.30</td><td>0.26</td><td>0.22</td><td>0.16</td><td>0.13</td><td>0.10</td><td>0.08</td><td>0.08</td><td>0.07</td></tr></table> When the capacitance exceeds 1,000μF, 0.02 shall be added every 1,000μF increase.										Rated Voltage	6.3	10	16	25	35	50	63	80	100	Tanδ (max)	0.30	0.26	0.22	0.16	0.13	0.10	0.08	0.08	0.07												
Rated Voltage	6.3	10	16	25	35	50	63	80	100																																	
Tanδ (max)	0.30	0.26	0.22	0.16	0.13	0.10	0.08	0.08	0.07																																	
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below. <table><tr><td colspan="2">Rated Voltage</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>80</td><td>100</td></tr><tr><td rowspan="2">Impedance Ratio</td><td>Z(-25℃)/Z(+20℃)</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z(-55℃)/Z(+20℃)</td><td>8</td><td>5</td><td>4</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td></tr></table>										Rated Voltage		6.3	10	16	25	35	50	63	80	100	Impedance Ratio	Z(-25℃)/Z(+20℃)	4	3	2	2	2	2	2	2	2	Z(-55℃)/Z(+20℃)	8	5	4	3	3	3	3	3	3
Rated Voltage		6.3	10	16	25	35	50	63	80	100																																
Impedance Ratio	Z(-25℃)/Z(+20℃)	4	3	2	2	2	2	2	2	2																																
	Z(-55℃)/Z(+20℃)	8	5	4	3	3	3	3	3	3																																
Endurance	<table><tr><td>Test Time</td><td>2,000 Hrs for ϕ D ≤ 6.3mm & 8×6.5L & 10 ϕ ×7.7L; 5,000 Hrs for ϕ D ≥ 8mm</td></tr><tr><td>Capacitance Change</td><td>Within ±30% of initial value</td></tr><tr><td>Tanδ</td><td>Less than 300% of specified value</td></tr><tr><td>Leakage Current</td><td>Within specified value</td></tr></table> * The above specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage applied for 2,000 ~ 5,000 hours at 105℃.										Test Time	2,000 Hrs for ϕ D ≤ 6.3mm & 8×6.5L & 10 ϕ ×7.7L; 5,000 Hrs for ϕ D ≥ 8mm	Capacitance Change	Within ±30% of initial value	Tanδ	Less than 300% of specified value	Leakage Current	Within specified value																								
Test Time	2,000 Hrs for ϕ D ≤ 6.3mm & 8×6.5L & 10 ϕ ×7.7L; 5,000 Hrs for ϕ D ≥ 8mm																																									
Capacitance Change	Within ±30% of initial value																																									
Tanδ	Less than 300% of specified value																																									
Leakage Current	Within specified value																																									
Shelf Life Test	<table><tr><td>Test Time</td><td>1,000 Hrs</td></tr><tr><td>Capacitance Change</td><td>Within ±30% of initial value</td></tr><tr><td>Tanδ</td><td>Less than 300% of specified value</td></tr><tr><td>Leakage Current</td><td>Within specified value</td></tr></table> * The above specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 105℃ without voltage applied.										Test Time	1,000 Hrs	Capacitance Change	Within ±30% of initial value	Tanδ	Less than 300% of specified value	Leakage Current	Within specified value																								
Test Time	1,000 Hrs																																									
Capacitance Change	Within ±30% of initial value																																									
Tanδ	Less than 300% of specified value																																									
Leakage Current	Within specified value																																									
Ripple Current and Frequency Multipliers	<table><tr><td>Frequency(Hz)</td><td>50, 60</td><td>120</td><td>1k</td><td>10k up</td></tr><tr><td>Multiplier</td><td>0.60</td><td>0.70</td><td>0.85</td><td>1.0</td></tr></table>										Frequency(Hz)	50, 60	120	1k	10k up	Multiplier	0.60	0.70	0.85	1.0																						
Frequency(Hz)	50, 60	120	1k	10k up																																						
Multiplier	0.60	0.70	0.85	1.0																																						

Diagram of Dimensions

Fig. 1


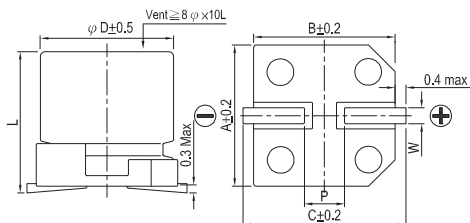


Fig. 2

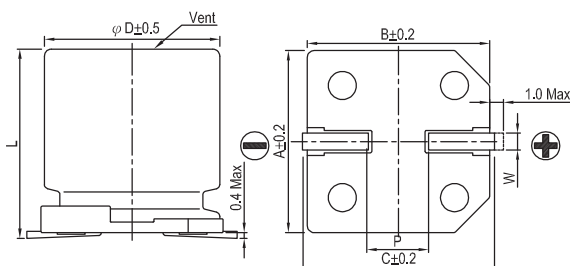

Lead Spacing and Diameter

Unit: mm




φD	L	A	B	C	W	P ± 0.2	Fig. No.
4	5.7 ± 0.3	4.3	4.3	5.1	0.5 ~ 0.8	1.0	1
5	5.7 ± 0.3	5.3	5.3	5.9	0.5 ~ 0.8	1.5	1
6.3	5.7 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0	1
6.3	7.7 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0	1
8	6.5 ± 0.3	8.4	8.4	9.0	0.5 ~ 0.8	2.3	1
8	10 ± 0.5	8.4	8.4	9.0	0.7 ~ 1.1	3.1	1
10	7.7 ± 0.3	10.4	10.4	11.0	0.7 ~ 1.3	4.7	1
10	10 ± 0.5	10.4	10.4	11.0	0.7 ~ 1.3	4.7	1
12.5	13.5 ± 0.5	13.0	13.0	13.7	1.1 ~ 1.4	4.4	2
12.5	16 ± 0.5	13.0	13.0	13.7	1.1 ~ 1.4	4.4	2
16	16.5 ± 0.5	17.0	17.0	18.0	1.1 ~ 1.4	6.4	2
16	21.5 ± 0.5	17.0	17.0	18.0	1.1 ~ 1.4	6.4	2
18	16.5 ± 0.5	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2
18	21.5 ± 0.5	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2

Marking

$\phi D \leq 6.3\text{mm}$

$\phi D = 8 \sim 10\text{mm}$

$\phi D \geq 12.5\text{mm}$



Dimension: $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 100k Hz, 105°C

Impedance: $\Omega/$ at 100k Hz, 20°C

Dimension and Permissible Ripple Current

V. DC		6.3V (0J)			10V (1A)			16V (1C)			25V (1E)			35V (1V)			50V (1H)		
μF	Contents	φ D×L	Imp.	mA	φ D×L	Imp.	mA	φ D×L	Imp.	mA	φ D×L	Imp.	mA	φ D×L	Imp.	mA	φ D×L	Imp.	mA
1	010																4×5.7	2.9	60
2.2	2R2																4×5.7	2.9	60
3.3	3R3																4×5.7	2.9	60
4.7	4R7													4×5.7	1.35	80	5×5.7	1.52	85
10	100							4×5.7	1.35	80	4×5.7	1.35	80	5×5.7	0.80	150	6.3×5.7	0.88	165
22	220	4×5.7	1.35	80	4×5.7	1.35	80	5×5.7	0.80	150	5×5.7	0.80	150	6.3×5.7	0.44	230	6.3×5.7	0.88	165
33	330	4×5.7	1.35	80	5×5.7	0.80	150	6.3×5.7	0.44	230	6.3×5.7	0.44	230	6.3×5.7	0.44	230	6.3×7.7	0.68	185
47	470	5×5.7	0.80	150	6.3×5.7	0.44	230	6.3×5.7	0.44	230	6.3×5.7	0.44	230	6.3×5.7	0.44	230	6.3×7.7 8×6.5	0.68 0.68	185 185
68	680													8×6.5	0.36	280	8×10	0.34	369
100	101	6.3×5.7	0.44	230	6.3×5.7	0.44	230	6.3×5.7	0.44	230	6.3×7.7 8×6.5	0.36 0.36	280 280	8×10	0.17	450	8×10 10×10	0.34 0.18	369 553
150	151	6.3×5.7	0.44	230	6.3×5.7	0.44	230	6.3×7.7 8×6.5	0.36 0.36	280 280	8×10	0.17	450	8×10 10×7.7	0.17 0.17	450 450	10×10	0.18	553
220	221	6.3×7.7	0.36	280	6.3×7.7 8×6.5	0.36 0.36	280 280	6.3×7.7	0.36	280	8×10 10×7.7	0.17 0.17	450 450	10×10	0.09	670	12.5×13.5	0.12	650
330	331	8×6.5 8×10	0.36 0.17	280 450	8×10 10×7.7	0.17 0.17	450 450	8×10 10×7.7	0.17 0.17	450 450	8×10	0.17	450	10×10 12.5×13.5	0.090 0.070	670 820	12.5×13.5	0.12	650
470	471	8×10 10×7.7	0.17 0.17	450 450	8×10 10×7.7	0.17 0.17	450 450	8×10 10×10	0.17 0.09	450 670	10×10	0.09	670	12.5×16	0.060	950	16×16.5	0.073	1,000
680	681	8×10 10×7.7	0.17 0.17	450 450	10×10	0.09	670	10×10	0.09	670	12.5×13.5	0.070	820	12.5×16	0.060	950	16×16.5	0.073	1,000
1,000	102	8×10	0.17	450	10×10	0.09	670	12.5×13.5	0.070	820	12.5×16	0.060	950	16×16.5	0.054	1,260	18×16.5	0.066	1,500
1,500	152	10×10	0.09	670	12.5×13.5	0.070	820	12.5×16	0.060	950	16×16.5	0.054	1,260	18×16.5 16×21.5	0.048 0.038	1,500 1,630	18×21.5	0.05	1,620
2,200	222	12.5×13.5	0.070	820	12.5×16	0.060	950	16×16.5	0.054	1,260	16×16.5	0.054	1,260	18×21.5	0.038	1,750			
3,300	332	12.5×16	0.060	950	16×16.5	0.054	1,260	16×16.5 16×21.5	0.054 0.038	1,260 1,630	18×16.5 16×21.5 18×21.5	0.048 0.038 0.038	1,500 1,630 1,750						
4,700	472	16×16.5	0.054	1,260	16×16.5	0.054	1,260	18×16.5 16×21.5	0.048 0.038	1,500 1,630									
6,800	682	18×16.5 16×21.5	0.048 0.038	1,500 1,630	18×16.5 16×21.5	0.048 0.038	1,500 1,630												
8,200	822	18×16.5 16×21.5	0.048 0.038	1,500 1,630	18×21.5	0.038	1,750												



Dimension: $\phi D \times L$ (mm)

Ripple Current: mA/rms at 100k Hz, 105°C

Impedance: Ω / at 100k Hz, 20°C

Dimension and Permissible Ripple Current

V. DC		63V (1J)			80V (1K)			100V (2A)		
μF	Contents	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA
4.7	4R7	5×5.7	1.90	70						
10	100	6.3×5.7	1.20	130						
22	220	6.3×7.7	0.90	150	8×10	1.3	130	8×10	1.3	130
33	330	8×10	0.50	280	8×10	1.3	130	10×10	0.7	200
47	470	8×10	0.50	280	10×10	0.7	200	10×10	0.7	200
100	101	10×10	0.25	450	10×10	0.7	200	12.5×13.5	0.32	450
150	151	12.5×13.5	0.15	700	12.5×13.5	0.32	450	12.5×16	0.26	550
220	221	12.5×13.5	0.15	700	12.5×16	0.26	550	16×16.5 18×21.5	0.17 0.15	650 950
330	331	16×16.5	0.082	900	16×16.5	0.17	650	18×16.5 16×21.5	0.15 0.15	850 900
470	471	16×16.5	0.082	900	16×21.5	0.15	900	18×21.5	0.15	950
680	681	18×16.5 16×21.5	0.080 0.080	1,150 1,150	18×21.5	0.15	950			
1,000	102	18×21.5	0.06	1,250						

Part Numbering System

VZH Series	470 μF	$\pm 20\%$	6.3V	Carrier Tape	8 $\phi \times 10L$	Pb-free and PET coating case
VZH	471	M	0J	TR	-	0810
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Package Type	Terminal Type	Case size
						Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (SMD Type)" on page 15.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lelon:

VZH-100M1CTR-0406	VZH-100M1ETR-0406	VZH-100M1JTR-0606	VZH-100M1VTR-0506	VZH-101M0JTR-0606
VZH-101M1ATR-0606	VZH-101M1CTR-0606	VZH-220M1ETR-0506	VZH-220M1HTR-0606	VZH-4R7M1VTR-0406
VZH-470M1ETR-0606	VZH-470M1HTR-0607	VZH-470M1JTR-0810	VZH-470M1VTR-0606	VZH-470M2ATR-1010
VZH-101M1ETR-0607	VZH-101M1HTR-0810	VZH-101M1JTR-1010	VZH-101M1VTR-0810	VZH-102M1ATR-1010
VZH-221M1CTR-0607	VZH-221M1ETR-0810	VZH-221M1HTR-1010	VZH-221M1JTR-1313	VZH-331M1ETR-0810
VZH-331M1HTR-1313	VZH-471M0JTR-0810	VZH-471M1ATR-0810	VZH-471M1CTR-0810	VZH-471M1ETR-1010
VZH-471M1JTR-1616	VZH-681M1ATR-1010	VZH-010M1HTR-0406	VZH-100M1HTR-0606	VZH-101M1HTR-1010
VZH-101M1KTR-1010	VZH-101M1KTR-1313	VZH-101M2ATR-1313	VZH-102M0JTR-0810	VZH-102M1CTR-1313
VZH-102M1ETR-1316	VZH-102M1VTR-1616	VZH-151M0JTR-0606	VZH-151M1ATR-0606	VZH-151M1CTR-0607
VZH-151M1ETR-0810	VZH-151M1HTR-1010	VZH-151M1JTR-1313	VZH-151M1KTR-1313	VZH-151M1VTR-0810
VZH-151M2ATR-1316	VZH-151M2ATR-1616	VZH-152M0JTR-1010	VZH-152M1ATR-1313	VZH-152M1CTR-1316
VZH-152M1ETR-1616	VZH-220M0JTR-0406	VZH-220M1ATR-0406	VZH-220M1CTR-0506	VZH-220M1JTR-0607
VZH-220M1VTR-0606	VZH-221M0JTR-0607	VZH-221M1VTR-1010	VZH-222M0JTR-1313	VZH-222M1ATR-1316
VZH-222M1CTR-1616	VZH-222M1ETR-1616	VZH-2R2M1HTR-0406	VZH-330M0JTR-0406	VZH-330M1ATR-0506
VZH-330M1CTR-0606	VZH-330M1ETR-0606	VZH-330M1HTR-0607	VZH-330M1JTR-0810	VZH-330M1VTR-0606
VZH-331M0JTR-0810	VZH-331M1ATR-0810	VZH-331M1CTR-0810	VZH-331M1JTR-1616	VZH-331M1KTR-1616
VZH-331M1VTR-1313	VZH-332M0JTR-1316	VZH-332M1ATR-1616	VZH-332M1CTR-1616	VZH-3R3M1HTR-0406
VZH-470M0JTR-0506	VZH-470M1ATR-0606	VZH-470M1CTR-0606	VZH-470M1KTR-1010	VZH-471M1CTR-1010
VZH-471M1HTR-1616	VZH-471M1VTR-1316	VZH-472M0JTR-1616	VZH-472M1ATR-1616	VZH-4R7M1HTR-0506
VZH-4R7M1JTR-0506	VZH-680M1HTR-0810	VZH-681M0JTR-0810	VZH-681M1CTR-1010	VZH-681M1ETR-1313