



**PennEngineering**  
**Corporate Headquarters – Danboro, PA**

5190 Old Easton Rd.

Danboro, PA 18916

**Phone:** 215-766-8853

**Toll-Free Phone:** 1-800-237-4736 (U.S. only)

**Email:** [info@pemnet.com](mailto:info@pemnet.com)

**Website:** [www.pemnet.com](http://www.pemnet.com)

---


**Part # HFLH-032-8ZI, Type HFLH™ Hard Panel Studs - Unified**

---

- Installs into thinner, harder, high strength steel materials (high strength steel sheets up to 700 MPa maximum ultimate tensile)
- Allows overall weight reduction for all vehicles
- Provides lower installed cost

**Compare to other thin sheet fastening devices:**


- Addresses environmental concerns
- Lighter weight
- Close to edge of panel mounting
- No embossing required
- Hardened stud material provides stronger thread strength
- Can be installed automatically using press or in-die technology

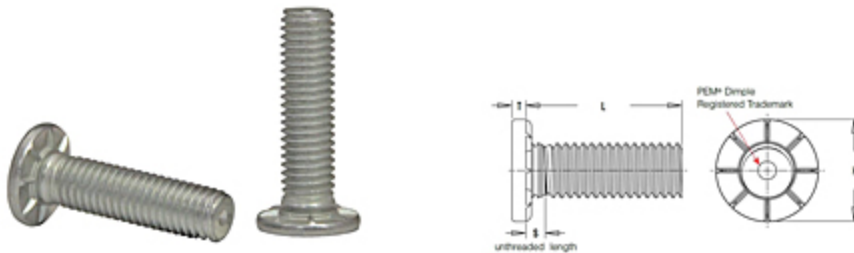

Specifications

<b>Thread Size</b>	.190-32 (#10-32)
<b>Thread Code</b>	032
<b>Length Code</b>	8

<b>Min. Sheet Thickness</b>	.040 in
<b>Hole Size in Sheet + .005 - .000</b>	.190 in
<b>L - Length ± .015</b>	.500 in
<b>H ± .01</b>	.357 in
<b>S Max.<sup>1</sup></b>	.102 in
<b>T Max.</b>	.048 in
<b>Max. Hole in Attached Parts</b>	.280 in
<b>Min. Dist. Hole C/L to Edge</b>	.360 in
<b>Tensile strength</b>	120 ksi
<b>For Use in Sheet Hardness<sup>2</sup></b>	HRB 96 / HB 216 or Less
<b>Thread Specification</b>	External, ASME B1.13M, 6g B1.1, 2A / ASME
<b>Fastener Material</b>	Heat-Treated Alloy Steel
<b>Standard Finish</b>	Zinc plated per SC1 (5µm), Type ASTM B633, III, colorless
<b>CAD Supplier</b>	PennEngineering® (PEM®)



<sup>1</sup> Threads are gageable to within 2 pitches of the "S" Max. dimension. A class 3B/5H maximum material commercial nut shall pass up to the "S" Max. dimension.

<sup>2</sup> HRB - Hardness Rockwell "B" Scale. HB - Hardness Brinell