



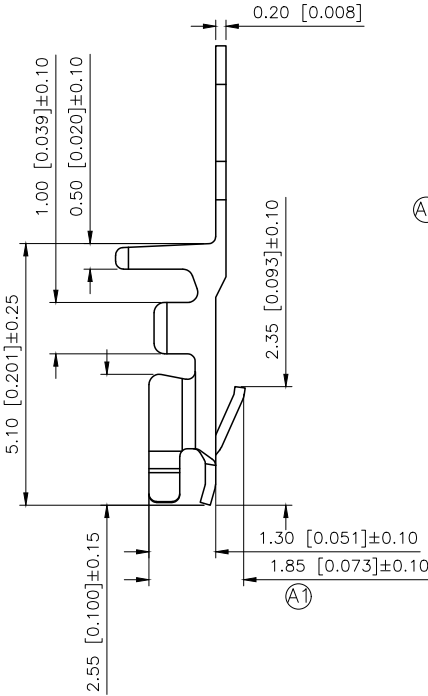


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A	(A1)X2	尺寸变更, 图面升级整理图面	2025.05.14	阿树

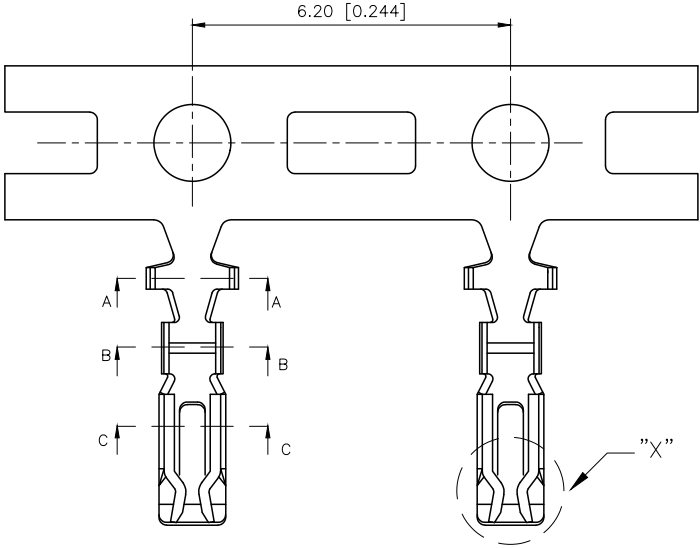


- SPECIFICATIONS
- Voltage rating:350V AC/DC
 - Current rating:4A AC/DC
 - Withstanding Voltage:1700V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤30mΩ
 - After environmental testing:≤20mΩ

PART NO.:

X1800 I-P SN
① ② ③ ④

- ①Series Number.
②Category: T-terminal
③Material: P-Phosphor bronze
④Planting style:SN-Bright tin plating

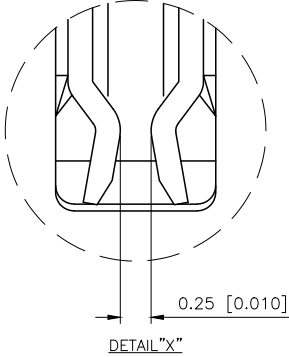

X1800T-PSN	Phosphor Bronze	AWG#28-30	1.8mm(Max)	Stamping Before plating:30u"MIN.Ni;70u"Sn	X1800H
PART NO	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:	
UNIT:	mm/in
SIZE:	A4

MODEL TYPE: 2.54mm Crimp Style Connector
PART NO.: X1800T-PSN
DWG NO.:

SCALE	PAGE	REVISION
N/A	1/1	A1