


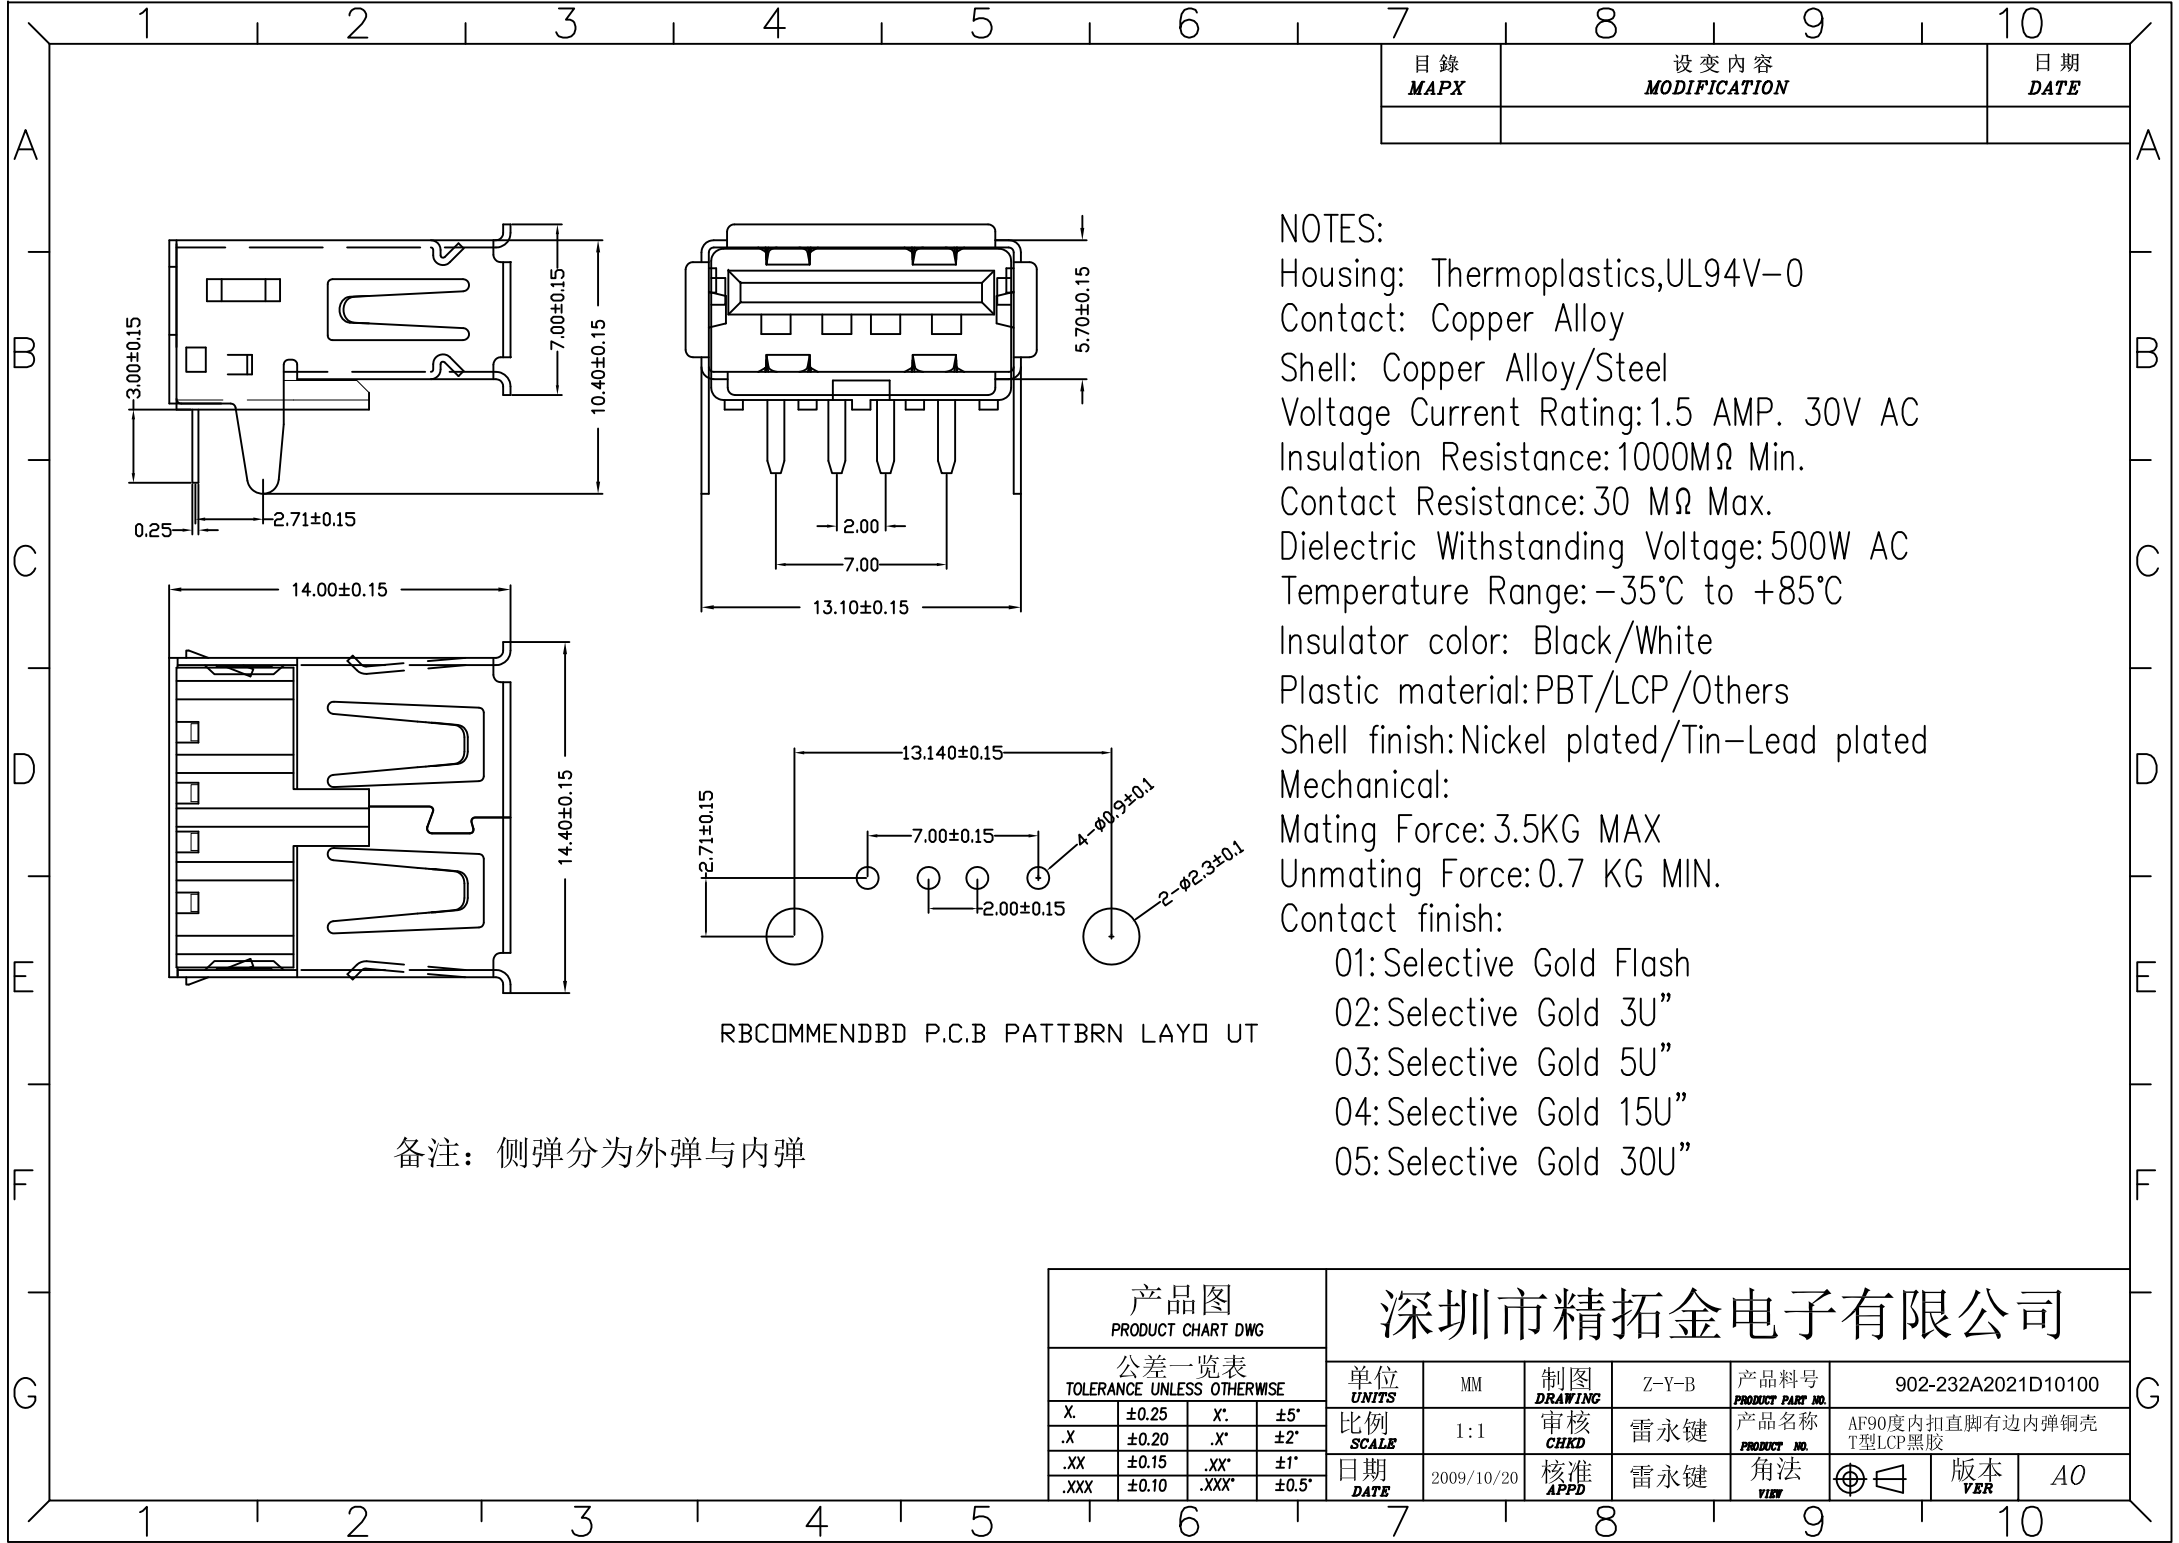

目錄 MAPX	設 變 內 容 MODIFICATION	日 期 DATE

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000MΩ Min.

Contact Resistance:30 MΩ Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:-35℃ to +85℃

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin-Lead plated

Mechanical:

Mating Force:3.5KG MAX

Unmating Force:0.7 KG MIN.

Contact finish:

01:Selective Gold Flash

02:Selective Gold 3U"

03:Selective Gold 5U"

04:Selective Gold 15U"

05:Selective Gold 30U"

备注：侧弹分为外弹与内弹

产 品 图 PRODUCT CHART DWG				深 圳 市 精 拓 金 电 子 有 限 公 司					
公 差 一 览 表 TOLERANCE UNLESS OTHERWISE				单 位 UNITS	MM	制 图 DRAWING	Z-Y-B	产 品 料 号 PRODUCT PART NO.	902-232A2021D10100
X.	±0.25	X'.	±5'	比 例 SCALE	1:1	审 核 CHKD	雷 永 键	产 品 名 称 PRODUCT NO.	AF90度内扣直脚有边内弹铜壳
.X	±0.20	.X'	±2'	日 期 DATE	2009/10/20	核 准 APPD	雷 永 键	角 法 VIEW	AF90度内扣直脚有边内弹铜壳
.XX	±0.15	.XX'	±1'					版 本 VER	T型LCP黑胶
.XXX	±0.10	.XXX'	±0.5'						