


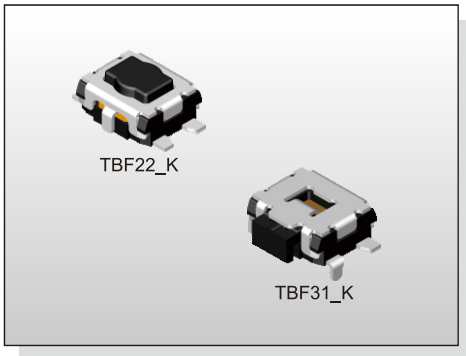

FEATURES

- ※Miniature 2.9x3.5mm
- ※Vertical or side actuation
- ※Long operating life


APPLICATION

- ※Mobile phone
- ※Consumer electronics
- ※Automotive


SPECIFICATION

Contact Rating	10μA, 2V DC to 20mA, 15V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 100V DC
Dielectric Strength	250V AC/1 minute
Operating Force	100±50/160±50/240±80/350±100gf (Vertical Push) 160+70/-40, 220+80/-70gf (Side Push)
Travel	0.15mm (Vertical Push) 0.20mm (Side Push)
Operating Life	100,000 cycles for Side Push 200,000 cycles for 160/240/350gf 1,000,000 cycles for 100gf (Vertical Push)
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

HOW TO ORDER

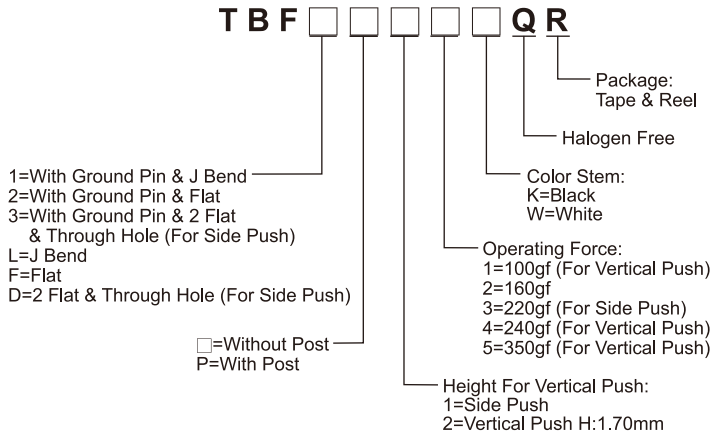




CIRCUIT

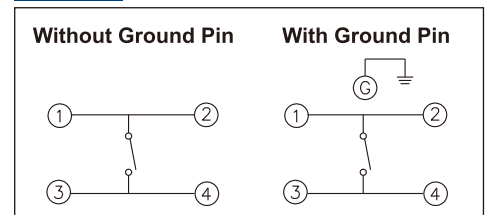

PACKAGE




<Tape & Reel>
3000 pcs

TBF31 ☐

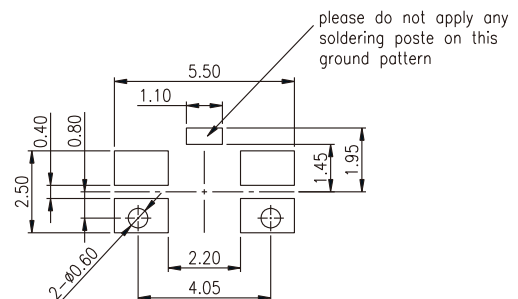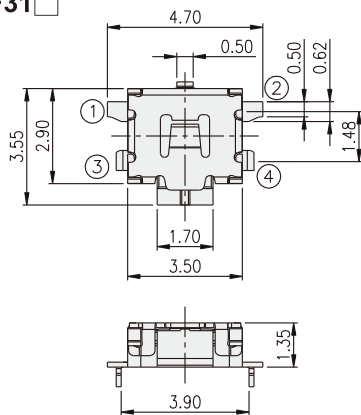




P.C.B. LAYOUT

TBFFP1 ☐

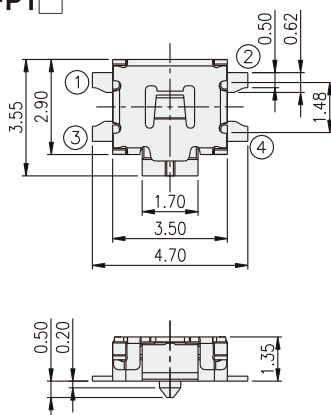




P.C.B. LAYOUT

TBF12 □

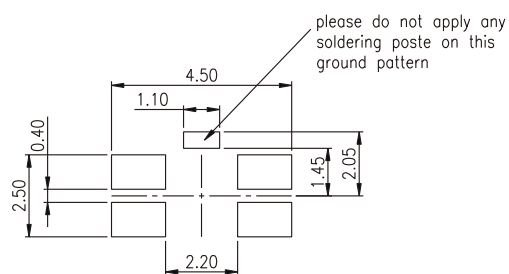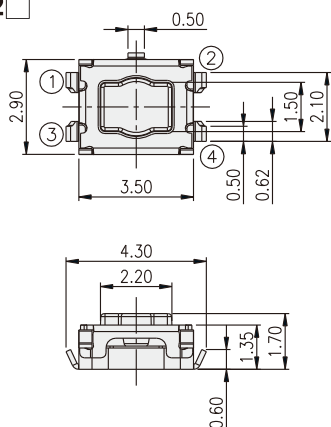

P.C.B. LAYOUT

TBFF2 □



P.C.B. LAYOUT

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diptronics:

[TBFD12KQR](#) [TBFLP12KQR](#) [TBFF13KQR](#) [TBF2P22KQR](#) [TBFF24KQR](#) [TBF312KQR](#) [TBFF22KQR](#) [TBFD13WQR](#)
[TBF313KQR](#) [TBFL21KQR](#) [TBFFP13KQR](#) [TBF122KQR](#) [TBF124KQR](#) [TBFL22KQR](#) [TBFL13KQR](#) [TBFL25KQR](#)
[TBF121KQR](#) [TBF222KQR](#) [TBF125KQR](#) [TBFF12KQR](#) [TBF2P13KQR](#) [TBFF21KQR](#) [TBFFP12KQR](#) [TBF221KQR](#)
[TBF213KQR](#) [TBF2P12KQR](#) [TBFL24KQR](#)