


CONFIGURATION	PART NUMBER	LENGTH
MINI, 5 PIN DEVICENET THICK, C.F MALE PLUG STRAIGHT, FEMALE PLUG STRAIGHT	MN57A4AD01Mxxx	AS REQUESTED

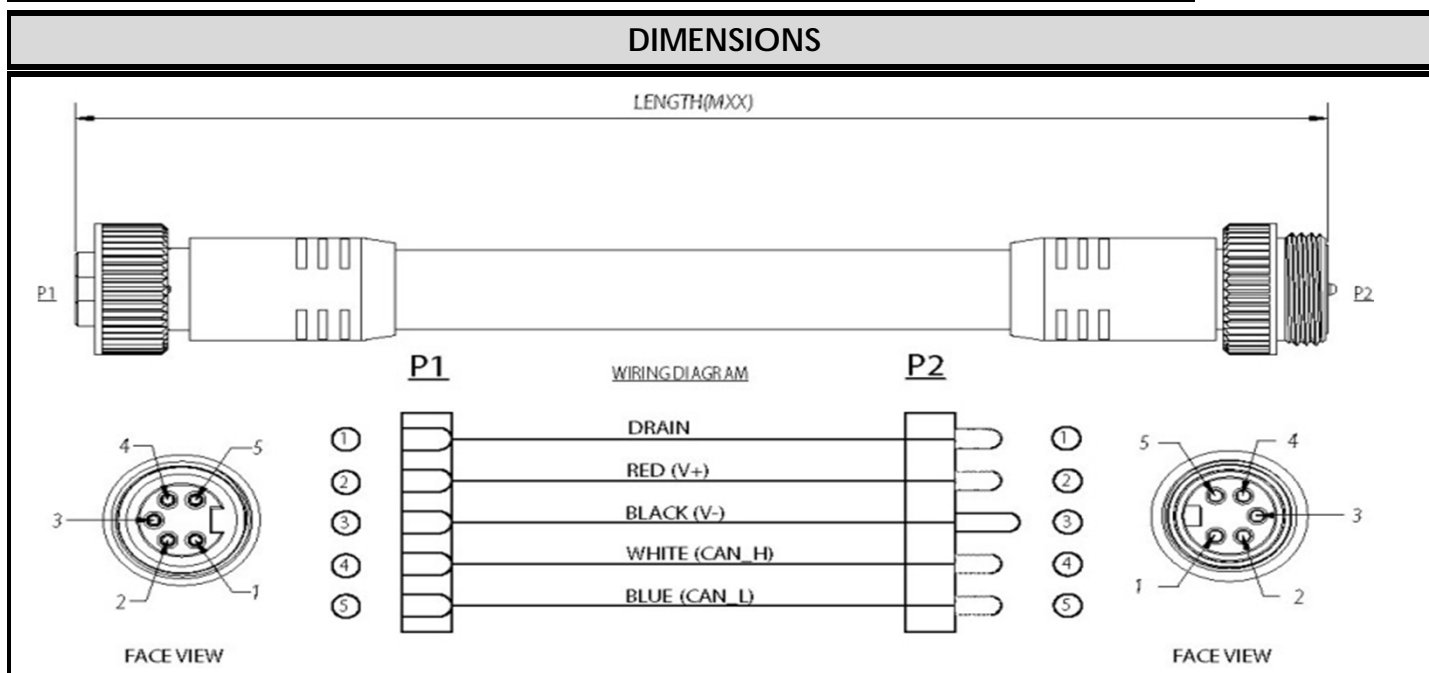

TECHNICAL DATA	
APPROVALS:	UL, c(UL)
TEMPERATURE RANGE:	-20C to +105C
PROTECTION:	IP 67, NEMA 6P
VOLTAGE RATING:	600VAC
AMPERAGE:	8A
HOUSING:	OIL RESISTANT PVC
CONTACTS:	COPPER ALLOY
CONTACT PLATING:	GOLD OVER NICKEL PLATING
CONNECTOR FACE:	PVC
CHARACTERISTICS:	MACHINED ALUMINUM, ANODIZED
NOTES:	GREY PVC, (UL) TYPE CMG 75°C OR c(UL) TYPE CMG 75°C SHIELDED OR TYPE PLTC 75°C 1PR/18 AWG AND 1PR/15 AWG OR AWM STYLE 2464, CSA AWM II A/B 80°C 300V FT4 RoHS COMPLIANT. <i>CONSULT FACTORY FOR OTHER OPTIONS.</i>