

1424514

https://www.phoenixcontact.com/us/products/1424514

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: PA, application: Standard, external cable diameter 4. 5 mm ... 10 mm, shielding: no, connecting thread: M16 x 1.5, color: lightgray RAL 7035

## Commercial data

Item number	1424514
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	BF68
Product key	BF7DCX
GTIN	4055626374192
Weight per piece (including packing)	10.36 g
Weight per piece (excluding packing)	10.36 g
Customs tariff number	39269097
Country of origin	DE



1424514

https://www.phoenixcontact.com/us/products/1424514

## Technical data

## Mounting

Thread type	()
Assembly note	Mount screw connection support in the housing using the correct torque 2) Insert cable 3) Tighten union nut using the correct torque

## Product properties

Product type	Cable screw gland
Application	Standard
No. of conductors	1
Manufacturer	WISKA
Manufacturer Designation	ESKV-L 16
Shielded	no
Execution of the strain relief	A

#### Data management status

Article revision (
--------------------

### Ex data

Suited for EX-applications	no
----------------------------	----

## Characteristics

Category of shock impact	2
Design, Strain relief	A

#### **Dimensions**

Dimensional drawing	20 20 20
Length	37 mm
Length of the connecting thread	15 mm
Hole diameter	16.1 mm 16.2 mm
Wrench size, union nut	20 mm
Wrench size, support	20 mm
Hexagon angular dimension	22 mm
Thread type connection side	M16 x 1.5
Thread pitch	1.5 mm

## Connection data

Tightening torque 1.5 Nm (Union nut)
--------------------------------------



1424514

https://www.phoenixcontact.com/us/products/1424514

		3.5 Nm (Support sleeve)
Material specifications		
	Color	light gray (RAL 7035)
	Seal material Cable seal	EPDM
	Material for screw connection	PA
Cable/line		
	External cable diameter Cable 1	4.5 mm 10 mm
	External cable diameter	6 mm 8.6 mm (UL)
Environmental and real-life conditions  Ambient conditions		
	Degree of protection	IP68 (5 bar / 0.5 h)
		IP69
	Ambient temperature (operation)	-40 °C 100 °C (static)




1424514

https://www.phoenixcontact.com/us/products/1424514

## Drawings

## Dimensional drawing

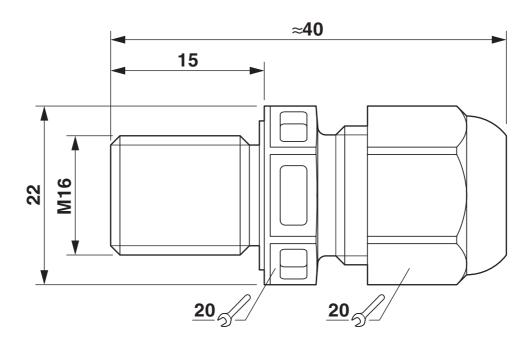



1424514

https://www.phoenixcontact.com/us/products/1424514

## **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1424514



**cUL Recognized**Approval ID: E179850



**UL Recognized**Approval ID: E179850

cULus Recognized



1424514

https://www.phoenixcontact.com/us/products/1424514

## Classifications

### **ECLASS**

UNSPSC 21.0

	ECLASS-11.0	27144432
	ECLASS-12.0	27140801
	ECLASS-13.0	27140801
ETIM		
	ETIM 9.0	EC000441
UN	SPSC	

39121300



1424514

https://www.phoenixcontact.com/us/products/1424514

## Environmental product compliance

EU RoHS		
Fulfills EU RoHS substance requirements	Yes, No exemptions	
China RoHS		
Environment friendly use period (EFUP)	EFUP-E	
	No hazardous substances above the limits	
EU REACH SVHC		
REACH candidate substance (CAS No.)	No substance above 0.1 wt%	



1424514

https://www.phoenixcontact.com/us/products/1424514

#### Accessories

A-INL-M16-P-LG - Counter nut

1417660

https://www.phoenixcontact.com/us/products/1417660

Counter nut, for threads M16 x 1.5, color: light gray



## SEALING PLUG 8X16 RD - Sealing plug

1400257

https://www.phoenixcontact.com/us/products/1400257



Sealing plug, color: red

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com