

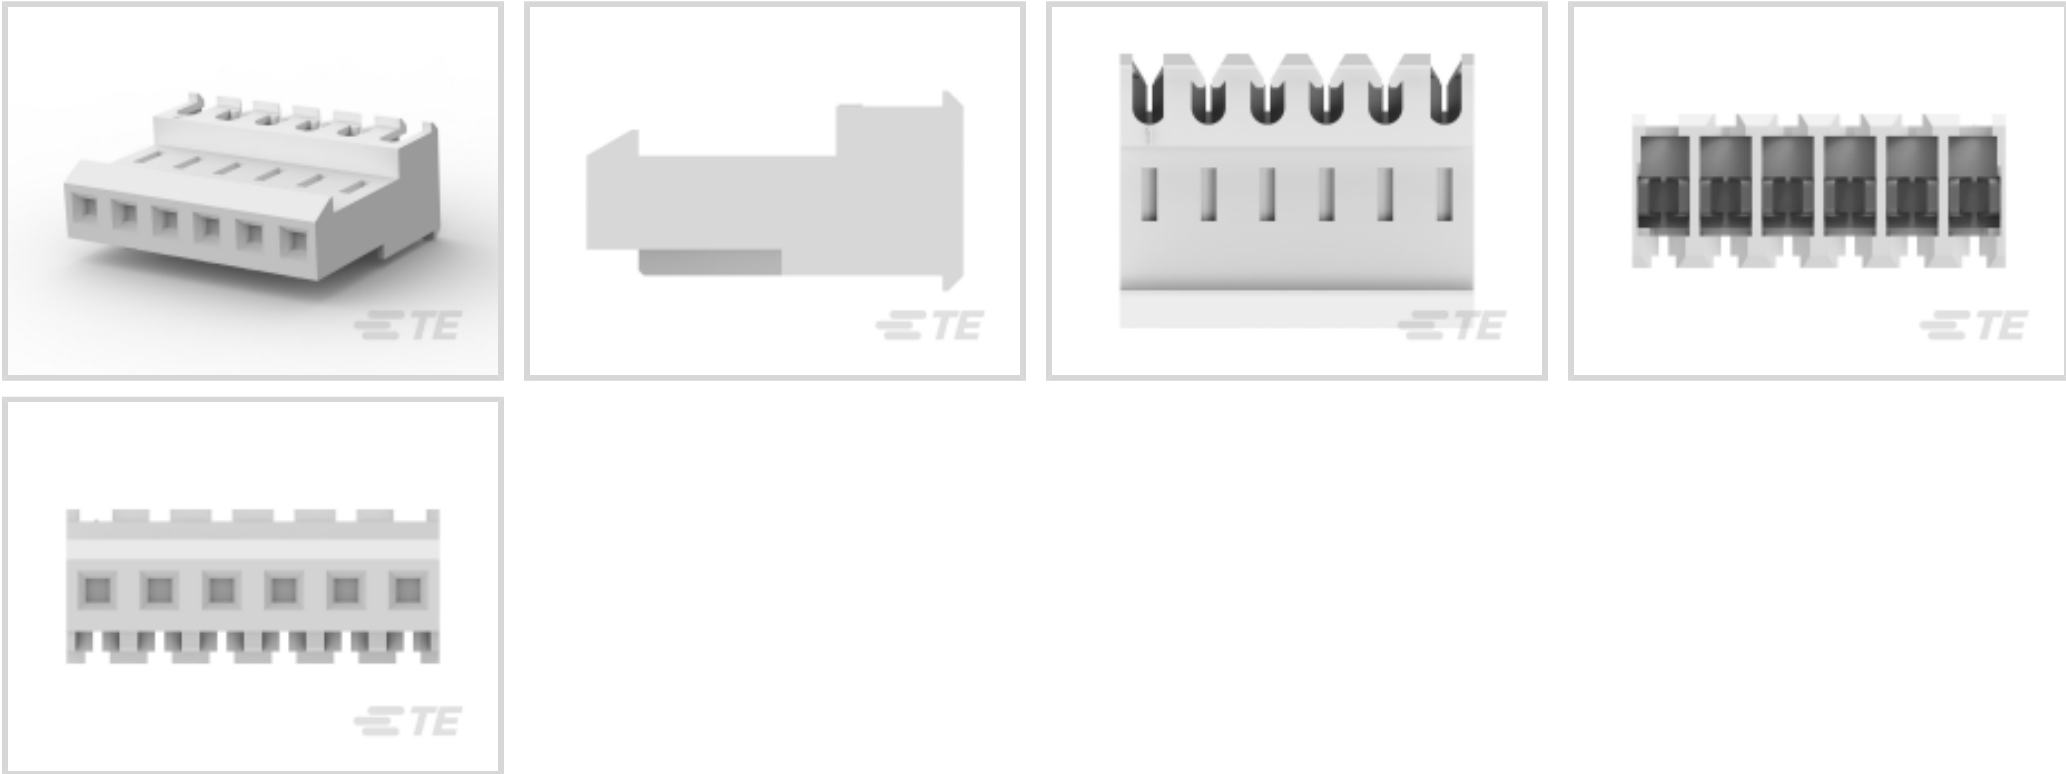


MTA 156

TE Internal #: 3-640602-6  
Connector Assembly, Receptacle, Wire-to-Board, 6 Position, 3.96 mm [.156 in] Centerline, Wire & Cable, UL 94V-2, MTA 156, Rectangular Power Connectors

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Connector Assembly**  
Connector & Housing Type: **Receptacle**  
Connector System: **Wire-to-Board**  
Number of Positions: **6**  
Centerline (Pitch): **3.96 mm [.156 in]**

Features

Product Type Features

|                                    |                    |
|------------------------------------|--------------------|
| Compatible With Discrete Wire Type | Stranded           |
| Rectangular Power Connector Type   | Connector Assembly |
| Connector & Housing Type           | Receptacle         |
| Connector System                   | Wire-to-Board      |
| Sealable                           | No                 |
| Connector & Contact Terminates To  | Wire & Cable       |

Configuration Features

|                           |   |
|---------------------------|---|
| Number of Positions       | 6 |
| Number of Power Positions | 6 |
| Number of Rows            | 1 |

Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 600 VAC |
|-------------------|---------|

Body Features

|                  |     |
|------------------|-----|
| Cable Exit Angle | 90° |
|------------------|-----|



|                                                 |                               |
|-------------------------------------------------|-------------------------------|
| Connector Profile                               | Standard                      |
| Contact Features                                |                               |
| Contact Layout                                  | Inline                        |
| Contact Underplating Material Thickness         | 30 µm[.762 µin]               |
| Wire Contact Termination Area Plating Thickness | 2.03 – 5.08 µm[80 – 200 µin]  |
| Contact Mating Area Plating Material            | Tin                           |
| Contact Mating Area Plating Material Finish     | Matte                         |
| Contact Underplating Material                   | Nickel                        |
| Contact Base Material                           | Copper Alloy                  |
| Contact Current Rating (Max)                    | 7 A                           |
| Contact Retention Within Housing                | With                          |
| Contact Type                                    | Receptacle                    |
| Wire Contact Termination Area Plating Material  | Tin                           |
| Contact Mating Area Plating Material Thickness  | 2.03 µm[80 µin]               |
| Termination Features                            |                               |
| Termination Method to Wire & Cable              | Insulation Displacement (IDC) |
| Mechanical Attachment                           |                               |
| Strain Relief                                   | With                          |
| Mating Retention                                | With                          |
| Mating Alignment                                | Without                       |
| Contact Retention Type Within Housing           | Locking Lance                 |
| PCB Mount Alignment                             | Without                       |
| Panel Mount Feature                             | Without                       |
| PCB Mount Retention                             | Without                       |
| Mating Retention Type                           | Locking Ramp                  |
| Connector Mounting Type                         | Cable Mount (Free-Hanging)    |
| Housing Features                                |                               |
| Wire & Cable IDC Installation Type              | Feed Through                  |
| Centerline (Pitch)                              | 3.96 mm[.156 in]              |
| Housing Color                                   | White                         |
| Housing Material                                | Nylon                         |
| Dimensions                                      |                               |
|                                                 |                               |



|                                      |                    |
|--------------------------------------|--------------------|
| Connector Height                     | 9.78 mm[.385 in]   |
| Product Length                       | 23.77 mm[.936 in]  |
| Compatible Insulation Diameter Range | 2.41 mm[.095 in]   |
| Wire Size                            | .2 mm <sup>2</sup> |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |                |
|---------------------|----------------|
| Circuit Application | Power & Signal |
|---------------------|----------------|

Industry Standards

|                                             |                               |
|---------------------------------------------|-------------------------------|
| CSA Rating                                  | Certified, LR 7189            |
| UL Rating                                   | Recognized                    |
| Compatible With Agency/Standards Products   | CSA, UL                       |
| Compatible With Approved Standards Products | UL E28476                     |
| UL Flammability Rating                      | UL 94V-2                      |
| Glow Wire Rating                            | Standard Part - Not Glow Wire |

Packaging Features

|                    |     |
|--------------------|-----|
| Packaging Quantity | 250 |
| Packaging Method   | Bag |

Product Compliance

For compliance documentation, visit the product page on TE.com>

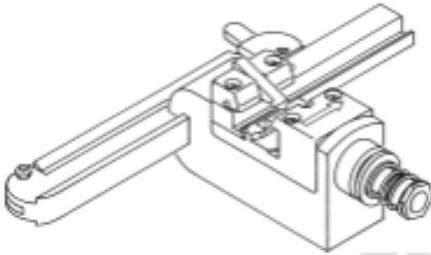
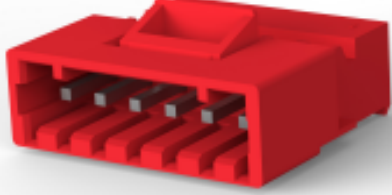
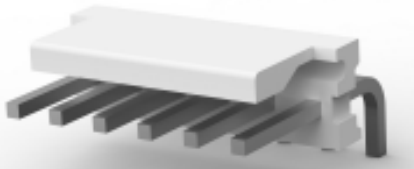
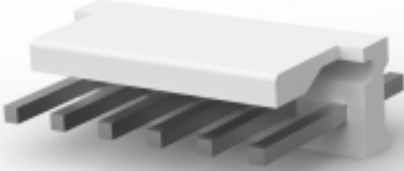
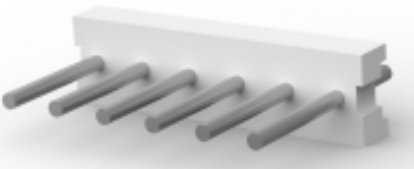
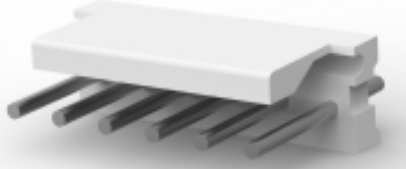
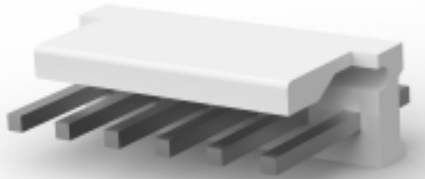
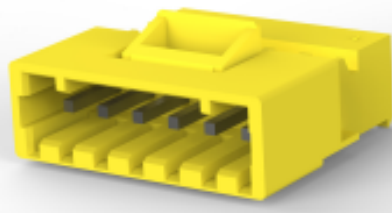
|                                               |                                                                                                                                |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                      |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                      |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                        |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JAN 2023 (233)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                            |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                   |

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

|                                                                                                                                                      |                                                                                                                                                  |                                                                                                                                                               |                                                                                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>TE Part # 58074-1<br/>MTA 50/100/156 MANUAL TOOL<br/>FRAME</p> |  <p>TE Part # 59804-1<br/>MAINTENANCE TOOL</p>                 |  <p>TE Part # 58443-1<br/>MTA 156 CRIMP HEAD PRODUCTION<br/>FEED THRU</p> |  <p>TE Part # 3-641437-6<br/>06P MTA156 PSTD CONN ASSY RED</p> |
|  <p>TE Part # 640389-6<br/>06P MTA156 HDR ASSY SQ R/A F/L</p>     |  <p>TE Part # 643067-6<br/>06P MTA156 MOLDED COVER</p>        |  <p>TE Part # 640551-6<br/>06P MTA156 COVER</p>                          |  <p>TE Part # 644752-6<br/>06P MTA156 HDR ASSY SQ STR F/L</p>  |
|  <p>TE Part # 640384-6<br/>06P MTA156 HDR ASSY STR RND SN</p>     |  <p>TE Part # 640388-6<br/>06P MTA156 HDR ASSY RN STR F/L</p> |  <p>TE Part # 640385-6<br/>06P MTA156 HDR ASSY SQ R/A</p>                |  <p>TE Part # 640643-6<br/>06P MTA156 COVER F/T</p>            |
|  <p>TE Part # 640383-6<br/>06P MTA156 HDR ASSY STR SQ SN</p>      |  <p>TE Part # 640445-6<br/>06P MTA156 HDR ASSY FL/STR SN</p>  |  <p>TE Part # 3-641436-6<br/>06P MTA156 PST CONN ASSY LF</p>             |  <p>TE Part # 3-644615-6<br/>06P MTA156 POL HDR ASSY LF</p>    |



TE Part # 3-641435-6  
06P MTA156 CONN ASSY ORNG

TE Part # 643071-6  
06P MTA156 FD-THRU COVER

TE Part # 644753-6  
06P MTA156 HDR ASSY RN STR F/L

TE Part # 3-641438-6  
06P MTA156 PSTD CONN ASSY WHT

Also in the Series | MTA 156

Connector Caps & Covers(89)

Connector Contacts(4)

Connector Hardware(2)

Insertion & Extraction Tools(1)

PCB Headers & Receptacles(677)

Rectangular Power Connectors(331)

Standard Rectangular Connectors(336)

Customers Also Bought

TE Part #788155-2  
SLD CPC RCPT ASSY,11-4,REV SEX

TE Part #640383-8  
08P MTA156 HDR ASSY STR SQ SN

TE Part #5749265-1  
Mini DIN, 6 pos, R/A, Shield

TE Part #66100-4  
III+ SKT,18-16,30AU/FL,STRIP

TE Part #963243-1  
EINZELDRAHTDICHTUNG

TE Part #1-640383-2  
12P MTA156 HDR ASSY STR SQ SN

TE Part #643071-9  
09P MTA156 FD-THRU COVER

TE Part #927836-2  
SPT REC 6.3 Contact SWS Sn



Documents

Product Drawings

06P MTA156 CONN ASSY 24AWG LF

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_3-640602-6\_V.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_3-640602-6\_V.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_3-640602-6\_V.3d\_stp.zip

English

3D PDF

English

Customer View Model

ENG\_CVM\_3-640602-6\_Z.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_3-640602-6\_Z.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_3-640602-6\_Z.2d\_dxf.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

Japanese

Application Specification

English

MTA 156 Ribbon Cable Connector Assemblies (English And Spanish)



English

[MTA 156 Ribbon Cable Connector Assemblies \(English And Spanish\)](#)

Japanese

[Application Specification](#)

English

---

[Agency Approvals](#)

[Agency Approval Document](#)

English