


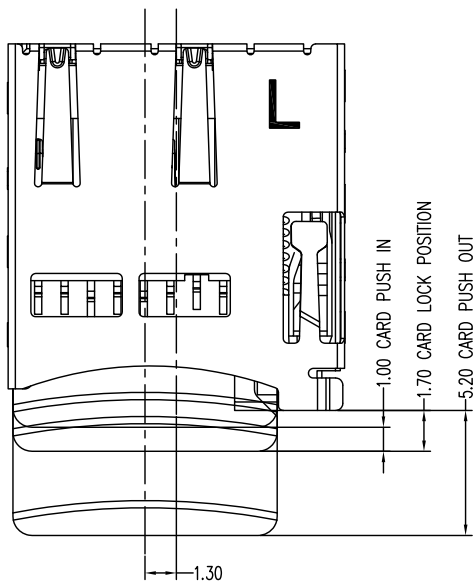

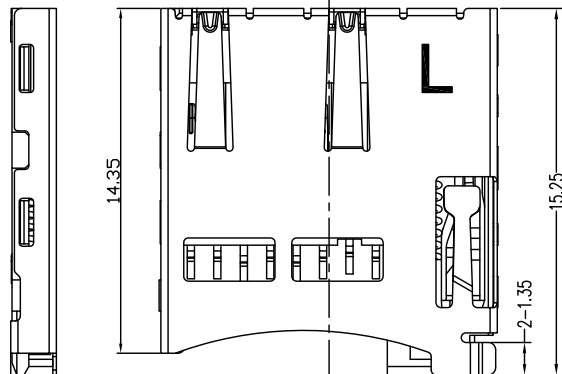



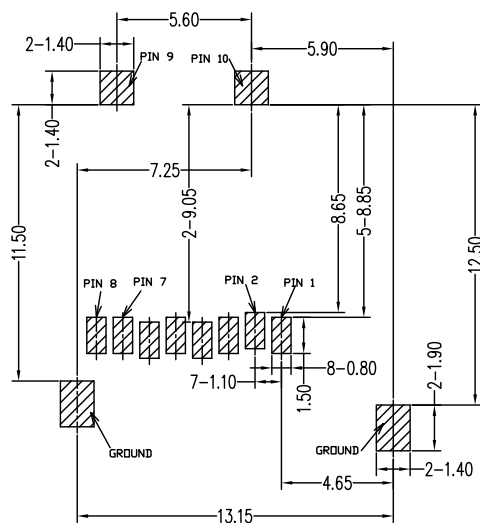

INSERT THE CARD STATUS

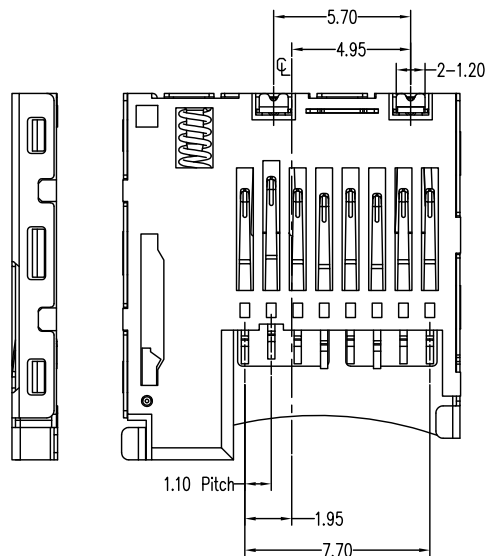

RECOMMENDED PCB LAYOUT
(ALL TOLERANCE ARE ± 0.05)

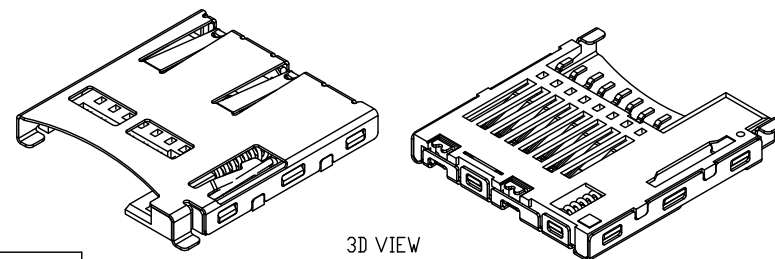


3D VIEW

SPECIFICATION

- 1.ELECTRICAL CHARACTERISTICS:
CONTACT CURRENT RATING:0.5 AMPERES.
DIELECTRIC WITHSTANDING VOLTAGE:AC500VR.M.S.
LLNSULATION RESISTANTE:1000M Ω MINIMUM.
CONTACT RESISTANTE:100m Ω MAXIMUM.
- 2.MECHANICAL CHARACTERISTICS:
MATING CYELES:5,000 INSERTIONS.
INSERTION FORCE: 2.0KGF MAX.
EXTRACTION FORCE: 0.4KGF MIN.
- 2.ENVIRONMENTAL:
OPERATING TEMPERATURE:-20℃~+85℃.
- 3.MATERIAL:
HOUSING:H1-TEMP PLASTIC LCP UL 94V-0 RATED
CANTACT: COPPER ALLOY(T=0.15MM).
SHELL:STAINLESS STEEL(T=0.15MM).

CIRCUIT: CD GROUND		
WITHOUT CARD		
CIRCUIT: CD GROUND		
CARD INSERTED		
Pin No.		MICRO SD
PIN1	DAT2	1P
PIN2	CD/DAT3	2P
PIN3	CMD	3P
PIN4	VDD	4P
PIN5	CLK	5P
PIN6	VSS	6P
PIN7	DAT0	7P
PIN8	DAT1	8P
PIN9	CARD DETECT	
PIN10		

 深圳市万骏达电子有限公司 http://www.wanjunda.com		图号 (DWG NO)		单位(UNIT): MM
		本 (REV)		比例(SCALE) 1:1
品名 (ITEM NO)	TF CARD PUSH PUSH 1.85	日期 (DATE)		 未注公差 TOLERANCE UNSPECIFIED X.X ± 0.30 X.XX ± 0.15 X.XXX ± 0.10 X" $\pm 5^\circ$ X.X" $\pm 2^\circ$
料号 (PART NO)	TF-PUSH-1.8H-02	设计 (DESIGN)		
模号 (MODEL NO)		审核 (CHECKED)		
		核准 (APPROVED)		