


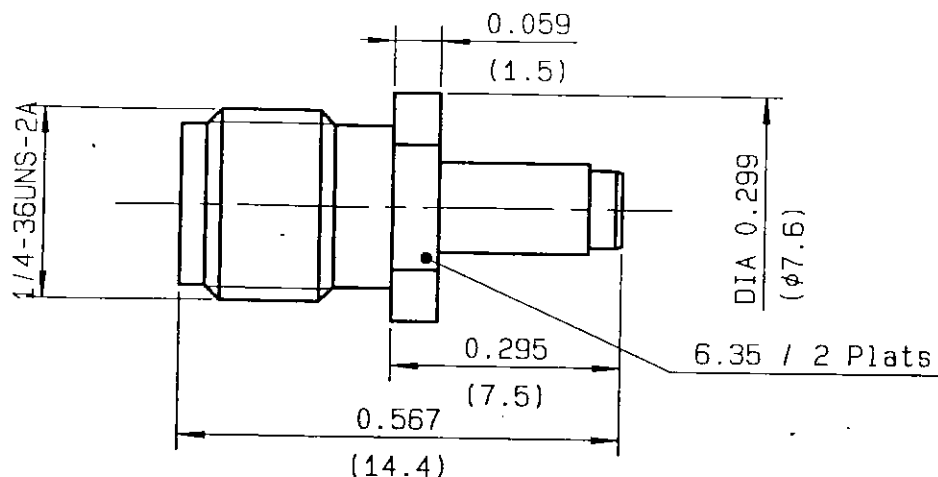

CHARACTERISTICS

NOMINAL IMPEDANCE	50 Ω
FREQUENCY RANGE	0-8 GHz
TEMPERATURE RATING	-25/+125 °C
VSWR	TBD + - x F(GHz)Max1
RF INSERTION LOSS	TBD $\sqrt{F}$ (GHz) dB Max1
VOLTAGE RATING	170 Vrms Max
DIELECTRIC WITHSTANDING VOLTAGE	500 Vrms min
INSULATION RESISTANCE	5000 M Ω min
HERMETIC SEAL	- oo/s NA Atm.cm3/s
LEAKAGE (pressurized only)	- psi NA MPa
TIGHT	0 Oz 9

STANDARDISATION

CABLE RETENTION	0 lb min NA N
CENTER CONTACT RETENTION	
Axial force - mating end	2.25 lb min 10 N
Axial force - opposite end	2.25 lb min 10 N
Torque (Min)	0 Inch.oz NA cm.N
RECOMMENDED TORQUES	
Mating	0 Inch.lb NA cm.N
Panel nut	0 Inch.lb NA cm.N
Clamp nut	0 Inch.lb NA cm.N

CONSTRUCTION

CONNECTOR PARTS	MATERIALS	FINISH
BODY	STAINLESS STEEL	PASSIVATED
OUTER CONTACT	-	-
CENTER CONTACT	BERYLLIUM COPPER	GOLD
INSULATOR	PTFE	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

ISSUE	REVISION No	DESCRIPTION	BY	DATE
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
-	-	-	-	-

Initiated on 11/05/95

The information given here is subject to change without notice. Design changes may be in order to improve the product.



Approval by PEYRET

MASTRIANO