
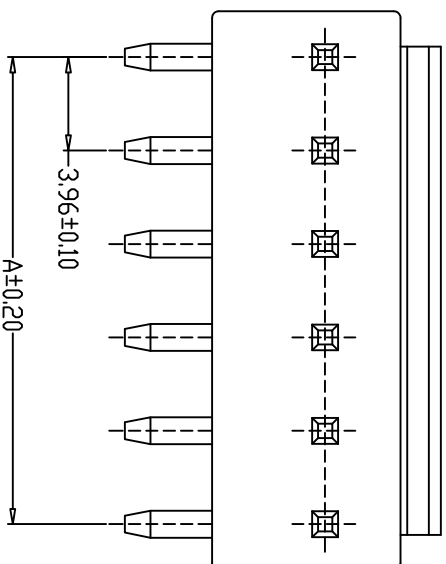
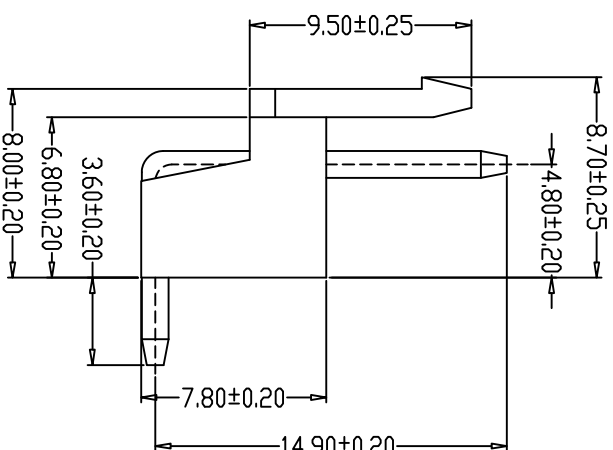


PCB LAYOUT

SPECIFICATIONS

- 1、Current Rating: 7A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltage: 1500V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
A3961-02AWGD	3.96	7.92
A3961-03AWGD	7.92	11.88
A3961-04AWGD	11.88	15.84
A3961-05AWGD	15.84	19.80
A3961-06AWGD	19.80	23.76
A3961-07AWGD	23.76	27.72
A3961-08AWGD	27.72	31.68
A3961-09AWGD	31.68	35.64
A3961-10AWGD	35.64	39.60
A3961-11AWGD	39.60	43.56
A3961-12AWGD	43.56	47.52

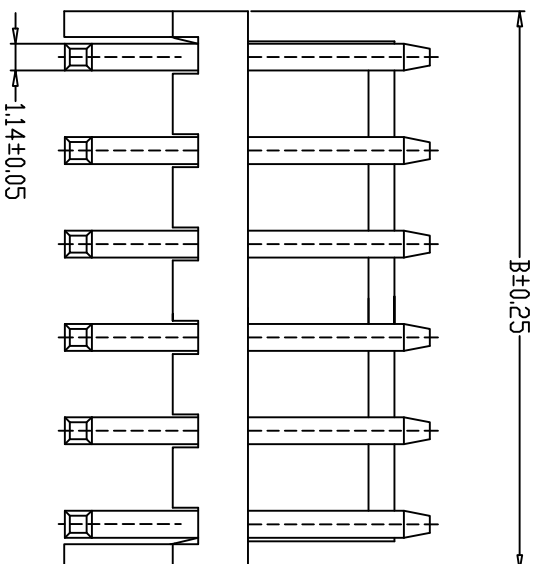

单位 UNIT	mm
比例 SCALE	
X. ±0.5	X* ±
. X ±0.30	. X* ±
. XX ±0.20	. XX* ±
. XXX ±0.005, XXX* ±	

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd

核准: APPROVED BY	版本: A0	产品名称 Production name	VH定位高弯 WAFER DIP TYPE
审核: CHECKED BY	页次: 1/1	产品料号 Product No	TH-A3961-NAWGD
制图: DRAWN BY	封文辉 2022.9.5	日期:	
客户料号 Client No			