




Connectors > PCB Connectors > PCB Headers & Receptacles > Signal Header

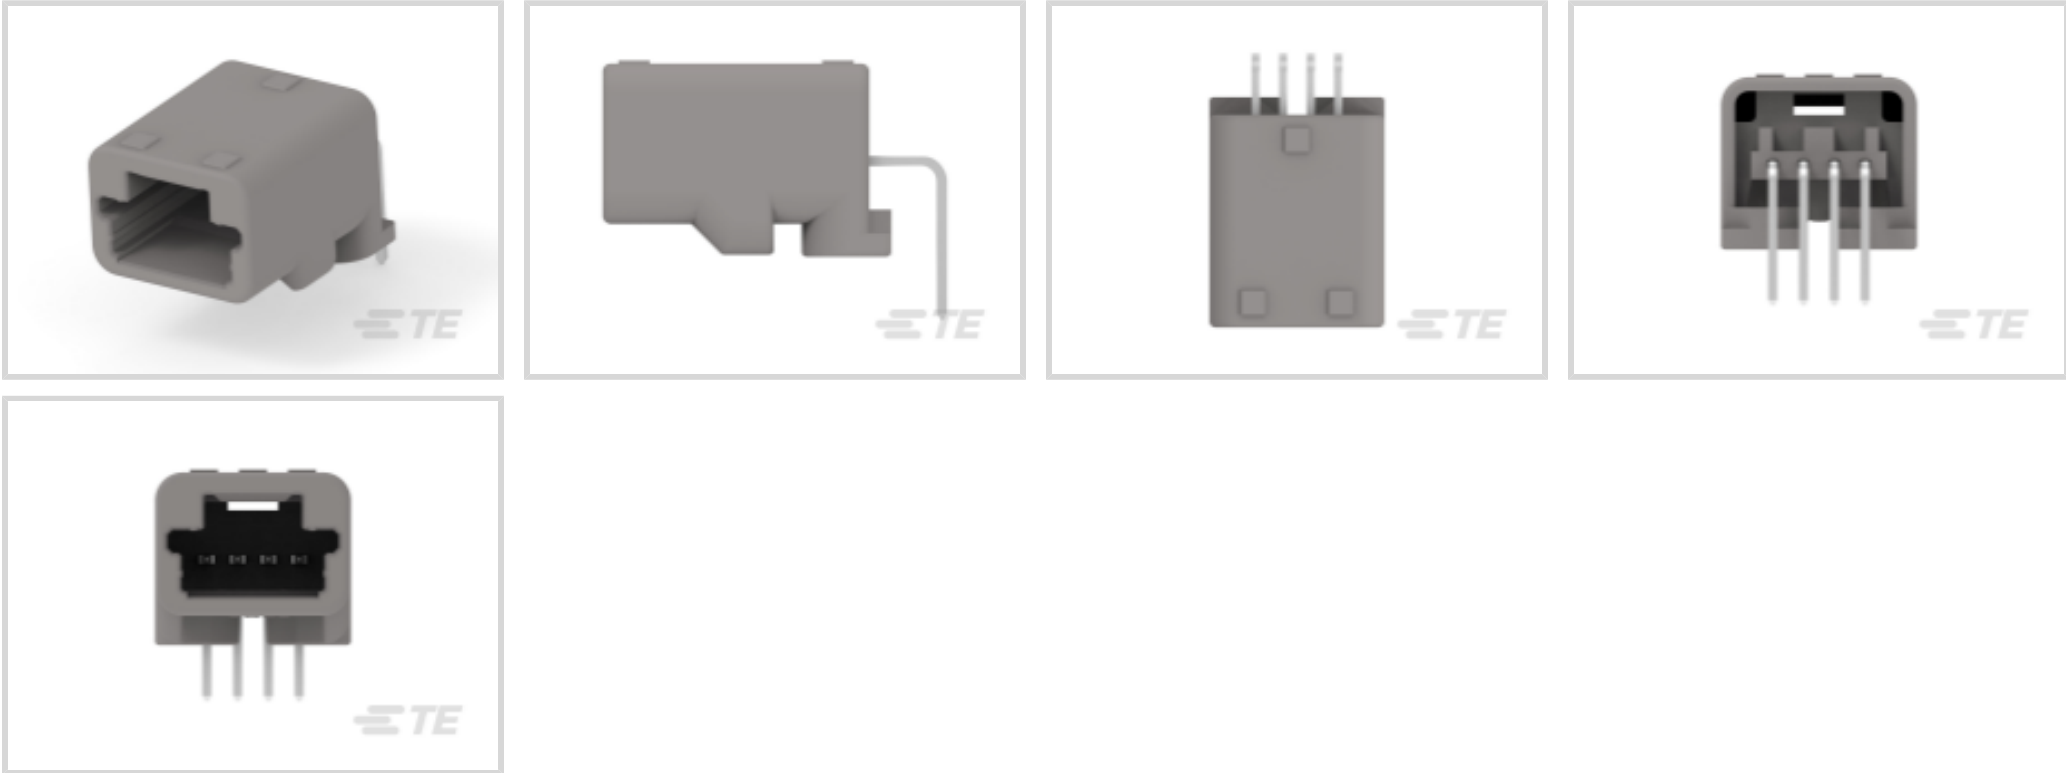

Connector System: **Wire-to-Board**
Number of Positions: **4**
Centerline (Pitch): **2.2 mm [.087 in]**
Sealable: **No**
PCB Mount Orientation: **Horizontal**

[All Signal Header \(280\)](#)

Features

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Header
Header Type	Fully Shrouded
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Sections	1
Number of Signal Positions	4
Number of Positions	4
PCB Mount Orientation	Horizontal
Number of Rows	1



Electrical Characteristics

Voltage Rating (Max)	12 VDC
Nominal Voltage Architecture	12 V
Operating Voltage	12 VDC

Body Features

Primary Product Color	Gray
Connector & Keying Code	2

Contact Features

Contact Size	.64mm
Contact Type	Tab
Mating Tab Width	.64 mm[.025 in]
Mating Tab Thickness	.64 mm[.025 in]
Contact Mating Area Plating Material	Tin

Termination Features

Termination Method to PCB	Through Hole - Solder
---------------------------	-----------------------

Mechanical Attachment

Mounting Holes	With
Mating Retention	With
Mating Alignment	With
PCB Mount Alignment	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Locking Interface

Housing Features

Centerline (Pitch)	2.2 mm[.087 in]
--------------------	-----------------

Dimensions

Connector Length	21.97 mm[.865 in]
Connector Width	14 mm[.551 in]
PCB Thickness (Recommended)	1.2 – 1.6 mm[.047 – .063 in]
Profile Height from PCB	12.5 mm[.492 in]

Usage Conditions

Operating Temperature (Max)	65 °C, 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100
-----------------------------	---



	°C[149 °F][158 °F][167 °F][176 °F][185 °F] [194 °F][212 °F]
Operating Temperature Range	-30 – 100 °C[-22 – 212 °F]

Operation/Application

Shielded	No
Circuit Application	Signal

Packaging Features

Packaging Quantity	30
Packaging Method	Tube

Other

Interface Number	1473672
------------------	---------

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 240°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

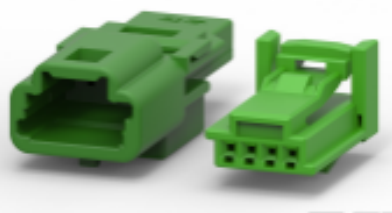


TE Part # CAT-T319-CH8172
TH/.025 CONNECTOR SYSTEM,
HOUSING

TE Part # 1565750-3
025 4POS CAP

Also in the Series | 0.64/025 Connector System




Automotive Connector Caps & Covers
(5)

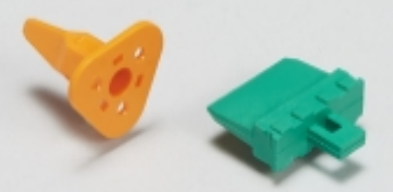

Automotive Connector Locks &
Position Assurance(1)



Automotive Housings(124)

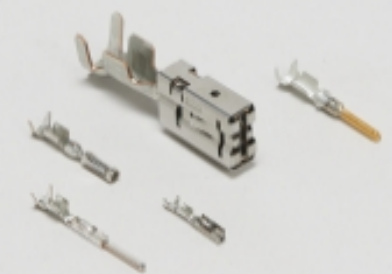


Automotive Terminals(16)



Connector Seals & Cavity Plugs(1)




Other Automotive Connector
Accessories(4)

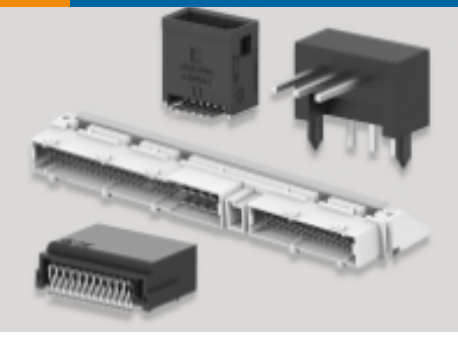

PCB Headers & Receptacles(154)


Customers Also Bought

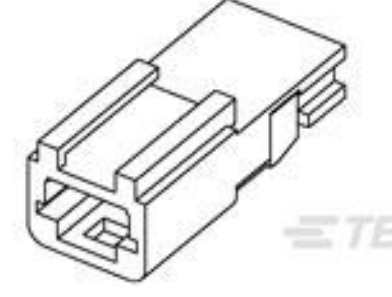

TE Part #1612035-1
025 G 4POS CAP W TO W



TE Part #1-1355154-1
MQS STIFTWANNE 18P

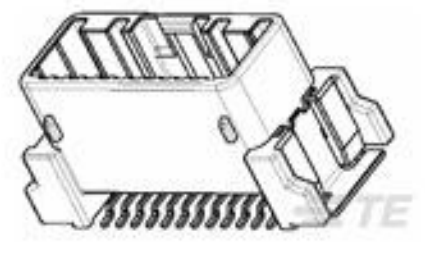

TE Part #1939403-2
0.64 SMD 8P CAP ASSY V-TYPE



TE Part #4-2177372-3
8POS,TAB 0.5X0.4,HEADER ASSY,
CODA



TE Part #1658462-1
MSB0.80RC-ASY040FL,-,30,-TY



TE Part #1-2300483-1
16POS,MIXED,HEADER ASSY



TE Part #1674311-7
0.64 III RCPT 3 Serrations Pre-Tin



TE Part #2306368-2
2P,MATE-AX,HDR ASSY,90DEG,COD B



TE Part #2306368-3
2P,MATE-AX,HDR ASSY,90DEG,COD C



TE Part #2306368-4
2P,MATE-AX,HDR ASSY,90DEG,COD D

Documents

Product Drawings
025 4POS CAP ASSY

Japanese

CAD Files
Customer View Model
ENG_CVM_CVM_1565749-3_F.2d_dxf.zip

English

3D PDF

3D

Customer View Model
ENG_CVM_CVM_1565749-3_F.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_1565749-3_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications
Crimping of 025 Receptacle Contact

Japanese

Application Specification

Japanese

Instruction Sheets
.025 SERIES I/O CONNECTORS (H-Type 1Row 8Position)

Japanese



[Instruction Sheet \(non U.S.\)](#)

Japanese

[.025 SERIES I/O CONNECTORS \(H-Type 1Row 8Position\)](#)

Japanese

[Instruction Sheet \(non U.S.\)](#)

Japanese