


3-conductor ground terminal block; 10 mm²; suitable for Ex e II applications; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®

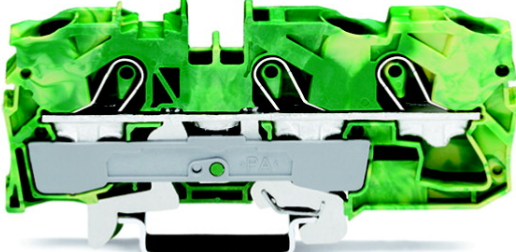

Item no.	2010-1307	GTN / EAN	401732076340
Content	1 piece	Order unit	piece
Order quantity	25 piece	Increase in order quantity	(25, 50, 75, 100, ...)
Customer item no.		Customs Tariff no.	85369010000
Customs duty for the country of origin	DE	Available	-
List price	On request	Net price	On request
Availability	On request		

Note: Some items may not be available from your local WAGO company. Please note that the quantities ordered in the shopping cart are rounded up to the PU (SPU).

RoHS ✓
Compliant



Article details	Approvals	Downloads/Certificates	Accessories
Description		3-conductor ground terminal block; 10 mm²; suitable for Ex e II applications; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®	
Remarks			
Item properties			
Miscellaneous			
Name	Value	Unit	
Connection technology	Push-in CAGE CLAMP®		
Activation type	Push-in		
Connectable conductor materials	Copper		
Nominal cross section	10 mm²		
Solid conductor	0.5 ... 16 mm² / 20 ... 6 AWG		
Solid conductor, push-in termination	2.5 ... 16 mm² / 14 ... 6 AWG		
Fine-stranded conductor	0.3 ... 16 mm² / 20 ... 6 AWG		
Fine-stranded conductor with ferrule, push-in termination, f	2.5 mm² / 14 AWG		
Strip length	17 ... 19 mm / 0.67 ... 0.75 Inch		
Total number of connection points	3		
Total number of potentials	1		
Number of levels	1		
Type of wiring	Front-entry wiring		
Width	10 mm / 0.394 in		
Height from upper edge of DIN-35 rail	36.9 mm / 1.453 in		
Depth	89 mm / 3.504 in		
Design	horizontal		
Type of mounting	Carrier rail 35 x 15		
Marking level	Center/side marking		
Color	green-yellow		
Insulating material	Polyamide 66 (PA 66)		
Fire load [MJ]	0.376	MJ	
Weight [g]	35.634	g	
Packaging type	BOX		
[mm]	10	mm	
Product Family	TOPJOB® S		
Main product function	GND cond. term. block		
Product type	Through rail-mount term. blocks		

Upwards