



Connectors > Contacts > Connector Contacts



Contact Type: **Socket**  
Contact Mating Area Plating Material: **Gold**  
Wire Contact Termination Area Plating Material: **Gold**  
Contact Retention Within Housing: **With**  
Contact Retention Type Within Housing: **Locking Spring**

Features

Product Type Features

|                    |                   |
|--------------------|-------------------|
| Discrete Wire Type | Solid or Stranded |
| Sealable           | No                |

Configuration Features

|                                   |               |
|-----------------------------------|---------------|
| Compatible With Wire & Cable Type | Discrete Wire |
|-----------------------------------|---------------|

Contact Features

|                                                       |                  |
|-------------------------------------------------------|------------------|
| Mating Pin Diameter                                   | 1.57 mm[.062 in] |
| Contact Underplating Material Thickness               | .76 µm[30 µin]   |
| Wire Contact Termination Area Plating Thickness       | .25 µm[10 µin]   |
| Wire Contact Termination Area Plating Material Finish | Bright           |
| Contact Mating Area Plating Material Thickness        | .76 µm[30 µin]   |
| Contact Orientation                                   | Straight         |
| Contact Underplating Material                         | Nickel           |
| Barrel Type                                           | Open             |
| Contact Type                                          | Socket           |



|                                                |         |
|------------------------------------------------|---------|
| Contact Mating Area Plating Material           | Gold    |
| Wire Contact Termination Area Plating Material | Gold    |
| Contact Retention Within Housing               | With    |
| Contact Size                                   | Size 16 |
| Contact Base Material                          | Brass   |
| Contact Current Rating (Max)                   | 13 A    |

Termination Features

|                                    |              |
|------------------------------------|--------------|
| Termination Method to Wire & Cable | Crimp        |
| Product Terminates To              | Wire & Cable |

Mechanical Attachment

|                                       |                |
|---------------------------------------|----------------|
| Wire Insulation Support               | With           |
| Contact Retention Type Within Housing | Locking Spring |

Dimensions

|                                      |                              |
|--------------------------------------|------------------------------|
| Compatible Insulation Diameter Range | 1.02 – 2.03 mm[.04 – .08 in] |
| Wire Size                            | .2 – .6 mm <sup>2</sup>      |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 150 °C[-67 – 302 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |                |
|---------------------|----------------|
| Circuit Application | Power & Signal |
|---------------------|----------------|

Packaging Features

|                    |      |
|--------------------|------|
| Packaging Quantity | 4000 |
| Packaging Method   | Reel |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |



|                           |                                                                                     |
|---------------------------|-------------------------------------------------------------------------------------|
| Halogen Content           | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability                                        |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

|                                                                     |                                                                  |                                                                  |                                                                 |
|---------------------------------------------------------------------|------------------------------------------------------------------|------------------------------------------------------------------|-----------------------------------------------------------------|
| <br>TE Part # 58495-2<br>PROCRIMPER DIE ASSY MULTIMATE              | <br>TE Part # 91505-1<br>CCII TYPE III+ 24-16 ASSY               | <br>TE Part # 200893-2<br>INSERTION TOOL CONT                    | <br>TE Part # 58495-1<br>PRO CRIMPER ASSY MULTIMATE             |
| <br>TE Part # 539972-1<br>EXTRACTION TOOL                           | <br>TE Part # 305183<br>EXTRACT TOOL TYPE 2 20-16                | <br>TE Part # 2151016-1<br>OCEAN_2.0_APPLICATOR-S-062F090O-RSM   | <br>TE Part # 2151016-2<br>OCEAN_2.0_APPLICATOR-S-062F090OA-RSA |
| <br>TE Part # 2305570-1<br>Strip Terminal Cutter-Side Feed-No Crimp | <br>TE Part # 5-2151016-1<br>OCEAN_2.0_APPLICATOR-S-062F090O-RSM | <br>TE Part # 5-2151016-2<br>OCEAN_2.0_APPLICATOR-S-062F090O-RSA | <br>TE Part # 7-2151016-7<br>OCEAN_2.0_SPARE_PART_KIT-062F090O  |

Also in the Series | AMP Type III+



Connector Contacts(400)



Insertion & Extraction Tools(4)

Customers Also Bought




TE Part #178289-5  
3.81 DYNAMIC REC HSG 10P D--D



TE Part #2201855-2  
Mini I/O Cable Conn. Piercing D1



TE Part #4-1473562-6  
RITS CONN. PLUG ASSY 6P GREEN

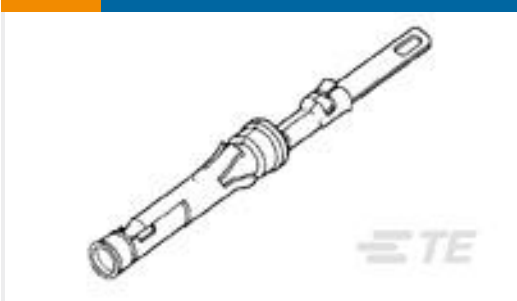


TE Part #202237-7  
III+SOC,SOLTAB,30AU>10,LP,SN




TE Part #320570  
SPlice BUTT PIDG 12-10



TE Part #175285-2  
DYNAMIC D-3 TAB CONT. M AU 0.38

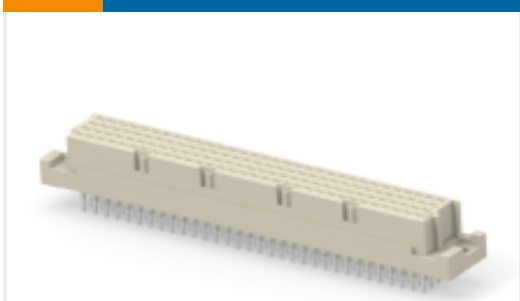

TE Part #244999-E  
STVCD 128 F ABCD VVV 7-00 EE 5,5  
\* 247



TE Part #4288010001  
RPS-10-2/2.0-S1-9

Documents

Product Drawings  
III+ SKT,24-20,30AU>10,STRIP  
English

CAD Files  
Customer View Model  
ENG\_CVM\_CVM\_66104-6\_BT.2d\_dxf.zip  
English  
3D PDF  
3D  
Customer View Model  
ENG\_CVM\_CVM\_66104-6\_BT.3d\_igs.zip  
English  
Customer View Model  
ENG\_CVM\_CVM\_66104-6\_BT.3d\_stp.zip  
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



---

**Product Specifications**

**Application Specification**

English

---

**Instruction Sheets**

**Instruction Sheet (U.S.)**

Japanese

**Instruction Sheet (U.S.)**

English