




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.04.30	阿树

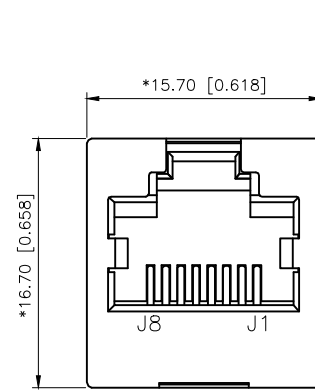


FRONT VIEW

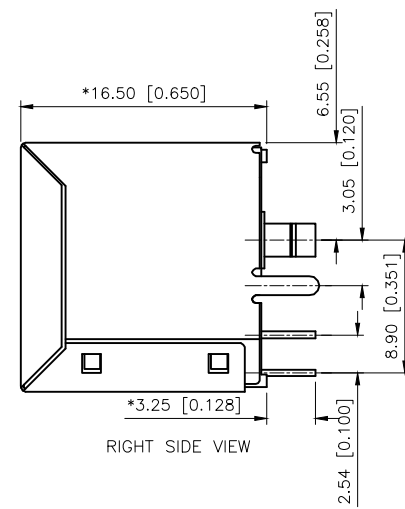


RIGHT SIDE VIEW



BACK VIEW




BOTTOM VIEW

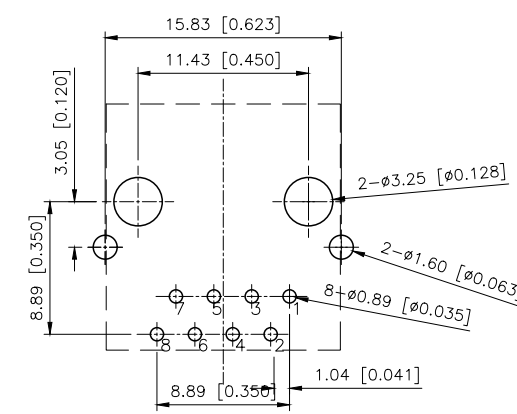

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

MATERIAL 材料:
HOUSING 胶壳:PBTUL94V-0 BLACK
TERMINAL 端子:PHOSPHOR BRONZE $\phi=0.46\text{MM}$,GOLD PLATING.
SHIELD 外壳:C2680.T=0.20MM,20U" MIN NICKEL PLATING ON ALL AREA.
MECHANICAL 机械的:
DURABILITY 工作寿命: 750CYCLES MIN,12.5 MM/MINUTE
INSERTION FORCE 插入力: 2.2KG F MAX
RETENTION STRENGTH 拔出力: 77KG.F BETWEEN JACK AND PLUG
OPERATING TEMPERATURE 工作温度:-40℃~+85℃
STORAGE TEMPERATURE 储存温度:-40℃~+85℃
ALL CRITICAL DIMENSIONS WITH"*"
ELECTRICAL 电气:
VOLTAGE 电压:125 VOLTS AC
CURRENT RATING 额定电流:15AMP
DIELECTRIC STRENGTH 介电强度: 1000 VAC RMS 50HZ OR 60HZ 1 MIN
INSULATION RESISTANCE 绝缘电阻:500MEGA OHMS MIN.INITIAL
AFTER500V DC FOR1 MINUTE
CONTACT RESISTANCE 接触电阻: SINGLETERMINAL30 MILLIOHMS MAX
INITIAL50 MILLIOHMS MAX.AFTER
DURABILITYTEST.



X05ADGWA1D8Y3022
1:Au=1U"
3:Au=3U"
4:Au=6U"
5:Au=15U"
6:Au=30U"

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: RJ JACK
CHECKED		UNIT: mm/in	PART NO.: X05ADGWA1D8Y3022
APPROVED		SIZE: A4	DWG NO.: